

HGT®



**SOLID
CARBIDE
TOOLS**

HGT®
**SOLID
CARBIDE
TOOLS**



SCAN
ME

HG TECHNOLOGY CO., LTD. mail: service@hgt.com.tw



HG TECHNOLOGY CO., LTD.,

located at Changhua, Taiwan, dedicated to developing, designing, producing, and marketing cutting tools, comprises professionals with sophisticated processing experience that provide extensive services and ensure total customer satisfaction.

Our service range extensively covers 3C, semiconductor, medical care equipment, aerospace, and precision molding industries.

HG Technology continuously develops more advanced processing technologies based on the enterprise philosophy of extending the lifespan of tools, increasing work efficiencies, minimizing production costs in terms of wear and tear of tools, and maximizing customer benefits.

For HGT Cutting Tools, from material to finished products, **HG Technology insists on utilizing the processes provided by the original European manufacturers for the production. We only use high quality and stable Carbide Rods, German and Swiss 6-axis CNC Grinding machines, advanced Swiss Coating technologies, and sophisticated German Digital Measuring Instruments.**

With reasonable prices and stable quality, HG Technology has an expanding sales network that currently covers more than 30 countries throughout the world. Based on the enterprise philosophy of maximizing customer's benefits, HG Technology continuously refines itself and grows together with all its customers.



ITEM PAGE STRUCTURE

- 1 Product Name
- 2 Item Code
- 3 Icons
- 4 Working Material and Applications
- 5 Product diagram
- 6 Product Image
- 7 Product specification

MAGIC CUT
QBN
Hardened Steels HRC65 series / 2 Flutes / Ball Nose

FEATURES

- 2 Flute Ball Nose for up to HRC65.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- Heat-resistant nAcOB Coating, excellent for dry machining; not recommended for working wet.

ITEMS

Order No.	Radius R	Flute Length L1	O.A.L L2	Shank Dia D2	Unit: mm
QBN 0104	R0.5	2	50	4	
QBN 0106	R0.5	2	50	6	
QBN 0154	R0.75	3	50	4	
QBN 0156	R0.75	3	50	6	
QBN 0204	R1	4	50	4	
QBN 0206	R1	4	50	6	
QBN 0303	R1.5	6	50	3	
QBN 0304	R1.5	6	50	4	
QBN 0306	R1.5	6	50	6	
QBN 0404	R2	8	50	4	
QBN 0406	R2	8	50	6	
QBN 0506	R2.5	10	50	6	
QBN 0606	R3	12	50	6	
QBN 0808	R4	16	60	8	
QBN 1010	R5	20	75	10	
QBN 1212	R6	24	75	12	
QBN 1616	R8	32	100	16	

NEO
| END MILLS |
30

THE SYSTEM CODE INTRODUCES

V	V70 Hardened Steels HRC70 series	14
Q	MAGIC CUT Hardened Steels HRC65 series	26
S	SUPER MILL For HRC60 steels series	54
E	EFFICIENCY MILLS For HRC55 steels series	94
I	I.pro Titanium & Stainless cutting series	123
D	D MILL Aluminum & Copper cutting series	138
G	G.pro Graphite cutting series	155
A	AX MILL Resin & Acrylic Cutting series	164
COM	COM.pro CFRP machining series	168
EX	MAGIC SHANK Exchangeable Head End Mills series	171
T	T.pro Thread milling series	175
C	C.pro Chamfering series	181
CD	CD Carbide drills series	186
CR	CR Carbide reamers series	198
DT	DEN.pro Dental end mills	200
INCH	INCH SPECIFICATION	210

HGT[®]
SOLID CARBIDE TOOLS



CONTENTS

V

V70

Page	Mill Dia.	Coating	HRC 45-55	HRC 55-60	HRC 60-65	HRC 65-70	Cast Iron	Titanium Alloy	Stainless Steels	Aluminum Alloy	Copper Alloy	Graphite	Superalloy, Heat-resistant Steels
14													
15	1-12	i-plus	⊙	⊙	⊙	⊙							
16	6-12	i-plus	⊙	⊙	⊙	⊙							
17	4-12	i-plus	⊙	⊙	⊙	⊙							
18	4-10	i-plus	⊙	⊙	⊙	⊙							
19	3-16	i-plus	⊙	⊙	⊙	⊙							
20	6-16	i-plus	⊙	⊙	⊙	⊙							
21	6-12	i-plus	⊙	⊙	⊙	⊙							
22	1-12	i-plus	⊙	⊙	⊙	⊙							
23	0.5-4	i-plus	⊙	⊙	⊙	⊙							
24	1-4	i-plus	⊙	⊙	⊙	⊙							
25	1-3	i-plus	⊙	⊙	⊙	⊙							
26													
Q	MAGIC CUT												
27	0.2-1.8	i-X	⊙	⊙	⊙								
28	1-16	ALTiN	⊙	⊙	⊙								
29	4-12	i-X	⊙	⊙	⊙								
30	1-16	nAcoB	⊙	⊙	⊙								
31	1-16	i8	⊙	⊙	⊙								
32	1-12	nAcoB	⊙	⊙	⊙								
33	1-12	i8	⊙	⊙	⊙								
34	2-20	ALTiN	⊙	⊙	⊙								
35	2-20	i8	⊙	⊙	⊙								
36	1-12	ALTiN	⊙	⊙	⊙								
37	0.2-1.8	i-X	⊙	⊙	⊙								
38	1-20	ALTiN	⊙	⊙	⊙								
39	4-12	i-X	⊙	⊙	⊙								
40	1-20	nAcoB	⊙	⊙	⊙								
41	3-20	i8	⊙	⊙	⊙								
42	6-12	ALTiN	⊙	⊙	⊙								
43	1-12	ALTiN	⊙	⊙	⊙								
44	4-12	i-X	⊙	⊙	⊙								
45	1-12	nAcoB	⊙	⊙	⊙								
46	3-12	nAcoB	⊙	⊙	⊙								
47	3-12	i8	⊙	⊙	⊙								
48	6-12	ALTiN	⊙	⊙	⊙								
49	6-12	i8	⊙	⊙	⊙								
50	0.5-4	ALTiN	⊙	⊙	⊙								
51	0.5-3	i-X	⊙	⊙	⊙								
52	1-3	i-X	⊙	⊙	⊙								
53	1-3	i-X	⊙	⊙	⊙								

CONTENTS

S

SUPER MILL

Page	Mill Dia.	Coating	HRC 45-55	HRC 55-60	HRC 60-65	HRC 65-70	Cast Iron	Titanium Alloy	Stainless Steels	Aluminum Alloy	Copper Alloy	Graphite	Superalloy, Heat-resistant Steels
54													
55	0.2-1.8	ALTiN	⊙	⊙							⊙		
56	0.2-1.8	i-X	⊙	⊙							⊙		
57	1-16	ALTiN	⊙	⊙							⊙		
58	1-16	G100	⊙	⊙							⊙		
59	1-16	i8	⊙	⊙							⊙		
60	1-16	ALTiN	⊙	⊙							⊙		
61	1-20	ALTiN	⊙	⊙							⊙		
62	1-20	i8	⊙	⊙							⊙		
63	2-6	ALTiN	⊙	⊙							⊙		
64	2-6	i8	⊙	⊙							⊙		
65	0.2-1.8	ALTiN	⊙	⊙							⊙		
66	0.2-1.8	i-X	⊙	⊙							⊙		
67	1-20	ALTiN	⊙	⊙							⊙		
68	1-20	ALTiN	⊙	⊙							⊙		
69	1-20	G100	⊙	⊙							⊙		
70	3-20	i8	⊙	⊙							⊙		
71	3-20	HELICA	⊙	⊙							⊙		
72	3-20	G-plus	⊙	⊙							⊙		
73	2-12	i8	⊙	⊙				⊙	⊙	⊙	⊙		⊙
74	6-12	ALTiN	⊙	⊙							⊙		
75	3-16	ALTiN	⊙	⊙							⊙		
76	4-12	ALTiN	⊙	⊙							⊙		
76	6-16	ALTiN	⊙	⊙							⊙		
77	4-12	ALTiN	⊙	⊙							⊙		
78	3-12	G-plus	⊙	⊙							⊙		
79	4-16	ALTiN	⊙	⊙							⊙		
80	4-16	ALTiN	⊙	⊙							⊙		
81	3-12	ALTiN	⊙	⊙							⊙		
82	1.5-12	ALTiN	⊙	⊙							⊙		
83	3-12	i8	⊙	⊙							⊙		
84	3-12	G100	⊙	⊙							⊙		
85	6-12	ALTiN	⊙	⊙							⊙		
86	6-12	i8	⊙	⊙							⊙		
87	6-12	ALTiN	⊙	⊙							⊙		
88	0.5-4	ALTiN	⊙	⊙							⊙		
89	0.5-4	i-X	⊙	⊙							⊙		
90	1-3	ALTiN	⊙	⊙							⊙		
91	1-3	i-X	⊙	⊙							⊙		
92	1-3	ALTiN	⊙	⊙							⊙		

CONTENTS

	Page	Mill Dia.	Coating	HRC 45-55	HRC 55-60	HRC 60-65	HRC 65-70	Cast Iron	Titanium Alloy	Stainless Steels	Aluminum Alloy	Copper Alloy	Graphite	Superalloy, Heat-resistant Steels
SEFV(SEFX)	93	1-3	i-X	○	○			○						
E EFFICIENCY MILLS	94													
BM	95	0.4-1.8	TiAlN	○				○						
BS	96	1-4	TiAlN	○				○						
BA	97	1-20	TiAlN	○				○						
BB	98	1-12	TiAlN	○				○						
BLS/M/L	99	1-20	TiAlN	○				○						
EM	100	0.4-1.8	TiAlN	○				○						
ES	101	1-4	TiAlN	○				○						
EA	102	1-20	TiAlN	○				○						
EB	103	1-20	TiAlN	○				○						
EC	104	3-20	TiAlN	○				○						
EP	105	3-20	TiAlN	○				○						
ED	106	3-16	TiAlN	○				○	○	○				
ELA	107	6-12	TiAlN	○				○						
ELB	108	3-16	TiAlN	○				○						
ELC	109	2-12	TiAlN	○				○						
ELD	110	2-20	TiAlN	○				○						
EH	111	6-20	TiAlN	○				○						
EHL	112	6-20	TiAlN	○				○						
EG	113	6-20	TiAlN	○				○						
EGA	114	6-20	TiAlN	○				○						
ETL	115	1-4	TiAlN	○				○						
ET	116	0.5-10	TiAlN	○				○						
ERA	118	3-12	TiAlN	○				○						
ERB	119	3-12	TiAlN	○				○						
ERC	120	6-12	TiAlN	○				○						
BF	121	1-4	TiAlN	○				○						
EFA	122	1-3	TiAlN	○				○						
I I.pro	123													
SBBIV(SBBI)	124	3-12	G-plus	○					○	○				○
SIBTR	125	6-12	G-X	○					○	○				○
SEIV(SEI)	126	3-20	G-plus	○					○	○				○
SEPS	127	3-20	HELICA	○					○	○				○
SEPIV(SEPI)	128	3-20	G-plus	○					○	○				○
SIBV(SIB)	129	3-20	G-plus	○					○	○				○
SHAIV(SHAI)	130	6-16	G-plus	○					○	○				○
SEGIV(SEGI)	131	6-20	G-plus	○					○	○				○
SIGP	131	6-12	G-X	○					○	○				○
SRIPV(SRIP)	132	3-12	G-plus	○					○	○				○

CONTENTS

	Page	Mill Dia.	Coating	HRC 45-55	HRC 55-60	HRC 60-65	HRC 65-70	Cast Iron	Titanium Alloy	Stainless Steels	Aluminum Alloy	Copper Alloy	Graphite	Superalloy, Heat-resistant Steels
SIW	133	3-20	G-plus	○					○	○				○
SIWH	134	3-12	G-X	○					○	○				○
SIRW	135	3-12	G-plus	○					○	○				○
SIRWH	136	3-12	G-X	○					○	○				○
SIW5D	137	4-20	G-X	○					○	○				○
D D MILL	138													
DBTR	139	6-12	D-X								○			
DB	140	1-12									○			
DESV	141	3-12	D-X								○			
DES	141	2-12									○			
DEA	142	1-16									○			
DEB	143	1-16									○			
DEC	144	2-20									○			
DED	145	2-20									○			
DEDP	146	2-20	DLC								○			
DEL	147	2-20									○			
DEPW	148	3-20									○			
DEPWS	149	3-20	D-X								○			
DEG	150	6-16									○			
DFR	151	6-20									○			
DRC	152	3-16									○			
DEPWR	153	3-16									○			
DBX	154	1-12	CRN								○	○		
DEDX	154	2-20	CRN								○	○		
G G.pro	155													
SGBB	156	4-12	Diamond											○
SGBF	157	4-12	Diamond											○
SGEB	158	4-12	Diamond											○
SGRD	159	4-12	Diamond											○
SGRB	160	4-12	Diamond											○
SGBS	161	1.0-4.0	Diamond											○
SGES	162	1.0-4.0	Diamond											○
SGRS	163	1.0-4.0	Diamond											○
A AX MILL	164													
APB	165	1-12												
APES	166	2-12												
APEB	167	4-12												
COM COM.pro	168													
CFPA	169	6-12	Diamond											
CFRA	170	6-12	Diamond											
For A.B.S.														
For CFPA. CFRA.														

CONTENTS		Page	Mill Dia.	Coating	HRC 45-55	HRC 55-60	HRC 60-65	HRC 65-70	Cast Iron	Titanium Alloy	Stainless Steels	Aluminum Alloy	Copper Alloy	Graphite	Superalloy, Heat-resistant Steels
EX	MAGIC SHANK	171													
	EX2CS	172	10-20												
	EX2SB	172	10-20	i8	⊙	⊙			○				○		
	EX2SRD	173	10-20	i8	⊙	⊙			○				○		
	EX2SEB	173	10-20	i8	⊙	⊙			○				○		
	EX2DPW	174	10-20							⊙					
	EX2SIW	174	10-20	G-plus						⊙	⊙				⊙
T	T.pro	175													
	EMT	176	P0.5-P2.5	G100	⊙				○	○	○	○	○	○	○
	EMTW	177	P0.5-P2.5	G100	⊙				○	○	○	○	○	○	○
	EMTH	178	P0.7-P2.5	G100	⊙				○	○	○	○	○	○	○
	EMTS	179	P0.5-P1.25	i8	⊙				○	○	○	○	○	○	○
	EMTF	180	P0.5-P1.75	G100	⊙				○	○	○	○	○	○	○
C	C.pro	181													
	ECM	182	4-12	TiAlN	⊙				○	○	○	○	○	○	○
	ECMP	183	4-12	i8	⊙				○	○	○	○	○	○	○
	ECMV	184	4-12	i8	⊙				○	○	○	○	○	○	○
	ECR	185	1-12		⊙				○	○	○	○	○	○	○
	EMCR	185	0.5-0.9		⊙				○	○	○	○	○	○	○
CD	CD	186													
	ESD	187	3-20		⊙				○	○	○	○	○	○	○
	ESD2	187	3-20		⊙				○	○	○	○	○	○	○
	ESDC	188	3-20	TiAlN	⊙				○	○	○	○	○	○	○
	ESDA	188	3-20	TiAlN	⊙				○	○	○	○	○	○	○
	ESDS	189	6-20	TiAlN	⊙				○	○	○	○	○	○	○
	ESDL	189	6-20	TiAlN	⊙				○	○	○	○	○	○	○
	CCD	190	0.5-5		⊙				○	○	○	○	○	○	○
	CCDA	190	0.5-5		⊙				○	○	○	○	○	○	○
	CD	191	2-13	TiAlN	⊙				○	○	○	○	○	○	○
	CDA	192	3-20	TiAlN	⊙				○	○	○	○	○	○	○
	CDB	193	3-20	TiAlN	⊙				○	○	○	○	○	○	○
	CDC	194	3-12	TiAlN	⊙				○	○	○	○	○	○	○
	CDAC	195	3-20	i8	⊙				○	○	○	○	○	○	○
	CDBC	196	3-20	i8	⊙				○	○	○	○	○	○	○
	CDCC	197	3-10	i8	⊙				○	○	○	○	○	○	○
CR	CR	198													
	CRA	199	2-12		⊙				○	○	○	○	○	○	○

CONTENTS		Page	Mill Dia.	Coating	Zirconia	CoCr. / Titanium	PMMA. / Wax								
DT	DEN.pro	200													
	TOBF	201	0.6-3.0	Diamond	⊙										
	TTBF	202	0.8-3.0	G-plus		⊙									
	TTFA	203	0.5-2.5	G-plus		⊙									
	TTRA	204	1.0-2.5	G-plus		⊙									
	TTRB	204	2.0-4.0	G-plus		⊙									
	TWBF	205	0.8-3.0				⊙								
	TAZ	206	0.6-2.5	Diamond	⊙										
	TAT	206	1.0-2.0	G-plus		⊙									
	TIZ3	207	0.6-2.5	Diamond	⊙										
	TIZ6	207	1.0-2.5	Diamond	⊙										
	TIT6	207	0.6-3.0	G-plus		⊙									
	TIT3	207	0.6-3.0	G-plus		⊙									
	TRZ	208	0.6-2.0	Diamond	⊙										
	TRT	208	0.6-2.0	G-plus		⊙									
	TVZS	209	1.0-2.0	Diamond	⊙										
	TVZM	209	1.0-2.0	Diamond	⊙										
CONTENTS		Page	Mill Dia.	Coating	HRC 45-55	HRC 55-60	HRC 60-65	HRC 65-70	Cast Iron	Titanium Alloy	Stainless Steels	Aluminum Alloy	Copper Alloy	Graphite	Superalloy, Heat-resistant Steels
	INCH	210													
	IEA	211	1/32-3/4	TiAlN	⊙				○	○	○	○	○	○	○
	IEB	212	1/32-3/4	TiAlN	⊙				○	○	○	○	○	○	○
	IELC	213	1/8-3/4	TiAlN	⊙				○	○	○	○	○	○	○
	IELD	214	1/16-3/4	TiAlN	⊙				○	○	○	○	○	○	○
	IBA	215	1/8-3/4	TiAlN	⊙				○	○	○	○	○	○	○
	IBB	216	3/64-3/4	TiAlN	⊙				○	○	○	○	○	○	○
	IBALF	217	1/8-3/4	TiAlN	⊙				○	○	○	○	○	○	○
	IBBLF	218	1/8-3/4	TiAlN	⊙				○	○	○	○	○	○	○
	IRB	219	1/8-1/2	TiAlN	⊙				○	○	○	○	○	○	○
	IRC	220	1/4-1/2	TiAlN	⊙				○	○	○	○	○	○	○
	ISW	221	1/16-3/4	i8	⊙	⊙			○	○	○	○	○	○	○
	ISWR	222	1/16-3/4	i8	⊙	⊙			○	○	○	○	○	○	○
	IIA	223	1/8-5/8	G-plus					○	○	○	○	○	○	○
	IAR	224	1/8-5/8	G-plus					○	○	○	○	○	○	○
	IAES	225	1/8-5/8	DLC-X					○	○	○	○	○	○	○
	IAE	226	1/8-5/8						○	○	○	○	○	○	○

TOLERANCE

Square End Mills (mm)

Flute Dia.	Dia. Tolerance
1.0	0~ -0.015
1.5	0~ -0.015
2.0	0~ -0.015
2.5	0~ -0.015
3.0	0~ -0.015
4.0	0~ -0.015
5.0	0~ -0.015
6.0	0~ -0.015
8.0	0~ -0.020
10.0	0~ -0.020
12.0	0~ -0.020
16.0	0~ -0.020
20.0	0~ -0.020

Ball Nose End Mills (mm)

Flute Radius	R Tolerance
R0.5	±0.01
R1	±0.01
R1.5	±0.01
R2	±0.01
R2.5	±0.01
R3	±0.01
R4	±0.01
R5	±0.01
R6	±0.01
R8	±0.02
R10	±0.02

Corner Radius End Mills (mm)

Flute Dia.	R Tolerance
1.0	±0.01
2.0	±0.01
3.0	±0.01
4.0	±0.01
6.0	±0.01
8.0	±0.01
10.0	±0.01
12.0	±0.01
16.0	±0.015

Shank (mm)

Shank Dia.(h6)	Shank Tolerance
∅ 3	0~ -0.008
∅ 4	0~ -0.008
∅ 6	0~ -0.008
∅ 8	0~ -0.009
∅ 10	0~ -0.009
∅ 12	0~ -0.011
∅ 16	0~ -0.011
∅ 20	0~ -0.013

RECOMMENDED CUTTING INSTRUCTIONS

- In order to enhance processing efficiency and extend life of cutters, please use the balanced chucks with high rigidity and high accuracy.
- Make overhang enough for processing. If it's necessary to extend the milling cutter, please be sure to reduce spindle speed and feed speed.
- If there's abnormal sound or vibration during processing, please adjust cutting data to prevent cutters from being influenced or broken.
- Please choose correct cutting oil to maximize efficiency.
- The result of cutting data depends on working materials, machines, work clips, programming and etc. Cutting datas are for reference. You may increase cutting data starting from 50%.

ICONS

• Flutes



• Helix Angle



• Work Material Hardness



• Coating



• Roughing Pitch



• Corner Radius




• Tip Angle



• Applications



• Statistics For Drills

































SOLID CARBIDE

Grade	V MG	Q MG	S MG	MG	G MG	T MG
ISO Classification	K05-K10	K05-K10	K10-K20	K10-K20	K10-K20	K05-K10
CO (%)	9.0	9.0	12.0	10.0	6.0	9.0
WC grain size (um)	0.2-0.4	0.2-0.4	0.5	0.6	0.8	0.2-0.4
















WORK MATERIAL


ISO	H	P	K	M	S	N
MATERIAL	Hardened steel	Low alloy steel High alloy steel, cast steel, tool steel	Cast iron	Stainless steel	High temp. alloys Titanium and Ti alloys	Aluminum alloy Copper alloys Non-metallic

HARD COATING PROPERTIES

Coating Type	Symbol Color	Nanohard-ness (GPa)	Thickness (μm)	Friction Coefficient	Max usage Temp(°C)	Coating Temp(°C)
TiaLN	  Black	30	1 - 4	0.4	800	450 ↑
ALTiN	  Black	38	1 - 4	0.6	900	450 ↑
nACoB	  Blue	45	1 - 4	0.45	1200	400 ↑
HELICA	  Copper	30	1 - 4	0.25	1000	480 ↑
CrN	  Metal-silver	18	1 - 7	0.4	700	200 - 400
DLC	  Black	20	1 - 3	0.15	400	150 - 250
G100	  Burgundy-violet	30	1 - 4	0.4	800	
i8	  Gold-brass	47	1 - 4	0.45	900	
Diamond	  Black Gray					
G-plus	  White Gold		1 - 4	0.25	1100	450
G-X	  Purple gradient		2 - 7	0.4	1000	450
i-plus	  Copper		1 - 3	0.3	1200	
i-X	  Golden gradient		2 - 7	0.55	1100	450
D-X	  Yellow-Blue gradient		0.1 - 1	0.05 - 0.1	500	250 - 650
DLC-X	  Full Colored		0.5 - 1	0.25	350	250

COATING APPLICATIONS

Coating Type	Symbol Color	Introduce coating on different materials
TiaLN	 Black	General steels; wet cutting (HRC35~45)
ALTiN	 Black	Hardened steels; dry and wet cutting (HRC45~65)
nACoB	 Blue	Hardened steels; dry cutting (HRC55~65)
HELICA	 Copper	General steels; wet cutting.
CrN	 Metal-silver	Good adhesive force; excellent for Copper Alloy.
DLC	 Black	High thermal conductivity and low coefficient of friction. Excellent for Aluminum Alloy.
G100	 Burgundy-violet	General steels; wet cutting (HRC35~45)
i8	 Gold-brass	Hardened steels; dry and wet cutting (HRC55-65)
Diamond	 Black Gray	For Graphite, Zirconium CFRP.GFRP cutting.
G-plus	 White Gold	Tough materials, Titanium, Nickel and heat-resistant alloys.
G-X	 Purple gradient	Tough materials, Titanium, Nickel and heat-resistant alloys.
i-plus	 Copper	Hardened steels; dry and wet cutting (HRC55~70)
i-X	 Golden gradient	Hardened steels (HRC55~70)
D-X	 Yellow-Blue gradient	High thermal conductivity and low coefficient of friction. Excellent for Aluminum Alloy.
DLC-X	 Full Colored	Excellent for Aluminum Alloy.

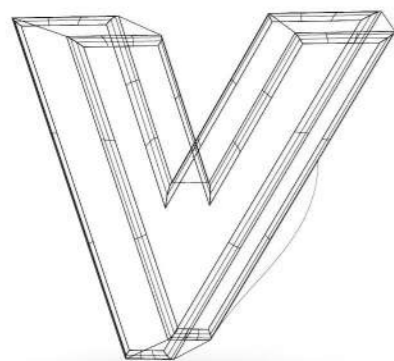

HARDENED STEELS HRC70 SERIES

V70




V70

V70B



Hardened Steels HRC70 series / 2 Flute / Ball Nose

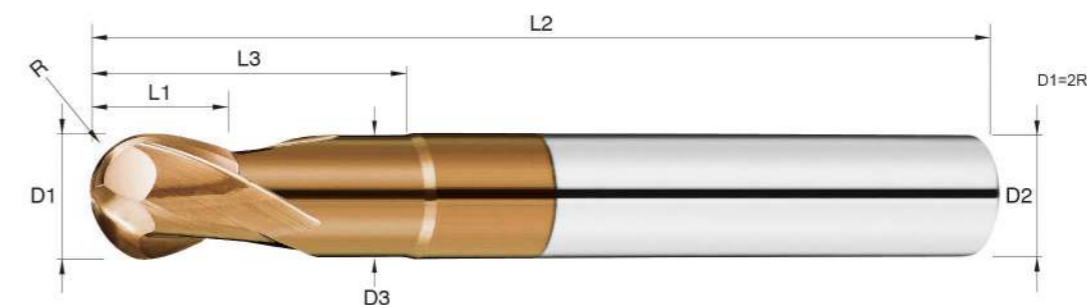

• FEATURES

- 2 Flute Ball Nose with special angle ground for workpiece up to HRC70.
- VMG Special Micro Grain Carbide. High hardness, high rigidity, and high bending resistance.
- i-plus new coating offers great heat resistance and friction resistance; suitable for dry cutting at high speed.

• ITEMS

unit: mm

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
V70B 0104	R0.5	0.95	1.0	3	50	4
V70B 0154	R0.75	1.45	1.0	3	50	4
V70B 0204	R1	1.92	2.0	5	50	4
V70B 0306	R1.5	2.90	3.0	8	50	6
V70B 0406	R2	3.88	4.0	10	50	6
V70B 0506	R2.5	4.80	5.0	13	50	6
V70B 0606	R3	5.80	6.0	15	50	6
V70B 0808	R4	7.70	8.0	20	60	8
V70B 1010	R5	9.60	10.0	25	75	10
V70B 1212	R6	11.50	12.0	30	75	12




V70

V70BTR



Hardened Steels HRC70 series / 6 Flute / Taper Barrel Type

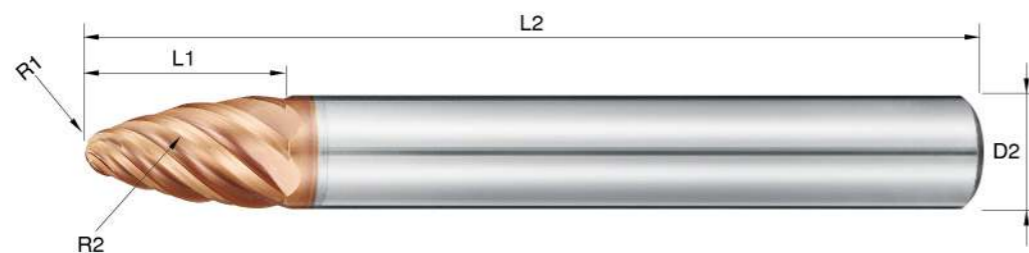


• FEATURES

- 6 Flute Barrel Type for precision milling up to HRC70.
- Large radius edge in the cutting area with multi-flute design brings higher milling efficiency.
- Compared to ball nose end mills, Barrel Type has wider ap stepover to reduce machining time.
- Lower cusp height to improve surface finish.
- i-plus new coating offers great heat resistance and friction resistance; suitable for dry cutting at high speed.


• ITEMS

Order No.	Radius R1	Radius R2	Flute Length L1	O.A.L. L2	Shank Dia D2
V70BTR 1045D06	R1.0	R45	14.0	6	75
V70BTR 1545D08	R1.5	R45	16.0	8	75
V70BTR 2040D10	R2.0	R40	17.5	10	100
V70BTR 2040D12	R2.0	R40	18.5	12	100

Standard Type



Barrel Type




V70

V70BB



Hardened Steels HRC70 series / 4 Flute / Ball Nose

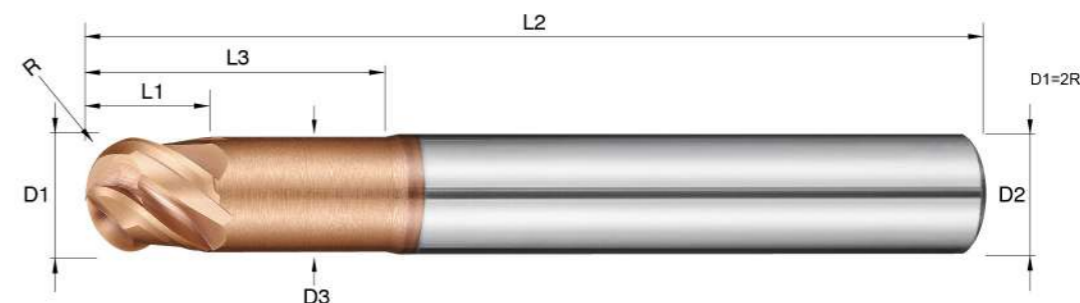

• FEATURES

- 4 Flute Ball Nose with special angle ground for workpiece up to HRC70.
- Effective length design for profile milling.
- i-plus new coating offers great heat resistance and friction resistance; suitable for dry cutting at high speed.

• ITEMS

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
V70BB 0406	R2	3.88	4	10	50	6
V70BB 0606	R3	5.80	6	15	50	6
V70BB 0808	R4	7.70	8	20	60	8
V70BB 1010	R5	9.60	10	25	75	10
V70BB 1212	R6	11.50	12	30	75	12




V70

V70BBC



Hardened Steels HRC70 series / 4 Flute / Taper Neck / Ball Nose

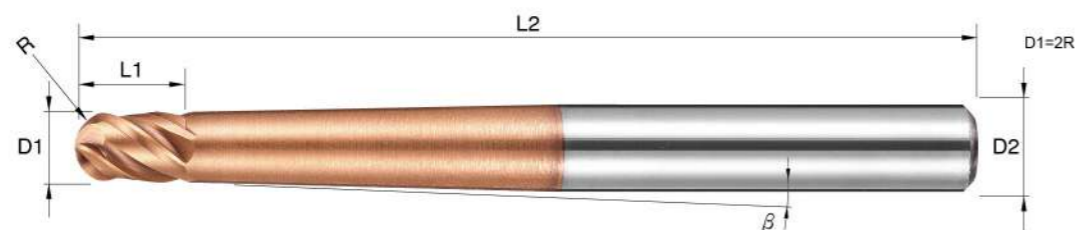

• FEATURES

- 4 Flute Ball Nose with special angle ground for workpiece up to HRC70.
- Taper Angle(β): 1.5°, 3°, 5° suitable for working on an inclined surface.
- i-plus new coating offers great heat resistance and friction resistance; suitable for dry cutting at high speed.

• ITEMS

Order No.	Corner R R	Flute Length L1	unit: mm		Taper Angle β
			O.A.L. L2	Shank Dia D2	
V70BBC 0406	R2	6	100	6	1.5°
V70BBC 0406A	R2	6	100	6	3°
V70BBC 0406B	R2	6	100	6	5°
V70BBC 0608	R3	9	100	8	1.5°
V70BBC 0608A	R3	9	100	8	3°
V70BBC 0608B	R3	9	100	8	5°
V70BBC 0810	R4	12	100	10	1.5°
V70BBC 0810A	R4	12	100	10	3°
V70BBC 0810B	R4	12	100	10	5°
V70BBC 1012	R5	15	100	12	1.5°
V70BBC 1012A	R5	15	100	12	3°
V70BBC 1012B	R5	15	100	12	5°




V70

V70EB



Hardened Steels HRC70 series / 4 Flute / Square

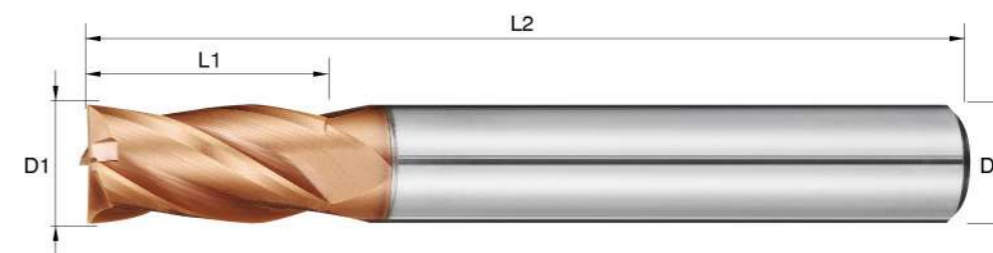

• FEATURES

- 4 Flute Square with special angle ground for workpiece up to HRC70.
- VMG Special Micro Grain Carbide. High hardness, high rigidity, and high bending resistance.
- i-plus new coating offers great heat resistance and friction resistance; suitable for dry cutting at high speed.

• ITEMS


Order No.	Diameter D1	Flute Length L1	unit: mm	
			O.A.L. L2	Shank Dia D2
V70EB 0306	3.0	8	50	6
V70EB 0406	4.0	11	50	6
V70EB 0506	5.0	13	50	6
V70EB 0606	6.0	16	50	6
V70EB 0808	8.0	20	60	8
V70EB 1010	10.0	25	75	10
V70EB 1212	12.0	30	75	12
V70EB 1616	16.0	40	100	16



V70

V70E

Hardened Steels HRC70 series / 6 Flute / Square

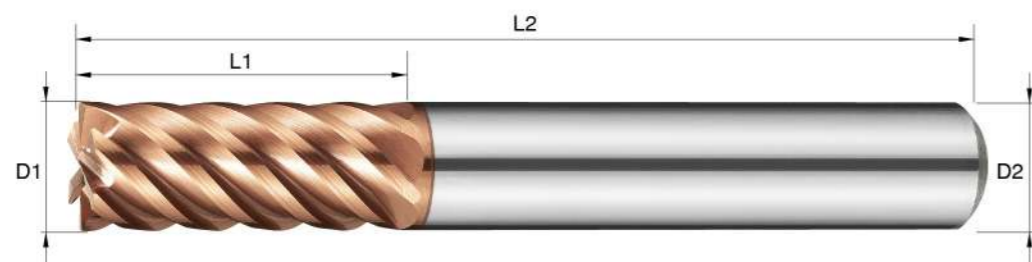

• FEATURES

- 6 Flute Square with special angle ground for workpiece up to HRC70.
- VMG Special Micro Grain Carbide. High hardness, high rigidity, and high bending resistance.
- i-plus new coating offers great heat resistance and friction resistance; suitable for dry cutting at high speed.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
V70E 0606	6.0	16	50	6
V70E 0808	8.0	20	60	8
V70E 1010	10.0	25	75	10
V70E 1212	12.0	30	75	12
V70E 1616	16.0	40	100	16


unit: mm



V70

V70R

Hardened Steels HRC70 series / 4 Flute / Coener Radius

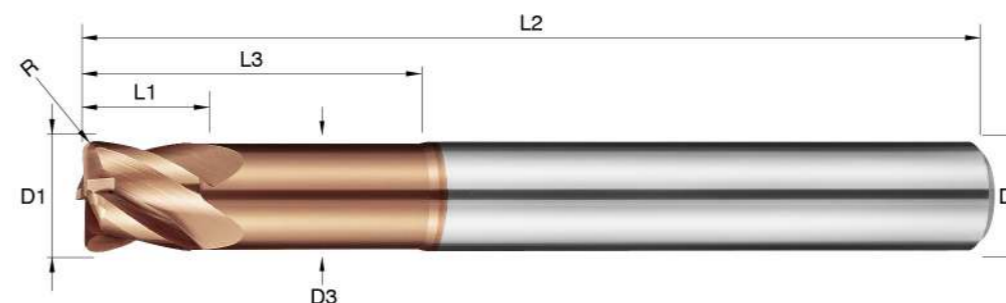

• FEATURES

- 4 Flute Corner Radius with special angle ground for workpiece up to HRC70.
- VMG Special Micro Grain Carbide. High hardness, high rigidity, and high bending resistance.
- i-plus new coating offers great heat resistance and friction resistance; suitable for dry cutting at high speed.

• ITEMS

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
V70R 0605	6.0	0.5	5.80	6	18	50	6
V70R 0610	6.0	1.0	5.80	6	18	50	6
V70R 0805	8.0	0.5	7.70	8	24	60	8
V70R 0810	8.0	1.0	7.70	8	24	60	8
V70R 1005	10.0	0.5	9.60	10	30	75	10
V70R 1010	10.0	1.0	9.60	10	30	75	10
V70R 1020	10.0	2.0	9.60	10	30	75	10
V70R 1205	12.0	0.5	11.50	12	36	75	12
V70R 1210	12.0	1.0	11.50	12	36	75	12
V70R 1220	12.0	2.0	11.50	12	36	75	12


unit: mm



V70

V70RD

Hardened Steels HRC70 series / 4 Flute / Coener Radius

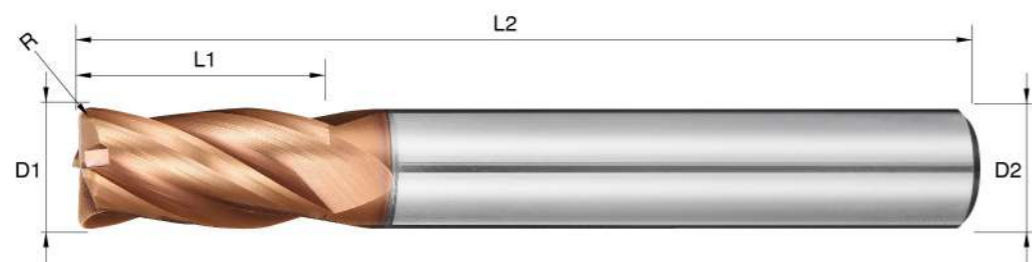

• FEATURES

- 4 Flute Corner Radius with special angle ground for workpiece up to HRC70.
- VMG Special Micro Grain Carbide. High hardness, high rigidity, and high bending resistance.
- i-plus new coating offers great heat resistance and friction resistance; suitable for dry cutting at high speed.

• ITEMS


Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
V70RD 0102	1.0	0.2	2	50	4
V70RD 01502	1.5	0.2	3	50	4
V70RD 01503	1.5	0.3	3	50	4
V70RD 0202	2.0	0.2	4	50	4
V70RD 0203	2.0	0.3	4	50	4
V70RD 0205	2.0	0.5	4	50	4
V70RD 0302	3.0	0.2	6	50	6
V70RD 0305	3.0	0.5	6	50	6
V70RD 0402	4.0	0.2	8	50	6
V70RD 0405	4.0	0.5	8	50	6
V70RD 0410	4.0	1.0	8	50	6
V70RD 0605	6.0	0.5	12	50	6
V70RD 0610	6.0	1.0	12	50	6
V70RD 0805	8.0	0.5	16	60	8
V70RD 0810	8.0	1.0	16	60	8
V70RD 1005	10.0	0.5	20	75	10
V70RD 1010	10.0	1.0	20	75	10
V70RD 1020	10.0	2.0	20	75	10
V70RD 1030	10.0	3.0	20	75	10
V70RD 1205	12.0	0.5	24	75	12
V70RD 1210	12.0	1.0	24	75	12
V70RD 1220	12.0	2.0	24	75	12
V70RD 1230	12.0	3.0	24	75	12



V70

V70BF

Hardened Steels HRC70 series / 2 Flute / Long Neck / Ball Nose

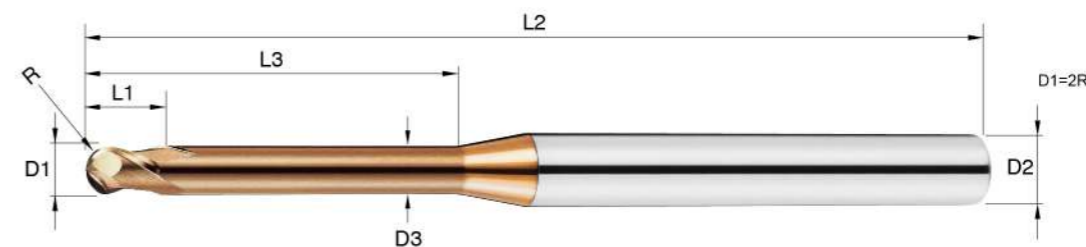

• FEATURES

- R0.25~R2 mm 2 Flute long neck Ball Nose for precision milling up to HRC70.
- Effective length 4~30 mm excellent for rib milling.
- i-plus new coating offers great heat resistance and friction resistance; suitable for dry cutting at high speed.

• ITEMS

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
V70BF 00504	R0.25	0.46	0.5	4	50	4
V70BF 00506	R0.25	0.46	0.5	6	50	4
V70BF 00604	R0.3	0.56	0.6	4	50	4
V70BF 00606	R0.3	0.56	0.6	6	50	4
V70BF 00806	R0.4	0.76	0.8	6	50	4
V70BF 00808	R0.4	0.76	0.8	8	50	4
V70BF 01006	R0.5	0.95	1.5	6	50	4
V70BF 01008	R0.5	0.95	1.5	8	50	4
V70BF 01010	R0.5	0.95	1.5	10	50	4
V70BF 01012	R0.5	0.95	1.5	12	50	4
V70BF 01208	R0.6	1.15	2	8	50	4
V70BF 01212	R0.6	1.15	2	12	50	4
V70BF 01508	R0.75	1.45	2	8	50	4
V70BF 01512	R0.75	1.45	2	12	50	4
V70BF 01516	R0.75	1.45	2	16	50	4
V70BF 01520	R0.75	1.45	2	20	50	4
V70BF 01608	R0.8	1.54	2.5	8	50	4
V70BF 01612	R0.8	1.54	2.5	12	50	4
V70BF 01616	R0.8	1.54	2.5	16	50	4
V70BF 02008	R1	1.92	3	8	50	4
V70BF 02012	R1	1.92	3	12	50	4
V70BF 02016	R1	1.92	3	16	50	4
V70BF 02020	R1	1.92	3	20	50	4
V70BF 03008	R1.5	2.90	4	8	75	6
V70BF 03010	R1.5	2.90	4	10	75	6
V70BF 03016	R1.5	2.90	4	16	75	6
V70BF 03020	R1.5	2.90	4	20	75	6
V70BF 03025	R1.5	2.90	4	25	75	6
V70BF 04010	R2	3.88	5	10	75	6
V70BF 04015	R2	3.88	5	15	75	6
V70BF 04020	R2	3.88	5	20	75	6
V70BF 04025	R2	3.88	5	25	75	6
V70BF 04030	R2	3.88	5	30	75	6



V70

V70EFB



Hardened Steels HRC70 series / 4 Flute / Long Neck / Square



• FEATURES

- 1.0~4.0 mm 4 Flute long neck Square for precision milling up to HRC70.
- Effective length 6~30 mm excellent for rib milling.
- i-plus new coating offers great heat resistance and friction resistance; suitable for dry cutting at high speed.

• ITEMS

Order No.	Diameter D1	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	unit: mm	
						Shank Dia D2	
V70EFB 01006	1.0	0.95	1.5	6	50	4	
V70EFB 01008	1.0	0.95	1.5	8	50	4	
V70EFB 01010	1.0	0.95	1.5	10	50	4	
V70EFB 01012	1.0	0.95	1.5	12	50	4	
V70EFB 01208	1.2	1.15	2	8	50	4	
V70EFB 01212	1.2	1.15	2	12	50	4	
V70EFB 01508	1.5	1.45	2	8	50	4	
V70EFB 01510	1.5	1.45	2	10	50	4	
V70EFB 01512	1.5	1.45	2	12	50	4	
V70EFB 01516	1.5	1.45	2	16	50	4	
V70EFB 01608	1.6	1.54	2.5	8	50	4	
V70EFB 01612	1.6	1.54	2.5	12	50	4	
V70EFB 01616	1.6	1.54	2.5	16	50	4	
V70EFB 02008	2.0	1.92	3	8	50	4	
V70EFB 02010	2.0	1.92	3	10	50	4	
V70EFB 02012	2.0	1.92	3	12	50	4	
V70EFB 02016	2.0	1.92	3	16	50	4	
V70EFB 02020	2.0	1.92	3	20	50	4	
V70EFB 02510	2.5	2.40	3	10	50	4	
V70EFB 02512	2.5	2.40	3	12	50	4	
V70EFB 02516	2.5	2.40	3	16	50	4	
V70EFB 02520	2.5	2.40	3	20	50	4	
V70EFB 03010	3.0	2.90	4	10	75	6	
V70EFB 03012	3.0	2.90	4	12	75	6	
V70EFB 03016	3.0	2.90	4	16	75	6	
V70EFB 03020	3.0	2.90	4	20	75	6	
V70EFB 03025	3.0	2.90	4	25	75	6	
V70EFB 04010	4.0	3.88	5	10	75	6	
V70EFB 04015	4.0	3.88	5	15	75	6	
V70EFB 04020	4.0	3.88	5	20	75	6	
V70EFB 04025	4.0	3.88	5	25	75	6	
V70EFB 04030	4.0	3.88	5	30	75	6	




V70

V70RFB



Hardened Steels HRC70 series / 4 Flute / Long Neck / Corner Radius

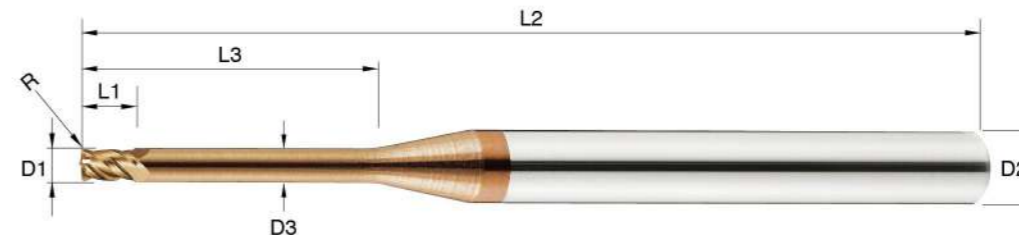


• FEATURES

- 1.0~3.0 mm 4 Flute long neck Corner Radius for precision milling up to HRC70.
- Effective length 4~20 mm excellent for rib milling.
- i-plus new coating offers great heat resistance and friction resistance; suitable for dry cutting at high speed.

• ITEMS

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	unit: mm	
							Shank Dia D2	
V70RFB 01004	1.0	0.1	0.95	1.0	4	50	4	
V70RFB 01006	1.0	0.1	0.95	1.0	6	50	4	
V70RFB 01008	1.0	0.1	0.95	1.0	8	50	4	
V70RFB 01010	1.0	0.1	0.95	1.0	10	50	4	
V70RFB 01504	1.5	0.2	1.45	1.5	4	50	4	
V70RFB 01506	1.5	0.2	1.45	1.5	6	50	4	
V70RFB 01508	1.5	0.2	1.45	1.5	8	50	4	
V70RFB 01510	1.5	0.2	1.45	1.5	10	50	4	
V70RFB 01512	1.5	0.2	1.45	1.5	12	50	4	
V70RFB 02008	2.0	0.2	1.92	2.0	8	50	4	
V70RFB 02010	2.0	0.2	1.92	2.0	10	50	4	
V70RFB 02012	2.0	0.2	1.92	2.0	12	50	4	
V70RFB 02016	2.0	0.2	1.92	2.0	16	50	4	
V70RFB 03008	3.0	0.2	2.90	3.0	8	75	6	
V70RFB 03010	3.0	0.2	2.90	3.0	10	75	6	
V70RFB 03012	3.0	0.2	2.90	3.0	12	75	6	
V70RFB 03016	3.0	0.2	2.90	3.0	16	75	6	
V70RFB 03020	3.0	0.2	2.90	3.0	20	75	6	

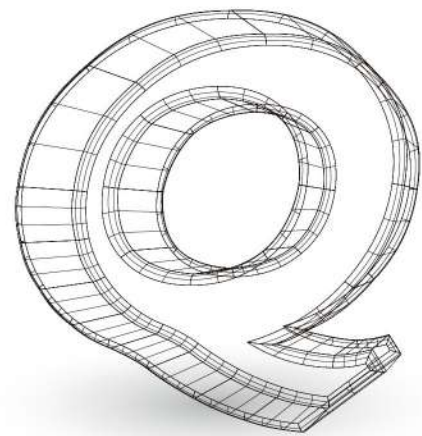

HARDENED STEELS HRC65 SERIES

MAGIC CUT



MAGIC CUT

QBMS



Hardened Steels HRC65 series / 2 Flute / Micro Diameter / Ball Nose



• FEATURES

- Micro Diameter 2 Flute Ball Nose for up to HRC65.
- R0.1~R0.9 mm suitable for general purpose precision milling.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
QBMS 0024	R0.1	0.4	50	4
QBMS 0034	R0.15	0.6	50	4
QBMS 0044	R0.2	0.8	50	4
QBMS 0054	R0.25	1.0	50	4
QBMS 0064	R0.3	1.2	50	4
QBMS 0074	R0.35	1.4	50	4
QBMS 0084	R0.4	1.6	50	4
QBMS 0094	R0.45	1.8	50	4
QBMS 0124	R0.6	2.4	50	4
QBMS 0144	R0.7	2.8	50	4
QBMS 0164	R0.8	3.2	50	4
QBMS 0184	R0.9	3.6	50	4

unit: mm

QBM




• discontinuation

QBM Product Series with Aldura coating will be discontinued after Dec. 2024. We will continue to ship QBM orders until our inventory is depleted. If you'd like to purchase QBM products, please contact your HGT sales representative while stocks last. The replacement of QBM is QBMS Product Series, which is original QBM with new coating i-X.

QB

Hardened Steels HRC65 series / 2 Flute / Ball Nose

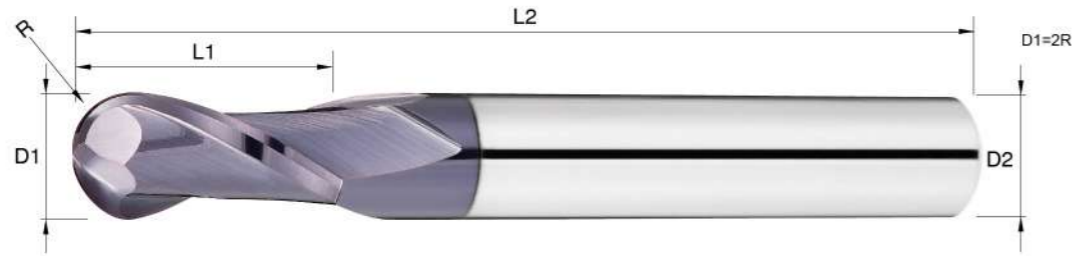

• FEATURES


- 2 Flute Ball Nose for up to HRC65.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- ALTiN coating for Hardened steel.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
QB 0104	R0.5	2	50	4
QB 0106	R0.5	2	50	6
QB 0154	R0.75	3	50	4
QB 0156	R0.75	3	50	6
QB 0204	R1	4	50	4
QB 0206	R1	4	50	6
QB 0303	R1.5	6	50	3
QB 0304	R1.5	6	50	4
QB 0306	R1.5	6	50	6
QB 0404	R2	8	50	4
QB 0406	R2	8	50	6
QB 0506	R2.5	10	50	6
QB 0606	R3	12	50	6
QB 0808	R4	16	60	8
QB 1010	R5	20	75	10
QB 1212	R6	24	75	12
QB 1616	R8	32	100	16

QBGS

Hardened Steels HRC65 series / 2 Flute / Ball Nose

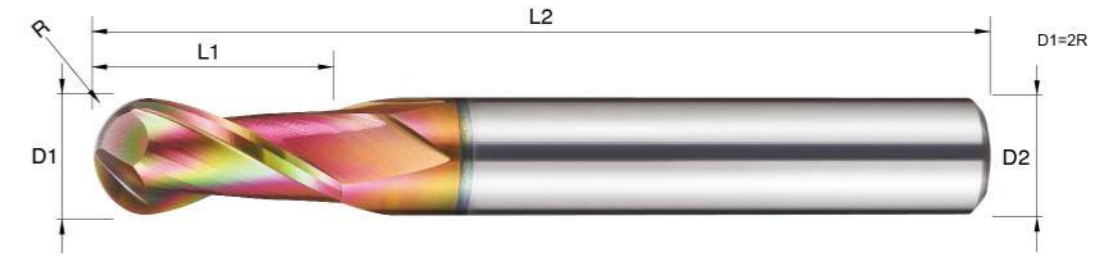

• FEATURES

- 2 Flute Ball Nose for up to HRC65.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
QBGS 0404	R2	8	50	6
QBGS 0606	R3	12	50	6
QBGS 0808	R4	16	60	8
QBGS 1010	R5	20	75	10
QBGS 1212	R6	24	75	12

QBG



• discontinuation

QBG Product Series with Aldura coating will be discontinued after Dec. 2024. We will continue to ship QBG orders until our inventory is depleted. If you'd like to purchase QBG products, please contact your HGT sales representative while stocks last. The replacement of QBG is QBGS Product Series, which is original QBG with new coating i-X.




MAGIC CUT

QBN

Hardened Steels HRC65 series / 2 Flute / Ball Nose

H P K

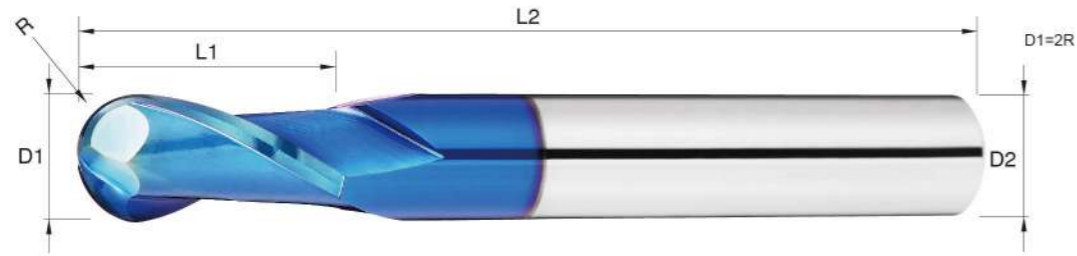

• FEATURES

- 2 Flute Ball Nose for up to HRC65.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- Heat-resistant nAcoB Coating, excellent for dry machining; not recommended for working wet.

• ITEMS

unit: mm

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
QBN 0104	R0.5	2	50	4
QBN 0106	R0.5	2	50	6
QBN 0154	R0.75	3	50	4
QBN 0156	R0.75	3	50	6
QBN 0204	R1	4	50	4
QBN 0206	R1	4	50	6
QBN 0303	R1.5	6	50	3
QBN 0304	R1.5	6	50	4
QBN 0306	R1.5	6	50	6
QBN 0404	R2	8	50	4
QBN 0406	R2	8	50	6
QBN 0506	R2.5	10	50	6
QBN 0606	R3	12	50	6
QBN 0808	R4	16	60	8
QBN 1010	R5	20	75	10
QBN 1212	R6	24	75	12
QBN 1616	R8	32	100	16




MAGIC CUT

QBX

Hardened Steels HRC65 series / 2 Flute / Ball Nose

H P K

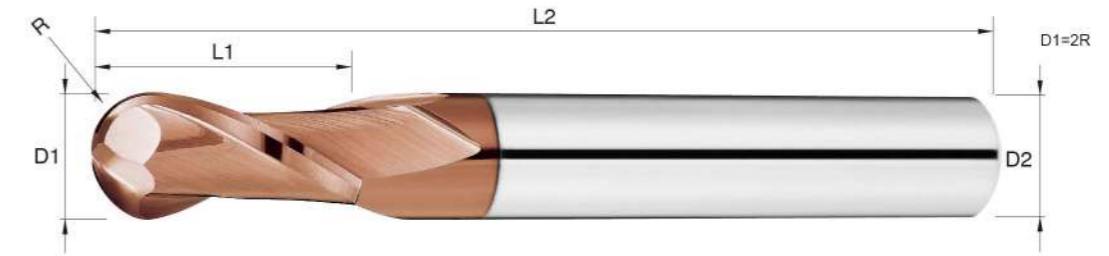

• FEATURES

- 2 Flute Ball Nose for up to HRC65.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

unit: mm

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
QBX 0104	R0.5	2	50	4
QBX 0106	R0.5	2	50	6
QBX 0154	R0.75	3	50	4
QBX 0156	R0.75	3	50	6
QBX 0204	R1	4	50	4
QBX 0206	R1	4	50	6
QBX 0303	R1.5	6	50	3
QBX 0304	R1.5	6	50	4
QBX 0306	R1.5	6	50	6
QBX 0404	R2	8	50	4
QBX 0406	R2	8	50	6
QBX 0506	R2.5	10	50	6
QBX 0606	R3	12	50	6
QBX 0808	R4	16	60	8
QBX 1010	R5	20	75	10
QBX 1212	R6	24	75	12
QBX 1616	R8	32	100	16




MAGIC CUT

QBHN

Hardened Steels HRC65 series / 2 Flute / Ball Nose

H P K

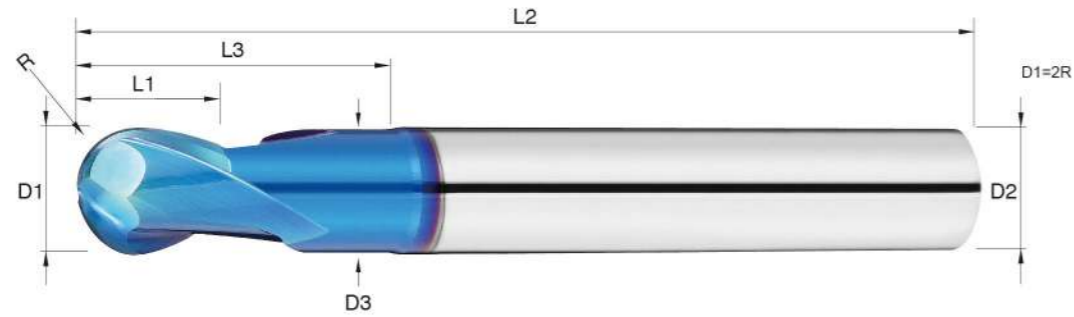

• FEATURES

- 2 Flute Ball Nose for up to HRC65.
- With Effective length design for profile milling.
- Heat-resistant nAcoB Coating, excellent for dry machining; not recommended for working wet.

• ITEMS

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
QBHN 0104	R0.5	0.95	1	3	50	4
QBHN 0154	R0.75	1.45	1	3	50	4
QBHN 0204	R1	1.92	2	5	50	4
QBHN 0306	R1.5	2.90	3	8	50	6
QBHN 0406	R2	3.88	4	10	50	6
QBHN 0506	R2.5	4.80	5	13	50	6
QBHN 0606	R3	5.80	6	15	50	6
QBHN 0808	R4	7.70	8	20	60	8
QBHN 1010	R5	9.60	10	25	75	10
QBHN 1212	R6	11.50	12	30	75	12

unit: mm




MAGIC CUT

QBHX

Hardened Steels HRC65 series / 2 Flute / Ball Nose

H P K

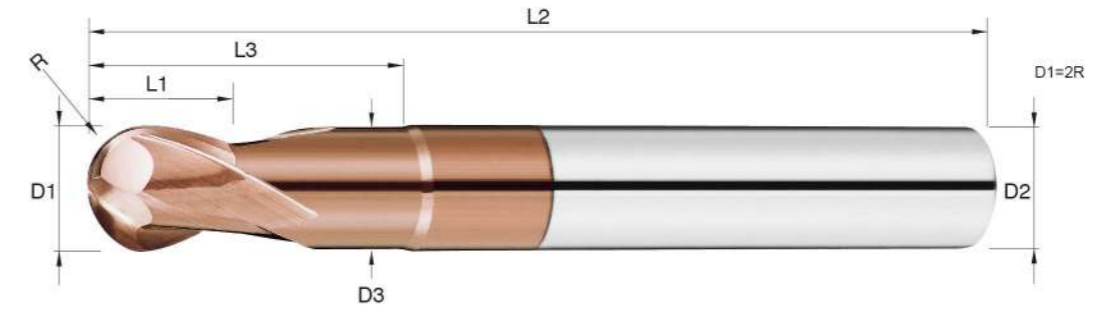

• FEATURES

- 2 Flute Ball Nose for up to HRC65.
- With Effective length design for profile milling.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
QBHX 0104	R0.5	0.95	1	3	50	4
QBHX 0154	R0.75	1.45	1	3	50	4
QBHX 0204	R1	1.92	2	5	50	4
QBHX 0306	R1.5	2.90	3	8	50	6
QBHX 0406	R2	3.88	4	10	50	6
QBHX 0506	R2.5	4.80	5	13	50	6
QBHX 0606	R3	5.80	6	15	50	6
QBHX 0808	R4	7.70	8	20	60	8
QBHX 1010	R5	9.60	10	25	75	10
QBHX 1212	R6	11.50	12	30	75	12


unit: mm



MAGIC CUT

QBLS.M.L

Hardened Steels HRC65 series / 2 Flute / Long Shank / Ball Nose

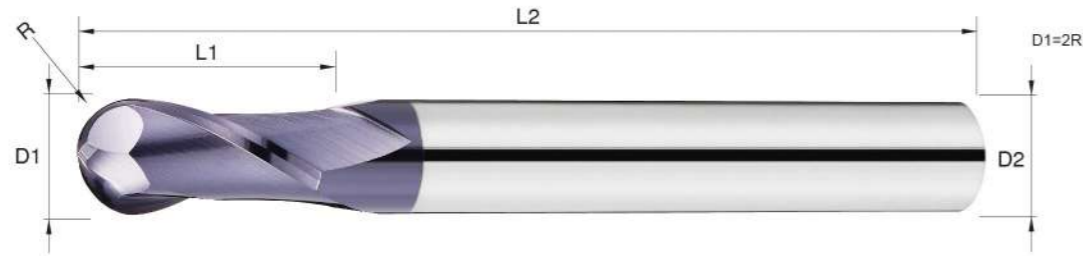

• FEATURES

- Long Shank 2 Flute Ball Nose for up to HRC65.
- Extended overall length for greater depth of cut.
- ALTiN coating for Hardened steel.

• ITEMS

unit: mm


Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
QBLS 0206	R1	4	75	6
QBLS 0306	R1.5	6	75	6
QBLS 0406	R2	8	75	6
QBLS 0506	R2.5	10	75	6
QBLS 0606	R3	12	75	6
QBLS 0808	R4	16	75	8
QBLM 0606	R3	12	100	6
QBLM 0808	R4	16	100	8
QBLM 1010	R5	20	100	10
QBLM 1212	R6	24	100	12
QBLL 1010	R5	20	150	10
QBLL 1212	R6	24	150	12
QBLL 1616	R8	32	150	16
QBLL 2020	R10	40	150	20



MAGIC CUT

QBLSX.MX.LX

Hardened Steels HRC65 series / 2 Flute / Long Shank / Ball Nose

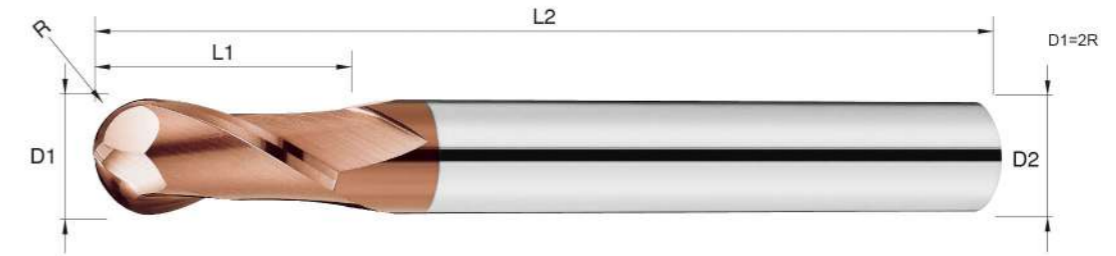

• FEATURES

- Long Shank 2 Flute Ball Nose for up to HRC65.
- Extended overall length for greater depth of cut.
- i8 Coating: High temperature resistance and low wear.


• ITEMS

unit: mm

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
QBLSX 0206	R1	4	75	6
QBLSX 0306	R1.5	6	75	6
QBLSX 0406	R2	8	75	6
QBLSX 0506	R2.5	10	75	6
QBLSX 0606	R3	12	75	6
QBLSX 0808	R4	16	75	8
QBLMX 0606	R3	12	100	6
QBLMX 0808	R4	16	100	8
QBLMX 1010	R5	20	100	10
QBLMX 1212	R6	24	100	12
QBLLX 1010	R5	20	150	10
QBLLX 1212	R6	24	150	12
QBLLX 1616	R8	32	150	16
QBLLX 2020	R10	40	150	20

QBP

Hardened Steels HRC65 series / 2 Flute / Power Ball Nose

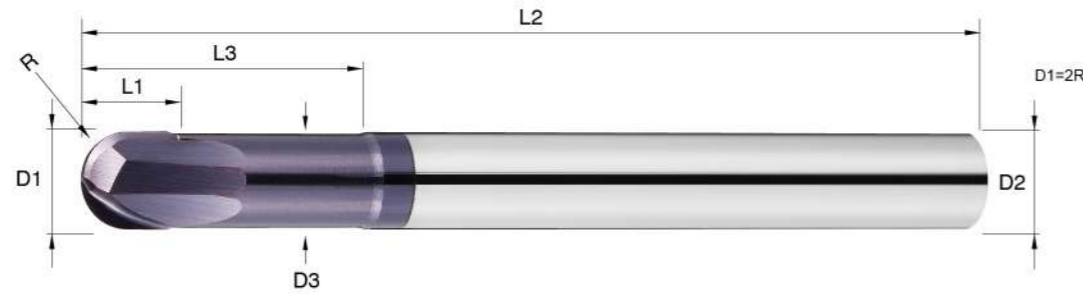

• FEATURES


- Power 2 Flute Ball Nose for up to HRC65.
- Helix Angle 5° for heavy duty cutting and brings better chip removal.
- With Effective length design for profile milling.

• ITEMS

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
QBP 0104	R0.5	0.95	1	3	50	4
QBP 0154	R0.75	1.45	2	5	50	4
QBP 0206	R1	1.92	3	6	50	6
QBP 0306	R1.5	2.90	4	8	50	6
QBP 0306A	R1.5	2.90	4	8	75	6
QBP 0406	R2	3.88	5	10	50	6
QBP 0406A	R2	3.88	5	10	75	6
QBP 0606	R3	5.80	6	12	50	6
QBP 0606A	R3	5.80	6	16	75	6
QBP 0808	R4	7.70	8	16	60	8
QBP 0808A	R4	7.70	8	25	100	8
QBP 1010	R5	9.60	10	20	75	10
QBP 1010A	R5	9.60	10	30	100	10
QBP 1212	R6	11.50	12	25	75	12
QBP 1212A	R6	11.50	12	35	100	12

QEMS

Hardened Steels HRC65 series / 2 Flute / Micro Diameter / Square

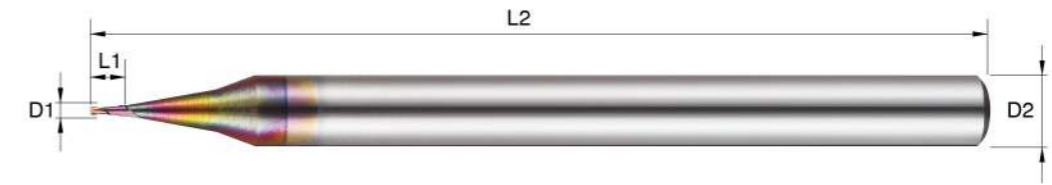

• FEATURES

- Micro Diameter 2 Flute Square for up to HRC65.
- Dia 0.2~1.8 mm suitable for general purpose precision milling.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
QEMS 0024	0.2	0.4	50	4
QEMS 0034	0.3	0.6	50	4
QEMS 0044	0.4	0.8	50	4
QEMS 0054	0.5	1.0	50	4
QEMS 0064	0.6	1.2	50	4
QEMS 0074	0.7	1.4	50	4
QEMS 0084	0.8	1.6	50	4
QEMS 0094	0.9	1.8	50	4
QEMS 0124	1.2	3.0	50	4
QEMS 0144	1.4	3.0	50	4
QEMS 0164	1.6	4.0	50	4
QEMS 0184	1.8	5.0	50	4

QEM



• discontinuation


QEM Product Series with Aldura coating will be discontinued after Dec. 2024. We will continue to ship QEM orders until our inventory is depleted. If you'd like to purchase QEM products, please contact your HGT sales representative while stocks last. The replacement of QEM is QEMS Product Series, which is original QEM with new coating i-X.



MAGIC CUT

QEB

Hardened Steels HRC65 series / 4 Flute / Square

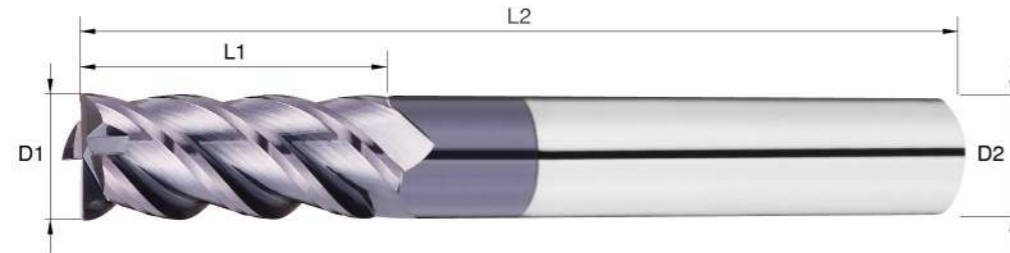

• FEATURES

- 4 Flute Square for HRC65.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- ALTiN coating for Hardened steel.

• ITEMS


Order No.	Diameter D1	Flute Length L1	O.A.L. L2	unit: mm
				Shank Dia D2
QEB 0104	1.0	3	50	4
QEB 0154	1.5	4	50	4
QEB 0204	2.0	6	50	4
QEB 0303	3.0	8	50	3
QEB 0304	3.0	8	50	4
QEB 0404	4.0	11	50	4
QEB 0506	5.0	13	50	6
QEB 0606	6.0	16	50	6
QEB 0808	8.0	20	60	8
QEB 1010	10.0	25	75	10
QEB 1212	12.0	30	75	12
QEB 1616	16.0	40	100	16
QEB 2020	20.0	45	100	20



MAGIC CUT

QEBGS

Hardened Steels HRC65 series / 4 Flute / Square

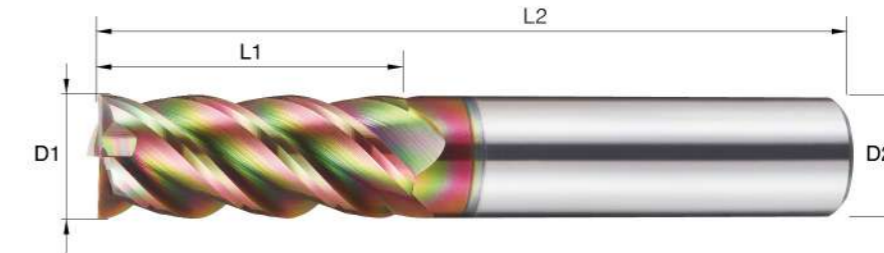

• FEATURES

- 4 Flute Square for HRC65.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	unit: mm
				Shank Dia D2
QEBGS 0404	4.0	11	50	4
QEBGS 0606	6.0	16	50	6
QEBGS 0808	8.0	20	60	8
QEBGS 1010	10.0	25	75	10
QEBGS 1212	12.0	30	75	12

QEBG



• discontinuation

QEBG Product Series with Aldura coating will be discontinued after Dec. 2024. We will continue to ship QEBG orders until our inventory is depleted. If you'd like to purchase QEBG products, please contact your HGT sales representative while stocks last. The replacement of QEBG is QEBGS Product Series, which is original QEBG with new coating i-X.




MAGIC CUT

QEBN

Hardened Steels HRC65 series / 4 Flute / Square

H P K

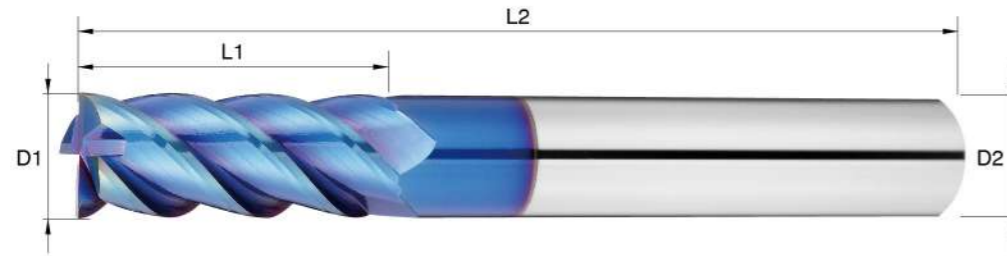

• FEATURES

- 4 Flute Square for HRC65.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- Heat-resistant nAcoB Coating, excellent for dry machining; not recommended for working wet.

• ITEMS

Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
QEBN 0104	1.0	3	50	4
QEBN 0154	1.5	4	50	4
QEBN 0204	2.0	6	50	4
QEBN 0303	3.0	8	50	3
QEBN 0304	3.0	8	50	4
QEBN 0404	4.0	11	50	4
QEBN 0506	5.0	13	50	6
QEBN 0606	6.0	16	50	6
QEBN 0808	8.0	20	60	8
QEBN 1010	10.0	25	75	10
QEBN 1212	12.0	30	75	12
QEBN 1616	16.0	40	100	16
QEBN 2020	20.0	45	100	20




MAGIC CUT

QEX

Hardened Steels HRC65 series / 4 Flute / Square

H P K

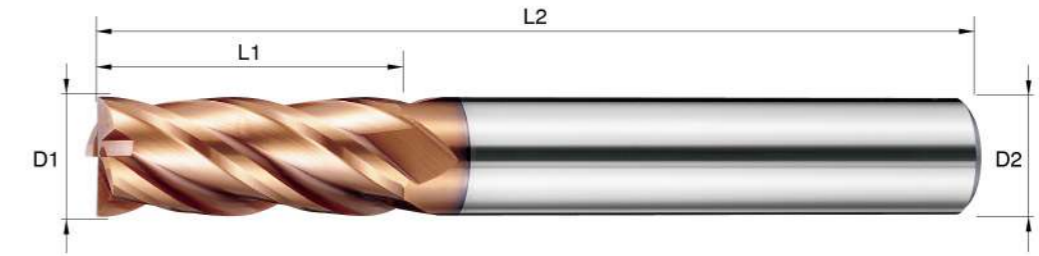

• FEATURES

- 4 Flute Square for HRC65.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- i8 Coating: High temperature resistance and low wear.

• ITEMS


Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
QEX 0304	3.0	8	50	4
QEX 0404	4.0	11	50	4
QEX 0506	5.0	13	50	6
QEX 0606	6.0	16	50	6
QEX 0808	8.0	20	60	8
QEX 1010	10.0	25	75	10
QEX 1212	12.0	30	75	12
QEX 1616	16.0	40	100	16
QEX 2020	20.0	45	100	20



MAGIC CUT

QELB

Hardened Steels HRC65 series / 4 Flute / Long Shank / Square

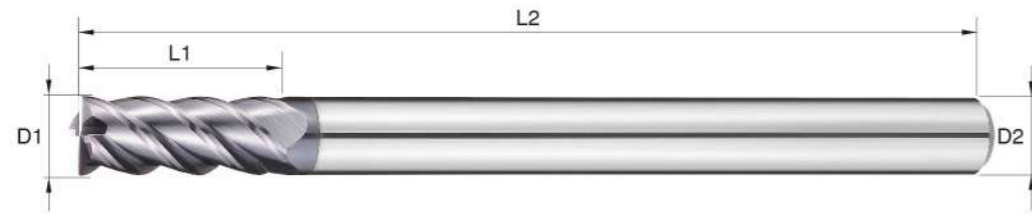

• FEATURES

- 4 Flute Long Shank Square for up to HRC65.
- Extended overall length for greater depth of cut.
- ALTiN coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
QELB 0606	6.0	15	75	6
QELB 0606A	6.0	15	100	6
QELB 0808	8.0	20	100	8
QELB 1010	10.0	25	100	10
QELB 1212	12.0	30	100	12


unit: mm



MAGIC CUT

QRD

Hardened Steels HRC65 series / 4 Flute / Corner Radius

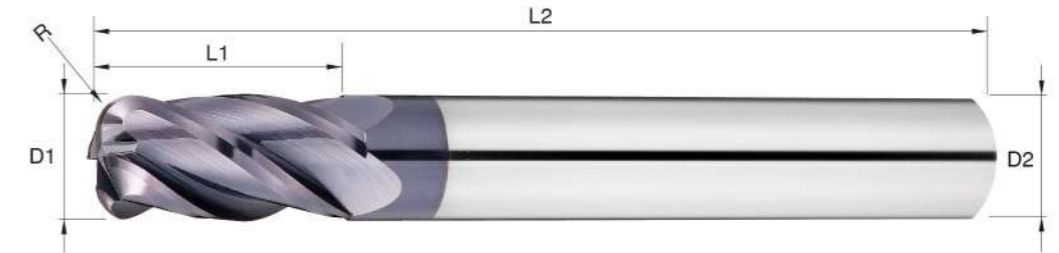

• FEATURES

- 4 Flute Corner Radius for HRC65
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- ALTiN coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
QRD 0102	1.0	0.2	2	50	4
QRD 01502	1.5	0.2	3	50	4
QRD 01503	1.5	0.3	3	50	4
QRD 0202	2.0	0.2	4	50	4
QRD 0203	2.0	0.3	4	50	4
QRD 0205	2.0	0.5	4	50	4
QRD 0302	3.0	0.2	6	50	3
QRD 0305	3.0	0.5	6	50	3
QRD 0402	4.0	0.2	8	50	4
QRD 0405	4.0	0.5	8	50	4
QRD 0410	4.0	1.0	8	50	4
QRD 0605	6.0	0.5	12	50	6
QRD 0610	6.0	1.0	12	50	6
QRD 0805	8.0	0.5	16	60	8
QRD 0810	8.0	1.0	16	60	8
QRD 1005	10.0	0.5	20	75	10
QRD 1010	10.0	1.0	20	75	10
QRD 1020	10.0	2.0	20	75	10
QRD 1030	10.0	3.0	20	75	10
QRD 1205	12.0	0.5	24	75	12
QRD 1210	12.0	1.0	24	75	12
QRD 1220	12.0	2.0	24	75	12
QRD 1230	12.0	3.0	24	75	12


unit: mm



MAGIC CUT

QRDGS

Hardened Steels HRC65 series / 4 Flute / Corner Radius

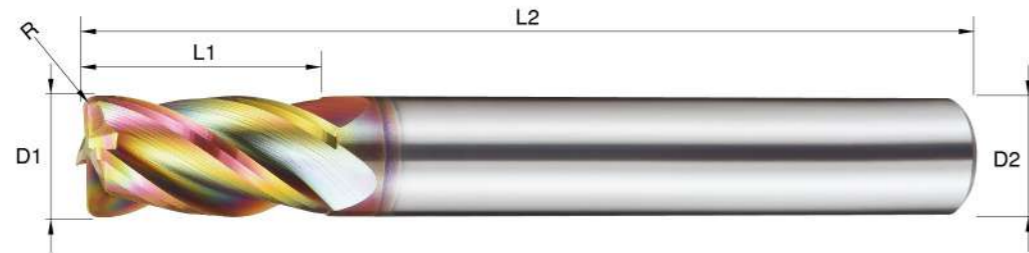

• FEATURES

- 4 Flute Corner Radius for HRC65
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
QRDGS 0405	4.0	0.5	8	50	4
QRDGS 0605	6.0	0.5	12	50	6
QRDGS 0610	6.0	1.0	12	50	6
QRDGS 0805	8.0	0.5	16	60	8
QRDGS 0810	8.0	1.0	16	60	8
QRDGS 1005	10.0	0.5	20	75	10
QRDGS 1010	10.0	1.0	20	75	10
QRDGS 1205	12.0	0.5	24	75	12
QRDGS 1210	12.0	1.0	24	75	12


unit: mm



MAGIC CUT

QRDN

Hardened Steels HRC65 series / 4 Flute / Corner Radius

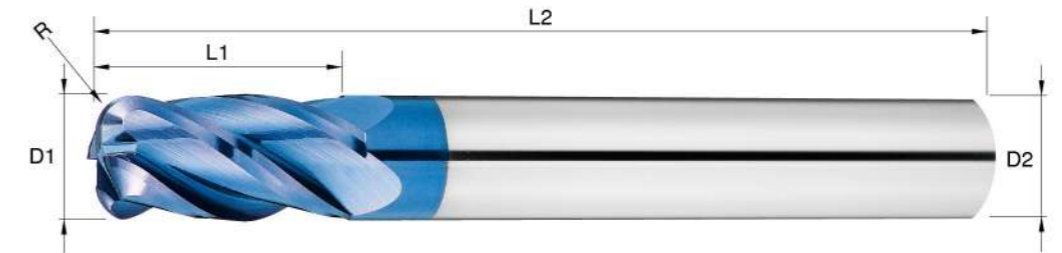

• FEATURES

- 4 Flute Corner Radius for HRC65
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- Heat-resistant nAcOB Coating, excellent for dry machining; not recommended for working wet.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
QRDN 0102	1.0	0.2	2	50	4
QRDN 01502	1.5	0.2	3	50	4
QRDN 01503	1.5	0.3	3	50	4
QRDN 0202	2.0	0.2	4	50	4
QRDN 0203	2.0	0.3	4	50	4
QRDN 0205	2.0	0.5	4	50	4
QRDN 0302	3.0	0.2	6	50	3
QRDN 0305	3.0	0.5	6	50	3
QRDN 0402	4.0	0.2	8	50	4
QRDN 0405	4.0	0.5	8	50	4
QRDN 0410	4.0	1.0	8	50	4
QRDN 0605	6.0	0.5	12	50	6
QRDN 0610	6.0	1.0	12	50	6
QRDN 0805	8.0	0.5	16	60	8
QRDN 0810	8.0	1.0	16	60	8
QRDN 1005	10.0	0.5	20	75	10
QRDN 1010	10.0	1.0	20	75	10
QRDN 1020	10.0	2.0	20	75	10
QRDN 1030	10.0	3.0	20	75	10
QRDN 1205	12.0	0.5	24	75	12
QRDN 1210	12.0	1.0	24	75	12
QRDN 1220	12.0	2.0	24	75	12
QRDN 1230	12.0	3.0	24	75	12

unit: mm

• discontinuation

QRDG Product Series with Aldura coating will be discontinued after Dec. 2024. We will continue to ship QRDG orders until our inventory is depleted. If you'd like to purchase QRDG products, please contact your HGT sales representative while stocks last. The replacement of QRDG is QRDGS Product Series, which is original QRDG with new coating i-X.

QRDG







MAGIC CUT

QRHN

Hardened Steels HRC65 series / 4 Flute / Corner Radius

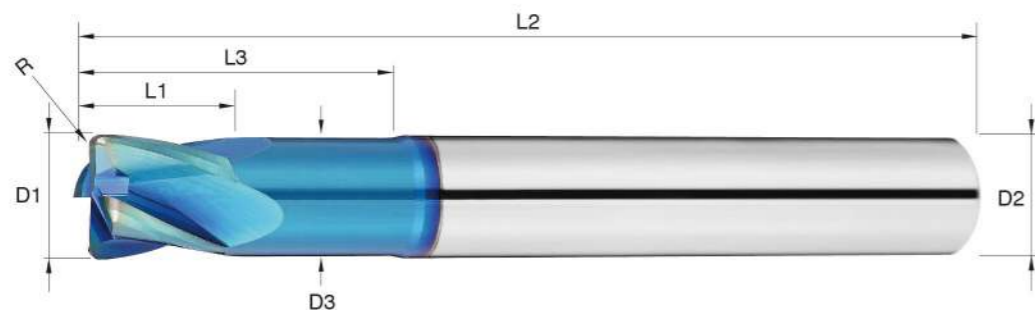

• FEATURES

- 4 Flute Corner Radius for workpiece up to HRC65.
- Helix Angle 25 ° & short flute designed for heavy duty milling.
- Heat-resistant nAcoB Coating, excellent for dry machining; not recommended for working wet.

• ITEMS


Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length		O.A.L. L2	Shank Dia D2
				L1	L3		
QRHN 0305	3.0	0.5	2.90	3	9	50	6
QRHN 0405	4.0	0.5	3.88	4	12	50	6
QRHN 0605	6.0	0.5	5.80	6	15	50	6
QRHN 0610	6.0	1.0	5.80	6	15	50	6
QRHN 0805	8.0	0.5	7.70	8	20	60	8
QRHN 0810	8.0	1.0	7.70	8	20	60	8
QRHN 1010	10.0	1.0	9.60	10	25	75	10
QRHN 1020	10.0	2.0	9.60	10	25	75	10
QRHN 1030	10.0	3.0	9.60	10	25	75	10
QRHN 1210	12.0	1.0	11.50	12	30	75	12
QRHN 1220	12.0	2.0	11.50	12	30	75	12



MAGIC CUT

QRHX

Hardened Steels HRC65 series / 4 Flute / Corner Radius

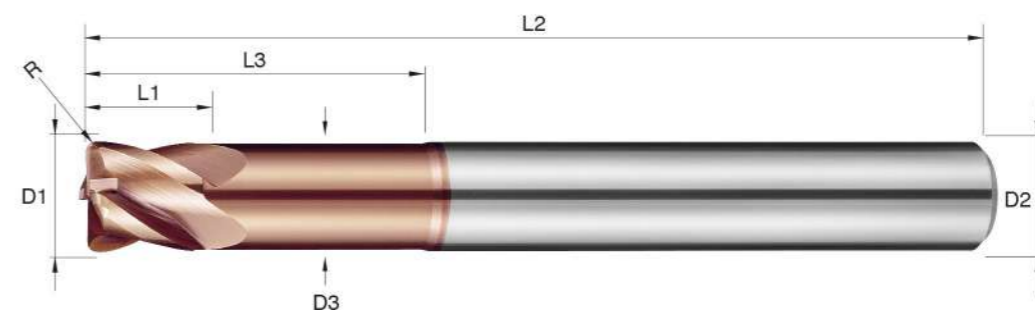

• FEATURES

- 4 Flute Corner Radius for up to HRC65.
- 1D flute length works great for high speed machining.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length		O.A.L. L2	Shank Dia D2
				L1	L3		
QRHX 0305	3.0	0.5	2.90	3	9	50	6
QRHX 0405	4.0	0.5	3.88	4	12	50	6
QRHX 0605	6.0	0.5	5.80	6	18	50	6
QRHX 0610	6.0	1.0	5.80	6	18	50	6
QRHX 0805	8.0	0.5	7.70	8	24	60	8
QRHX 0810	8.0	1.0	7.70	8	24	60	8
QRHX 1010	10.0	1.0	9.60	10	30	75	10
QRHX 1020	10.0	2.0	9.60	10	30	75	10
QRHX 1030	10.0	3.0	9.60	10	30	75	10
QRHX 1210	12.0	1.0	11.50	12	36	75	12
QRHX 1220	12.0	2.0	11.50	12	36	75	12




MAGIC CUT

QERC



Hardened Steels HRC65 series / 4 Flute / Long Shank / Corner Radius H P K

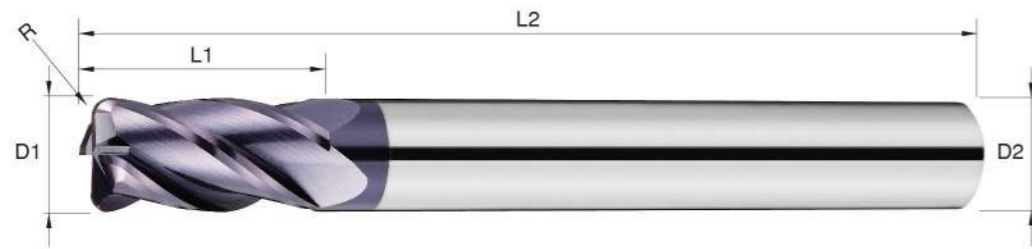

• FEATURES

- 4 Flute long shank Corner Radius for HRC65.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- ALTiN coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	unit: mm	
				O.A.L. L2	Shank Dia D2
QERC 0605	6.0	0.5	12	75	6
QERC 0605A	6.0	0.5	12	100	6
QERC 0610	6.0	1.0	12	75	6
QERC 0610A	6.0	1.0	12	100	6
QERC 0805	8.0	0.5	16	100	8
QERC 0810	8.0	1.0	16	100	8
QERC 1005	10.0	0.5	20	100	10
QERC 1010	10.0	1.0	20	100	10
QERC 1020	10.0	2.0	20	100	10
QERC 1205	12.0	0.5	24	100	12
QERC 1210	12.0	1.0	24	100	12
QERC 1220	12.0	2.0	24	100	12




MAGIC CUT

QRHLX



Hardened Steels HRC65 series / 4 Flute / Long Shank / Corner Radius H P K

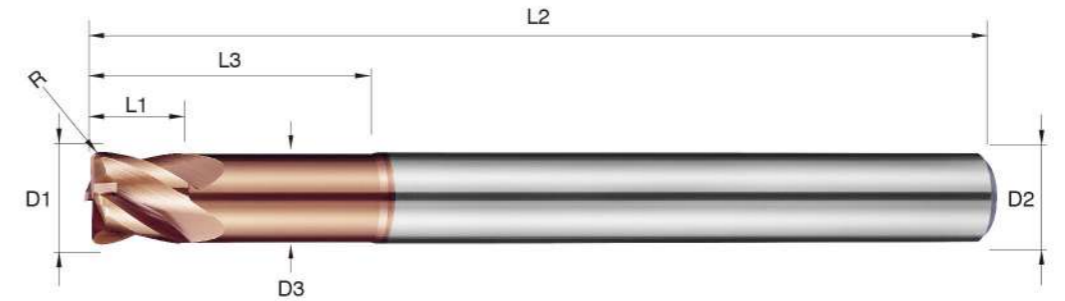

• FEATURES

- 4 Flute long shank Corner Radius for up to HRC65.
- 1D flute length for high speed machining extended overall length for greater depth of cut.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	unit: mm	
						O.A.L. L2	Shank Dia D2
QRHLX 0605	6.0	0.5	5.8	6	18	75	6
QRHLX 0610	6.0	1.0	5.8	6	18	75	6
QRHLX 0805	8.0	0.5	7.7	8	24	100	8
QRHLX 0810	8.0	1.0	7.7	8	24	100	8
QRHLX 1005	10.0	0.5	9.6	10	30	100	10
QRHLX 1010	10.0	1.0	9.6	10	30	100	10
QRHLX 1020	10.0	2.0	9.6	10	30	100	10
QRHLX 1205	12.0	0.5	11.5	12	36	100	12
QRHLX 1210	12.0	1.0	11.5	12	36	100	12
QRHLX 1220	12.0	2.0	11.5	12	36	100	12




MAGIC CUT

QBF



Hardened Steels HRC65 series / 2 Flute / Long Neck / Ball Nose

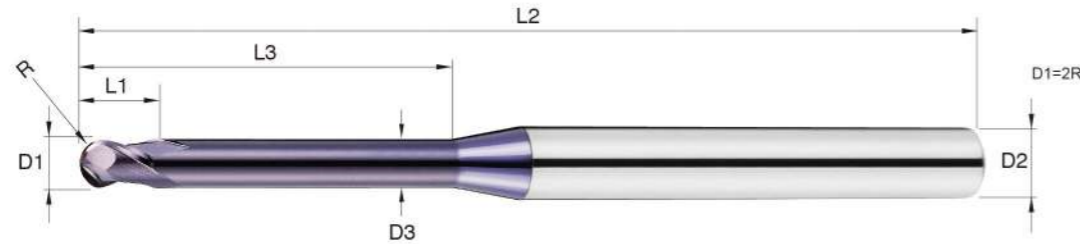

• FEATURES

- R0.25~R2 mm 2 Flute long neck Ball Nose for precision milling up to HRC65.
- Effective length 4~30 mm excellent for rib milling.
- ALTiN coating for Hardened steel.

• ITEMS

Order No.	Radius	Neck Dia	Flute Length	Effective Length	O.A.L.	Shank Dia
	R	D3	L1	L3	L2	D2
QBF 00504	R0.25	0.46	0.5	4	50	4
QBF 00506	R0.25	0.46	0.5	6	50	4
QBF 00604	R0.3	0.56	0.6	4	50	4
QBF 00606	R0.3	0.56	0.6	6	50	4
QBF 00806	R0.4	0.76	0.8	6	50	4
QBF 00808	R0.4	0.76	0.8	8	50	4
QBF 01006	R0.5	0.95	1.5	6	50	4
QBF 01008	R0.5	0.95	1.5	8	50	4
QBF 01010	R0.5	0.95	1.5	10	50	4
QBF 01012	R0.5	0.95	1.5	12	50	4
QBF 01208	R0.6	1.15	2.0	8	50	4
QBF 01212	R0.6	1.15	2.0	12	50	4
QBF 01508	R0.75	1.45	2.0	8	50	4
QBF 01512	R0.75	1.45	2.0	12	50	4
QBF 01516	R0.75	1.45	2.0	16	50	4
QBF 01520	R0.75	1.45	2.0	20	50	4
QBF 01608	R0.8	1.54	2.5	8	50	4
QBF 01612	R0.8	1.54	2.5	12	50	4
QBF 01616	R0.8	1.54	2.5	16	50	4
QBF 02008	R1	1.92	3.0	8	50	4
QBF 02012	R1	1.92	3.0	12	50	4
QBF 02016	R1	1.92	3.0	16	50	4
QBF 02020	R1	1.92	3.0	20	50	4
QBF 03008	R1.5	2.90	4.0	8	50	6
QBF 03010	R1.5	2.90	4.0	10	50	6
QBF 03016	R1.5	2.90	4.0	16	50	6
QBF 03020	R1.5	2.90	4.0	20	75	6
QBF 03025	R1.5	2.90	4.0	25	75	6
QBF 04010	R2	3.88	5.0	10	75	6
QBF 04015	R2	3.88	5.0	15	75	6
QBF 04020	R2	3.88	5.0	20	75	6
QBF 04025	R2	3.88	5.0	25	75	6
QBF 04030	R2	3.88	5.0	30	75	6



MAGIC CUT

QEFAS



Hardened Steels HRC65 series / 2 Flute / Long Shank / Square



• FEATURES

- Long neck 2 flute Square for HRC65.
- Dia 0.5~3.0 mm with effective length 4~25 mm excellent for rib milling.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS

Order No.	Diameter	Neck Dia	Flute Length	Effective Length	O.A.L.	Shank Dia
	D1	D3	L1	L3	L2	D2
QEFAS 00504	0.5	0.46	1.0	4	50	4
QEFAS 00506	0.5	0.46	1.0	6	50	4
QEFAS 00604	0.6	0.56	1.2	4	50	4
QEFAS 00606	0.6	0.56	1.2	6	50	4
QEFAS 00804	0.8	0.76	1.2	4	50	4
QEFAS 00806	0.8	0.76	1.2	6	50	4
QEFAS 00808	0.8	0.76	1.2	8	50	4
QEFAS 01006	1.0	0.95	1.5	6	50	4
QEFAS 01008	1.0	0.95	1.5	8	50	4
QEFAS 01010	1.0	0.95	1.5	10	50	4
QEFAS 01012	1.0	0.95	1.5	12	50	4
QEFAS 01208	1.2	1.15	2.0	8	50	4
QEFAS 01212	1.2	1.15	2.0	12	50	4
QEFAS 01508	1.5	1.45	2.0	8	50	4
QEFAS 01510	1.5	1.45	2.0	10	50	4
QEFAS 01512	1.5	1.45	2.0	12	50	4
QEFAS 01516	1.5	1.45	2.0	16	50	4
QEFAS 01608	1.6	1.54	2.5	8	50	4
QEFAS 01612	1.6	1.54	2.5	12	50	4
QEFAS 01616	1.6	1.54	2.5	16	50	4
QEFAS 02008	2.0	1.92	3.0	8	50	4
QEFAS 02010	2.0	1.92	3.0	10	50	4
QEFAS 02012	2.0	1.92	3.0	12	50	4
QEFAS 02016	2.0	1.92	3.0	16	50	4
QEFAS 02020	2.0	1.92	3.0	20	50	4
QEFAS 02510	2.5	2.40	3.0	10	50	4
QEFAS 02512	2.5	2.40	3.0	12	50	4
QEFAS 02516	2.5	2.40	3.0	16	50	4
QEFAS 02520	2.5	2.40	3.0	20	50	4
QEFAS 03010	3.0	2.90	4.0	10	50	6
QEFAS 03012	3.0	2.90	4.0	12	50	6
QEFAS 03016	3.0	2.90	4.0	16	50	6
QEFAS 03020	3.0	2.90	4.0	20	75	6
QEFAS 03025	3.0	2.90	4.0	25	75	6

QEFA



• discontinuation

QEFA Product Series with Aldura coating will be discontinued after Dec. 2024. We will continue to ship QEFA orders until our inventory is depleted. If you'd like to purchase QEFA products, please contact your HGT sales representative while stocks last. The replacement of QEFA is QEFAS Product Series, which is original QEFA with new coating i-X.



MAGIC CUT

QRFAS



Hardened Steels HRC65 series / 2 Flute / Long Neck / Corner Radius H P K



• FEATURES

- Long neck 2 Flute Corner Radius for up to HRC65.
- Dia 1.0~3.0 mm with effective length 4~20 mm excellent for rib milling.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	unit: mm	
							Shank Dia D2	
QRFAS 01004	1.0	0.1	0.95	1.0	4	50	4	
QRFAS 01006	1.0	0.1	0.95	1.0	6	50	4	
QRFAS 01008	1.0	0.1	0.95	1.0	8	50	4	
QRFAS 01010	1.0	0.1	0.95	1.0	10	50	4	
QRFAS 01504	1.5	0.2	1.45	1.5	4	50	4	
QRFAS 01506	1.5	0.2	1.45	1.5	6	50	4	
QRFAS 01508	1.5	0.2	1.45	1.5	8	50	4	
QRFAS 01510	1.5	0.2	1.45	1.5	10	50	4	
QRFAS 01512	1.5	0.2	1.45	1.5	12	50	4	
QRFAS 02008	2.0	0.2	1.92	2.0	8	50	4	
QRFAS 02010	2.0	0.2	1.92	2.0	10	50	4	
QRFAS 02012	2.0	0.2	1.92	2.0	12	50	4	
QRFAS 02016	2.0	0.2	1.92	2.0	16	50	4	
QRFAS 03008	3.0	0.2	2.90	3.0	8	50	6	
QRFAS 03010	3.0	0.2	2.90	3.0	10	50	6	
QRFAS 03012	3.0	0.2	2.90	3.0	12	50	6	
QRFAS 03016	3.0	0.2	2.90	3.0	16	50	6	
QRFAS 03020	3.0	0.2	2.90	3.0	20	50	6	

QRFA



• discontinuation

QRFA Product Series with Aldura coating will be discontinued after Dec. 2024. We will continue to ship QRFA orders until our inventory is depleted. If you'd like to purchase QRFA products, please contact your HGT sales representative while stocks last. The replacement of QRFA is QRFAS Product Series, which is original QRFA with new coating i-X.




MAGIC CUT

QRFBS



Hardened Steels HRC65 series / 4 Flute / Long Neck / Corner Radius H P K

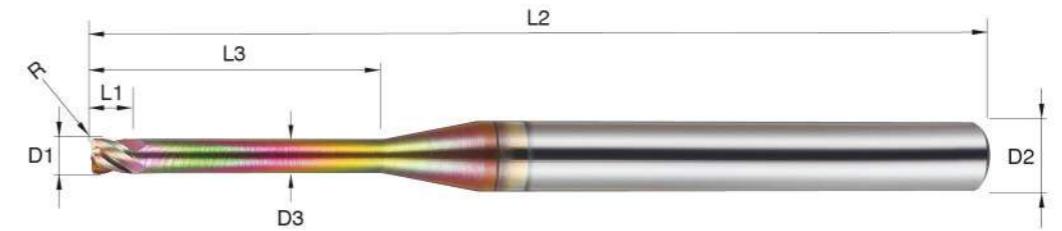

• FEATURES

- Long neck 4 Flute Corner Radius for up to HRC65.
- Dia 1.0~3.0 mm with effective length 4~20 mm excellent for rib milling.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS


Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	unit: mm	
							Shank Dia D2	
QRFBS 01004	1.0	0.1	0.95	1.0	4	50	4	
QRFBS 01006	1.0	0.1	0.95	1.0	6	50	4	
QRFBS 01008	1.0	0.1	0.95	1.0	8	50	4	
QRFBS 01010	1.0	0.1	0.95	1.0	10	50	4	
QRFBS 01504	1.5	0.2	1.45	1.5	4	50	4	
QRFBS 01506	1.5	0.2	1.45	1.5	6	50	4	
QRFBS 01508	1.5	0.2	1.45	1.5	8	50	4	
QRFBS 01510	1.5	0.2	1.45	1.5	10	50	4	
QRFBS 01512	1.5	0.2	1.45	1.5	12	50	4	
QRFBS 02008	2.0	0.2	1.92	2.0	8	50	4	
QRFBS 02010	2.0	0.2	1.92	2.0	10	50	4	
QRFBS 02012	2.0	0.2	1.92	2.0	12	50	4	
QRFBS 02016	2.0	0.2	1.92	2.0	16	50	4	
QRFBS 03008	3.0	0.2	2.90	3.0	8	50	6	
QRFBS 03010	3.0	0.2	2.90	3.0	10	50	6	
QRFBS 03012	3.0	0.2	2.90	3.0	12	50	6	
QRFBS 03016	3.0	0.2	2.90	3.0	16	50	6	
QRFBS 03020	3.0	0.2	2.90	3.0	20	50	6	

QRFB



• discontinuation

QRFB Product Series with Aldura coating will be discontinued after Dec. 2024. We will continue to ship QRFB orders until our inventory is depleted. If you'd like to purchase QRFB products, please contact your HGT sales representative while stocks last. The replacement of QRFB is QRFBS Product Series, which is original QRFB with new coating i-X.

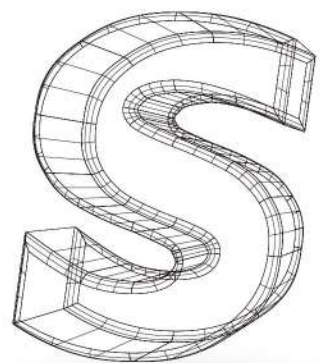

FOR HRC60 STEELS

SUPER MILL

S SUPER MILL

SBM

S 2 30° HRC 60 ALTiN Finishing Semi-Finishing Cutting Data P.232

For HRC60 Steels / 2 Flute / Micro Diameter / Ball Nose

H P K



• FEATURES

- Micro Diameter 2 Flute Ball Nose for up to HRC60.
- R0.1~R1 mm suitable for general purpose precision milling.
- ALTiN Coating for Hardened steel.

• ITEMS

unit: mm

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
SBM 0024	R0.1	0.4	50	4
SBM 0034	R0.15	0.6	50	4
SBM 0044	R0.2	0.8	50	4
SBM 0054	R0.25	1.0	50	4
SBM 0064	R0.3	1.2	50	4
SBM 0074	R0.35	1.4	50	4
SBM 0084	R0.4	1.6	50	4
SBM 0094	R0.45	1.8	50	4
SBM 0124	R0.6	2.4	50	4
SBM 0144	R0.7	2.8	50	4
SBM 0164	R0.8	3.2	50	4
SBM 0184	R0.9	3.6	50	4

S SUPER MILL

SBMV

For HRC60 Steels / 2 Flute / Micro Diameter / Ball Nose

S MG 2 30° HRC 60 i-X Finishing Cutting Data P.232

H P K



• FEATURES

- Micro Diameter 2 Flute Ball Nose for up to HRC60.
- R0.1~R1 mm suitable for general purpose precision milling.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
SBMV 0024	R0.1	0.4	50	4
SBMV 0034	R0.15	0.6	50	4
SBMV 0044	R0.2	0.8	50	4
SBMV 0054	R0.25	1.0	50	4
SBMV 0064	R0.3	1.2	50	4
SBMV 0074	R0.35	1.4	50	4
SBMV 0084	R0.4	1.6	50	4
SBMV 0094	R0.45	1.8	50	4
SBMV 0124	R0.6	2.4	50	4
SBMV 0144	R0.7	2.8	50	4
SBMV 0164	R0.8	3.2	50	4
SBMV 0184	R0.9	3.6	50	4

unit: mm


S SUPER MILL

SB

For HRC60 Steels / 2 Flute / Ball Nose

S MG 2 30° HRC 60 ALTiN Finishing Cutting Data P.232

H P K

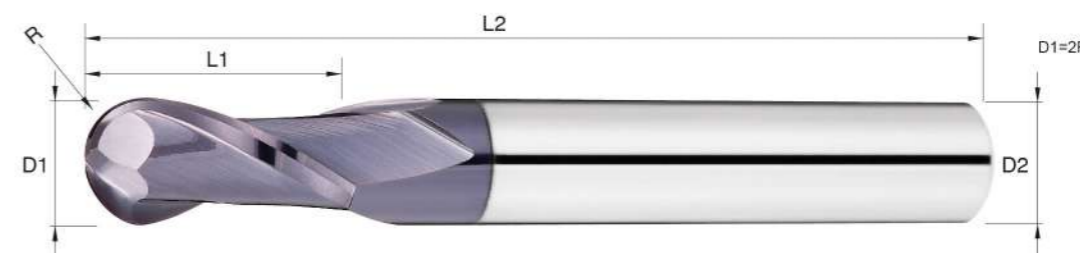

• FEATURES

- 2 Flute Ball Nose for up to HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
SB 0104	R0.5	2	50	4
SB 0106	R0.5	2	50	6
SB 0154	R0.75	3	50	4
SB 0156	R0.75	3	50	6
SB 0204	R1	4	50	4
SB 0206	R1	4	50	6
SB 0254	R1.25	5	50	4
SB 0256	R1.25	5	50	6
SB 0303	R1.5	6	50	3
SB 0304	R1.5	6	50	4
SB 0306	R1.5	6	50	6
SB 0404	R2	8	50	4
SB 0406	R2	8	50	6
SB 0505	R2.5	10	50	5
SB 0506	R2.5	10	50	6
SB 0606	R3	12	50	6
SB 0808	R4	16	60	8
SB 1010	R5	20	75	10
SB 1212	R6	24	75	12
SB 1616	R8	32	100	16

unit: mm

SBMX



• discontinuation

SBMX Product Series with i8 coating will be discontinued after Dec. 2024. We will continue to ship SBMX orders until our inventory is depleted. If you'd like to purchase SBMX products, please contact your HGT sales representative while stocks last. The replacement of SBMX is SBMV Product Series, which is original SBMX with new coating i-X.

S SUPER MILL

SBK

For HRC60 Steels / 2 Flute / Ball Nose

S 2 30° HRC 60 G100 Finishing Cutting Data P.232
MG

H P K



• FEATURES

- 2 Flute Ball Nose for up to HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- G100 Coating for General steel.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
SBK 0104	R0.5	2	50	4
SBK 0106	R0.5	2	50	6
SBK 0154	R0.75	3	50	4
SBK 0156	R0.75	3	50	6
SBK 0204	R1	4	50	4
SBK 0206	R1	4	50	6
SBK 0254	R1.25	5	50	4
SBK 0256	R1.25	5	50	6
SBK 0303	R1.5	6	50	3
SBK 0304	R1.5	6	50	4
SBK 0306	R1.5	6	50	6
SBK 0404	R2	8	50	4
SBK 0406	R2	8	50	6
SBK 0506	R2.5	10	50	6
SBK 0606	R3	12	50	6
SBK 0808	R4	16	60	8
SBK 1010	R5	20	75	10
SBK 1212	R6	24	75	12
SBK 1616	R8	32	100	16


S SUPER MILL

SBX

For HRC60 Steels / 2 Flute / Ball Nose

S 2 30° HRC 60 i8 Finishing Cutting Data P.232
MG

H P K

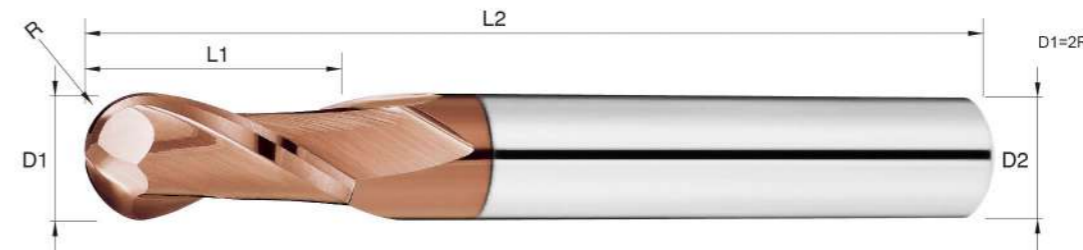

• FEATURES

- 2 Flute Ball Nose for up to HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
SBX 0104	R0.5	2	50	4
SBX 0106	R0.5	2	50	6
SBX 0154	R0.75	3	50	4
SBX 0156	R0.75	3	50	6
SBX 0204	R1	4	50	4
SBX 0206	R1	4	50	6
SBX 0254	R1.25	5	50	4
SBX 0256	R1.25	5	50	6
SBX 0303	R1.5	6	50	3
SBX 0304	R1.5	6	50	4
SBX 0306	R1.5	6	50	6
SBX 0404	R2	8	50	4
SBX 0406	R2	8	50	6
SBX 0505	R2.5	10	50	5
SBX 0506	R2.5	10	50	6
SBX 0606	R3	12	50	6
SBX 0808	R4	16	60	8
SBX 1010	R5	20	75	10
SBX 1212	R6	24	75	12
SBX 1616	R8	32	100	16


S SUPER MILL

SBB

For HRC60 Steels / 4 Flute / Ball Nose

S 4 30° HRC 60 ALTiN Finishing Cutting Data
MG 4 30° HRC 60 ALTiN Semi-Finishing P.232

H P K

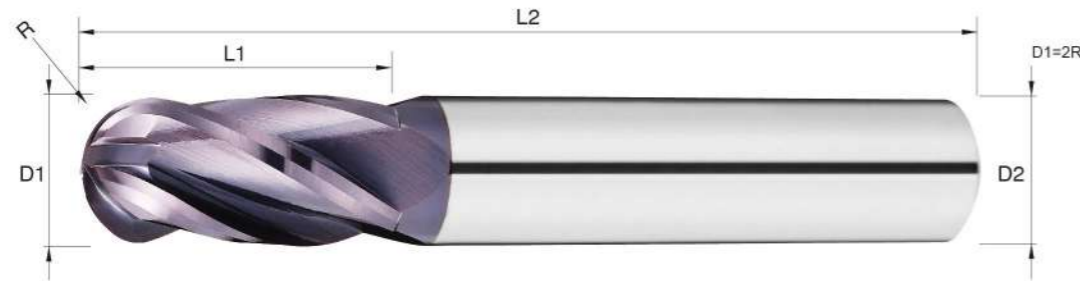

• FEATURES

- 4 Flute Ball Nose for up to HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
SBB 0104	R0.5	2	50	4
SBB 0154	R0.75	3	50	4
SBB 0204	R1	4	50	4
SBB 0254	R1.25	5	50	4
SBB 0304	R1.5	6	50	4
SBB 0404	R2	8	50	4
SBB 0506	R2.5	10	50	6
SBB 0606	R3	12	50	6
SBB 0808	R4	16	60	8
SBB 1010	R5	20	75	10
SBB 1212	R6	24	75	12
SBB 1616	R8	32	100	16

unit: mm


S SUPER MILL

SBLS.M.L

For HRC60 Steels / 2 Flute / Long Shank / Ball Nose

S 2 30° HRC 60 ALTiN Finishing Cutting Data
MG 2 30° HRC 60 ALTiN Semi-Finishing P.232

H P K

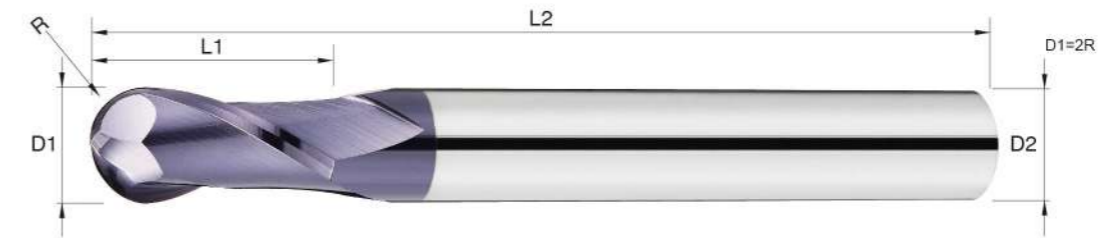

• FEATURES

- Long Shank 2 Flute Ball Nose for up to HRC60.
- Extended overall length for greater depth of cut.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
SBLS 0104	R0.5	2	75	4
SBLS 0106	R0.5	2	75	6
SBLS 0154	R0.75	3	75	4
SBLS 0156	R0.75	3	75	6
SBLS 0206	R1	4	75	6
SBLS 0256	R1.25	5	75	6
SBLS 0303	R1.5	6	75	3
SBLS 0306	R1.5	6	75	6
SBLS 0404	R2	8	75	4
SBLS 0406	R2	8	75	6
SBLS 0506	R2.5	10	75	6
SBLS 0606	R3	12	75	6
SBLS 0808	R4	16	75	8
SBLM 0206	R1	4	100	6
SBLM 0306	R1.5	6	100	6
SBLM 0406	R2	8	100	6
SBLM 0606	R3	12	100	6
SBLM 0808	R4	16	100	8
SBLM 1010	R5	20	100	10
SBLM 1212	R6	24	100	12
SBLL 0606	R3	12	150	6
SBLL 0808	R4	16	150	8
SBLL 1010	R5	20	150	10
SBLL 1212	R6	24	150	12
SBLL 1616	R8	32	150	16
SBLL 2020	R10	40	150	20

unit: mm


S SUPER MILL

SBLSX.MX.LX

S MG 2 30° HRC 60 i8 Finishing Cutting Data P.232

For HRC60 Steels / 2 Flute / Long Shank / Ball Nose

H P K

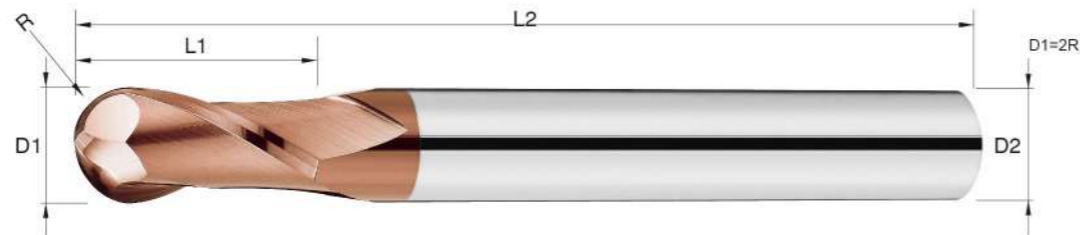

• FEATURES

- Long Shank 2 Flute Ball Nose for up to HRC60.
- Extended overall length for greater depth of cut.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2	unit: mm
SBLSX 0104	R0.5	2	75	4	
SBLSX 0106	R0.5	2	75	6	
SBLSX 0154	R0.75	3	75	4	
SBLSX 0156	R0.75	3	75	6	
SBLSX 0206	R1	4	75	6	
SBLSX 0256	R1.25	5	75	6	
SBLSX 0303	R1.5	6	75	3	
SBLSX 0306	R1.5	6	75	6	
SBLSX 0404	R2	8	75	4	
SBLSX 0406	R2	8	75	6	
SBLSX 0506	R2.5	10	75	6	
SBLSX 0606	R3	12	75	6	
SBLSX 0808	R4	16	75	8	
SBLMX 0206	R1	4	100	6	
SBLMX 0306	R1.5	6	100	6	
SBLMX 0406	R2	8	100	6	
SBLMX 0606	R3	12	100	6	
SBLMX 0808	R4	16	100	8	
SBLMX 1010	R5	20	100	10	
SBLMX 1212	R6	24	100	12	
SBLLX 0606	R3	12	150	6	
SBLLX 0808	R4	16	150	8	
SBLLX 1010	R5	20	150	10	
SBLLX 1212	R6	24	150	12	
SBLLX 1616	R8	32	150	16	
SBLLX 2020	R10	40	150	20	

S SUPER MILL

SBC

S MG 2 30° HRC 60 ALTiN Finishing Cutting Data P.233

For HRC60 Steels / 2 Flute / Taper Neck / Ball Nose

H P K



• FEATURES

- Taper Neck 2 Flute Ball Nose for up to HRC60.
- Taper Angle(β): 1.5° · 3° · 5° suitable for working on an inclined surface.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2	Taper Angle β	unit: mm
SBC 0206	R1	4	75	6	3°	
SBC 0206A	R1	4	75	6	5°	
SBC 0306	R1.5	6	100	6	1.5°	
SBC 0306A	R1.5	6	75	6	3°	
SBC 0306B	R1.5	6	75	6	5°	
SBC 0406	R2	8	100	6	1.5°	
SBC 0406A	R2	8	100	6	3°	
SBC 0406B	R2	8	75	6	5°	
SBC 0608	R3	12	100	8	1.5°	
SBC 0608A	R3	12	75	8	3°	
SBC 0608B	R3	12	100	8	5°	


S SUPER MILL

SBCX

For HRC60 Steels / 2 Flute / Taper Neck / Ball Nose

S 2 30° HRC 60 i8 Finishing Cutting Data P.233
MG

H P K

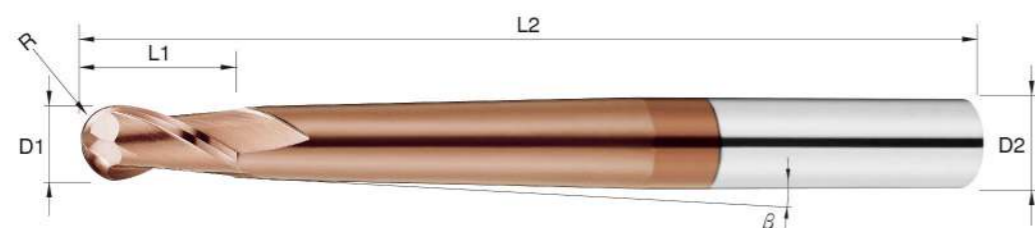

• FEATURES

- Taper Neck 2 Flute Ball Nose for up to HRC60.
- Taper Angle(β): 1.5° · 3° · 5° suitable for working on an inclined surface.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L.		Shank Dia D2	Taper Angle β
			L2			
SBCX 0206	R1	4	75		6	3°
SBCX 0206A	R1	4	75		6	5°
SBCX 0306	R1.5	6	100		6	1.5°
SBCX 0306A	R1.5	6	75		6	3°
SBCX 0306B	R1.5	6	75		6	5°
SBCX 0406	R2	8	100		6	1.5°
SBCX 0406A	R2	8	100		6	3°
SBCX 0406B	R2	8	75		6	5°
SBCX 0608	R3	12	100		8	1.5°
SBCX 0608A	R3	12	75		8	3°
SBCX 0608B	R3	12	100		8	5°

S SUPER MILL

SEM

For HRC60 Steels / 2 Flute / Micro Diameter / Square

S 2 35° HRC 60 ALTiN Finishing Cutting Data P.234
MG

H P K



• FEATURES

- Micro Diameter 2 Flute Square for up to HRC60.
- Dia 0.2~1.8 mm suitable for general purpose precision milling.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L.		Shank Dia D2
			L2		
SEM 0024	0.2	0.4	50		4
SEM 0034	0.3	0.6	50		4
SEM 0044	0.4	0.8	50		4
SEM 0054	0.5	1.0	50		4
SEM 0064	0.6	1.2	50		4
SEM 0074	0.7	1.4	50		4
SEM 0084	0.8	1.6	50		4
SEM 0094	0.9	1.8	50		4
SEM 0124	1.2	3.0	50		4
SEM 0144	1.4	3.0	50		4
SEM 0164	1.6	4.0	50		4
SEM 0184	1.8	5.0	50		4

S SUPER MILL

SEMV

For HRC60 Steels / 2 Flute / Micro Diameter / Square

S 2 35° HRC 60 i-X Finishing Semi-Finishing Cutting Data P.234
MG

H P K



• FEATURES

- Micro Diameter 2 Flute Square for up to HRC60.
- Dia 0.2~1.8 mm suitable for general purpose precision milling.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS

Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SEMV 0024	0.2	0.4	50	4
SEMV 0034	0.3	0.6	50	4
SEMV 0044	0.4	0.8	50	4
SEMV 0054	0.5	1.0	50	4
SEMV 0064	0.6	1.2	50	4
SEMV 0074	0.7	1.4	50	4
SEMV 0084	0.8	1.6	50	4
SEMV 0094	0.9	1.8	50	4
SEMV 0124	1.2	3.0	50	4
SEMV 0144	1.4	3.0	50	4
SEMV 0164	1.6	4.0	50	4
SEMV 0184	1.8	5.0	50	4


S SUPER MILL

SEA

For HRC60 Steels / 2 Flute / Square

S 2 35° HRC 60 ALTiN Finishing Semi-Finishing Cutting Data P.233
MG

H P K

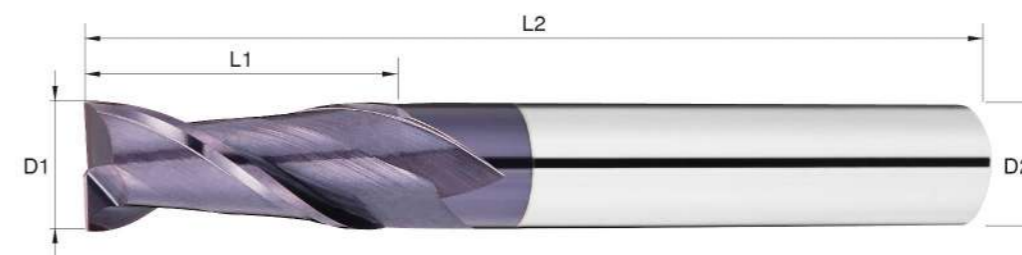

• FEATURES

- 2 Flute Square for up to HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SEA 0104	1.0	3	50	4
SEA 0154	1.5	4	50	4
SEA 0204	2.0	6	50	4
SEA 0306	3.0	8	50	6
SEA 0406	4.0	11	50	6
SEA 0506	5.0	13	50	6
SEA 0606	6.0	16	50	6
SEA 0808	8.0	20	60	8
SEA 1010	10.0	25	75	10
SEA 1212	12.0	30	75	12
SEA 1616	16.0	40	100	16
SEA 2020	20.0	45	100	20

SEM X



• discontinuation

SEM X Product Series with i8 coating will be discontinued after Dec. 2024. We will continue to ship SEM X orders until our inventory is depleted. If you'd like to purchase SEM X products, please contact your HGT sales representative while stocks last. The replacement of SEM X is SEM V Product Series, which is original SEM X with new coating i-X.


S SUPER MILL

SEB

For HRC60 Steels / 4 Flute / Square

S 4 35° HRC 60 ALTiN Finishing Cutting Data P.233
MG 4 35° HRC 60 ALTiN Finishing Cutting Data P.233

H P K

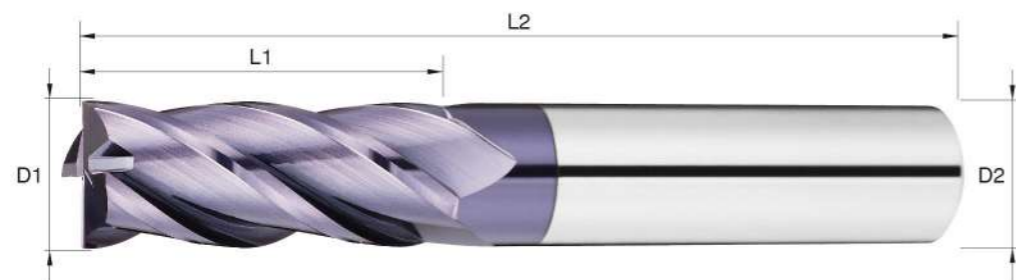

• FEATURES

- 4 Flute Square for up to HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SEB 0104	1.0	3	50	4
SEB 0106	1.0	3	50	6
SEB 0154	1.5	4	50	4
SEB 0156	1.5	4	50	6
SEB 0204	2.0	6	50	4
SEB 0206	2.0	6	50	6
SEB 0254	2.5	8	50	4
SEB 0256	2.5	8	50	6
SEB 0303	3.0	8	50	3
SEB 0304	3.0	8	50	4
SEB 0306	3.0	8	50	6
SEB 0404	4.0	11	50	4
SEB 0406	4.0	11	50	6
SEB 0505	5.0	13	50	5
SEB 0506	5.0	13	50	6
SEB 0606	6.0	16	50	6
SEB 0808	8.0	20	60	8
SEB 1010	10.0	25	75	10
SEB 1212	12.0	30	75	12
SEB 1414	14.0	35	100	14
SEB 1616	16.0	40	100	16
SEB 1818	18.0	45	100	18
SEB 2020	20.0	45	100	20


S SUPER MILL

SEK

For HRC60 Steels / 4 Flute / Square

S 4 45° HRC 60 G100 Finishing Cutting Data P.233
MG 4 45° HRC 60 G100 Finishing Cutting Data P.233

H P K

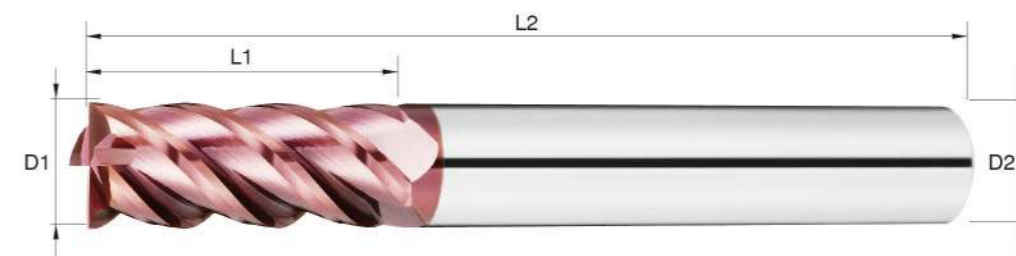

• FEATURES

- 4 Flute Square for up to HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- G100 Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SEK 0104	1.0	3	50	4
SEK 0154	1.5	4	50	4
SEK 0204	2.0	6	50	4
SEK 0306	3.0	8	50	6
SEK 0406	4.0	11	50	6
SEK 0506	5.0	13	50	6
SEK 0606	6.0	16	50	6
SEK 0808	8.0	20	60	8
SEK 1010	10.0	25	75	10
SEK 1212	12.0	30	75	12
SEK 1616	16.0	40	100	16
SEK 2020	20.0	45	100	20


S SUPER MILL

SEX

For HRC60 Steels / 4 Flute / Square

S 4 35° HRC 60 i8 Finishing Cutting Data P.233
MG

H P K

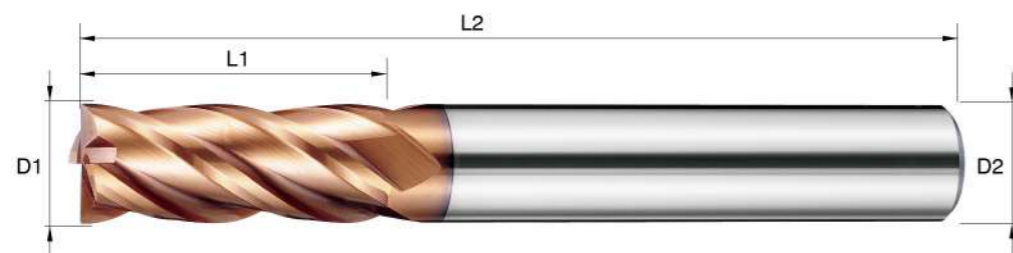

• FEATURES

- 4 Flute Square for up to HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SEX 0304	3.0	8	50	4
SEX 0404	4.0	11	50	4
SEX 0506	5.0	13	50	6
SEX 0606	6.0	16	50	6
SEX 0808	8.0	20	60	8
SEX 1010	10.0	25	75	10
SEX 1212	12.0	30	75	12
SEX 1616	16.0	40	100	16
SEX 2020	20.0	45	100	20


S SUPER MILL

SEP

For HRC60 Steels / 4 Flute / Power / Square

S 4 45° HRC 60 HELICA Roughing Cutting Data P.234
MG

H P K

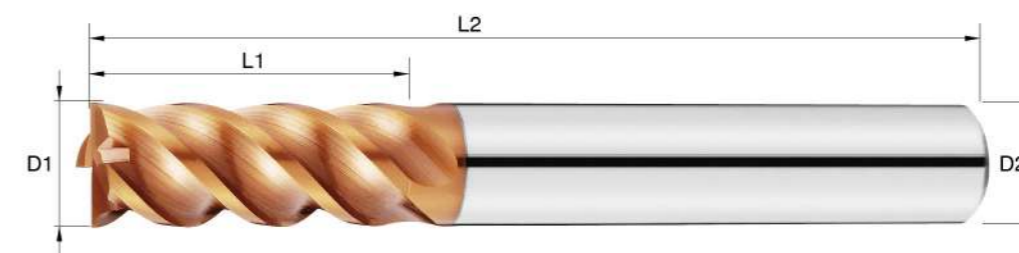

• FEATURES

- Power roughing 4 Flute Square for up to HRC60.
- Round and wide chip gullet designed for heavy duty milling.
- HELICA Coating: Heat resistance and low wear.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SEP 0306	3.0	8	50	6
SEP 0406	4.0	11	50	6
SEP 0506	5.0	13	50	6
SEP 0606	6.0	16	50	6
SEP 0808	8.0	20	60	8
SEP 1010	10.0	25	75	10
SEP 1212	12.0	30	75	12
SEP 1616	16.0	40	100	16
SEP 2020	20.0	45	100	20


S SUPER MILL

SEWV

For HRC60 Steels / 4 Flute / Square

S MG 4 35°/38° α°/β° HRC 60 G-plus Finishing Semi-Finishing Cutting Data P.234

H P K

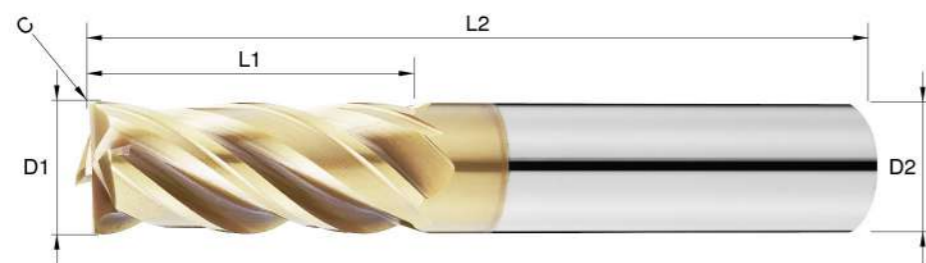

• FEATURES

- 4 Flute Square for up to HRC60.
- Variable helix angle and unequal flute spacing designed for stability and anti-vibration.
- G-plus Coating: Excellent wear resistance and heat resistant.

• ITEMS

Order No.	Diameter D1	Chamfer C	Flute Length L1	O.A.L. L2	Shank Dia D2
SEWV 0306	3.0	0.2	8	50	6
SEWV 0406	4.0	0.2	11	50	6
SEWV 0506	5.0	0.2	13	50	6
SEWV 0606	6.0	0.2	16	50	6
SEWV 0808	8.0	0.2	20	60	8
SEWV 1010	10.0	0.3	25	75	10
SEWV 1212	12.0	0.3	30	75	12
SEWV 1616	16.0	0.5	40	100	16
SEWV 2020	20.0	0.5	45	100	20


S SUPER MILL

SEPC

For HRC60 Steels / 3 Flute / Square

S MG 3 45° i8 Cutting Data P.235

H P K

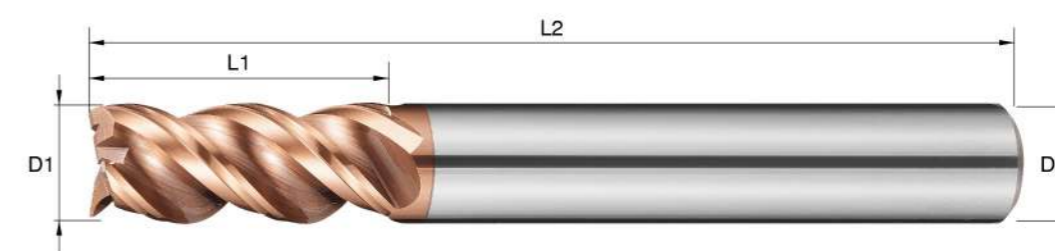

• FEATURES

- 3 Flute Square for up to HRC60.
- Unique chip-removal flute design; excellent for plunging & slotting on special-shaped workpiece.
- i8 Coated SEPC brings unexpected high performance on most steels.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SEPC 0206	2.0	6	50	6
SEPC 0256	2.5	6	50	6
SEPC 0306	3.0	8	50	6
SEPC 0356	3.5	8	50	6
SEPC 0406	4.0	11	50	6
SEPC 0456	4.5	11	50	6
SEPC 0506	5.0	13	50	6
SEPC 0606	6.0	16	50	6
SEPC 0808	8.0	21	65	8
SEPC 1010	10.0	25	80	10
SEPC 1212	12.0	30	80	12

• discontinuation

SEW Product Series with G300 coating will be discontinued after Dec. 2024. We will continue to ship SEW orders until our inventory is depleted. If you'd like to purchase SEW products, please contact your HGT sales representative while stocks last. The replacement of SEW is SEWV Product Series, which is original SEW with new coating G-plus.

SEW



S SUPER MILL

SELA

For HRC60 Steels / 2 Flute / Long Shank / Square

S MG 2 35° HRC 60 ALTiN Finishing Semi-Finishing Cutting Data P.233

H P K



• FEATURES

- Long Shank 2 Flute Square for up to HRC60.
- Extended overall length for greater depth of cut.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SELA 0606	6.0	15	75	6
SELA 0606A	6.0	15	100	6
SELA 0808	8.0	20	100	8
SELA 1010	10.0	25	100	10
SELA 1010A	10.0	25	150	10
SELA 1212	12.0	30	100	12
SELA 1212A	12.0	30	150	12

S SUPER MILL

SELB

For HRC60 Steels / 4 Flute / Long Shank / Square

S MG 4 35° HRC 60 ALTiN Finishing Semi-Finishing Cutting Data P.233

H P K



• FEATURES

- Long Shank 4 Flute Square for up to HRC60.
- Extended overall length for greater depth of cut.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SELB 0303	3.0	8	75	3
SELB 0404	4.0	11	75	4
SELB 0606	6.0	15	75	6
SELB 0606A	6.0	15	100	6
SELB 0808	8.0	20	100	8
SELB 1010	10.0	25	100	10
SELB 1010A	10.0	25	150	10
SELB 1212	12.0	30	100	12
SELB 1212A	12.0	30	150	12
SELB 1616	16.0	40	150	16


S SUPER MILL

SELD

For HRC60 Steels / 4 Flute / Long Flute / Square

S MG 4 35° HRC 60 ALTiN Finishing Cutting Data P.235

H P K

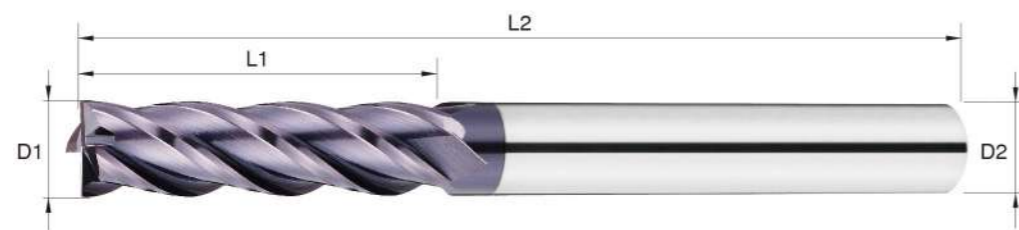

• FEATURES

- Long Flute 4 Flute Square for up to HRC60.
- Extended flute length (L1) suitable for deep side milling.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SELD 0404	4.0	25	75	4
SELD 0506	5.0	30	75	6
SELD 0606	6.0	30	75	6
SELD 0808	8.0	40	100	8
SELD 1010	10.0	40	100	10
SELD 1212	12.0	45	100	12


unit: mm

S SHA

For HRC60 Steels / 6 Flute / Square

S MG 6 45° HRC 60 ALTiN Finishing Cutting Data P.235

H P K

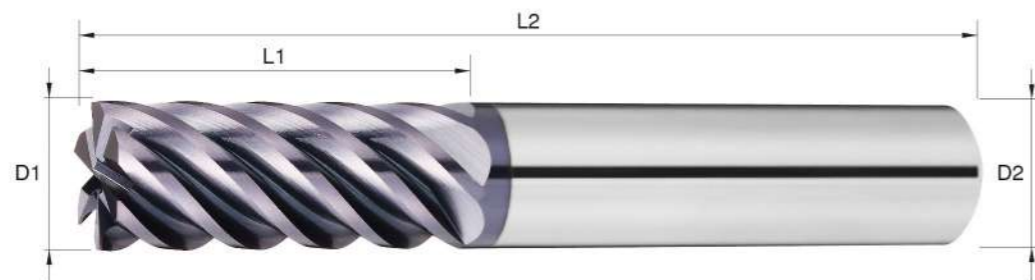

• FEATURES

- 6 Flute Square for up to HRC60.
- 6 Flute designed to bring excellent finishing for side milling.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SHA 0606	6.0	16	50	6
SHA 0808	8.0	20	60	8
SHA 1010	10.0	25	75	10
SHA 1212	12.0	30	75	12
SHA 1616	16.0	40	100	16

unit: mm


S SUPER MILL

SEZ

For HRC60 Steels / 4 Flute / Chamfer / Square


S MG 4 45° HRC 60 ALTiN Finishing Cutting Data P.236

H P K

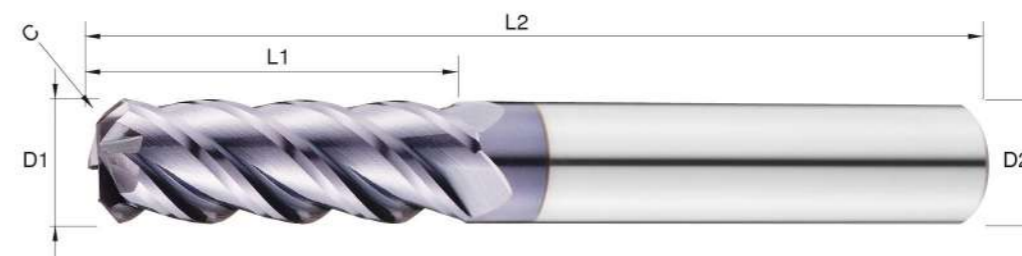

• FEATURES

- Chamfer 4 Flute Square for up to HRC60.
- Multi function corner chamfer designed for milling and chamfering at the same time.
- ALTiN Coating for Hardened steel.

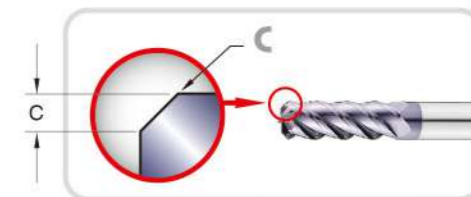

• ITEMS

Order No.	Diameter D1	Chamfer C	Flute Length L1	O.A.L. L2	Shank Dia D2
SEZ 0405	4.0	0.5	11	50	6
SEZ 0410	4.0	1.0	11	50	6
SEZ 0605	6.0	0.5	16	50	6
SEZ 0610	6.0	1.0	16	50	6
SEZ 0805	8.0	0.5	20	60	8
SEZ 0810	8.0	1.0	20	60	8
SEZ 1005	10.0	0.5	25	75	10
SEZ 1010	10.0	1.0	25	75	10
SEZ 1020	10.0	2.0	25	75	10
SEZ 1205	12.0	0.5	30	75	12
SEZ 1210	12.0	1.0	30	75	12
SEZ 1220	12.0	2.0	30	75	12

unit: mm


S SUPER MILL

SRW

For HRC60 Steels / 4 Flute / Corner Radius

S MG 4 35°/38° α°/β° HRC 60 G-plus Finishing Cutting Data P.236

H P K

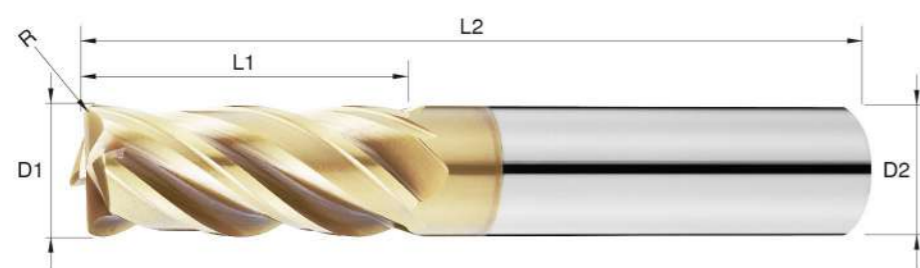

• FEATURES

- 4 Flute Corner Radius for HRC60.
- Variable helix angle and unequal flute spacing offer great stability and anti-vibration.
- G-plus Coating: High temperature resistance and low wear.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	unit: mm	
				O.A.L. L2	Shank Dia D2
SRW 0302	3.0	0.2	8	50	6
SRW 0305	3.0	0.5	8	50	6
SRW 0402	4.0	0.2	11	50	6
SRW 0405	4.0	0.5	11	50	6
SRW 0605	6.0	0.5	16	50	6
SRW 0610	6.0	1.0	16	50	6
SRW 0805	8.0	0.5	20	60	8
SRW 0810	8.0	1.0	20	60	8
SRW 1005	10.0	0.5	25	75	10
SRW 1010	10.0	1.0	25	75	10
SRW 1020	10.0	2.0	25	75	10
SRW 1030	10.0	3.0	25	75	10
SRW 1205	12.0	0.5	30	75	12
SRW 1210	12.0	1.0	30	75	12
SRW 1220	12.0	2.0	30	75	12
SRW 1230	12.0	3.0	30	75	12


S SUPER MILL

SRA

For HRC60 Steels / 2 Flute / Corner Radius

S MG 2 35° α°/β° HRC 60 ALTiN Finishing Cutting Data P.236

H P K

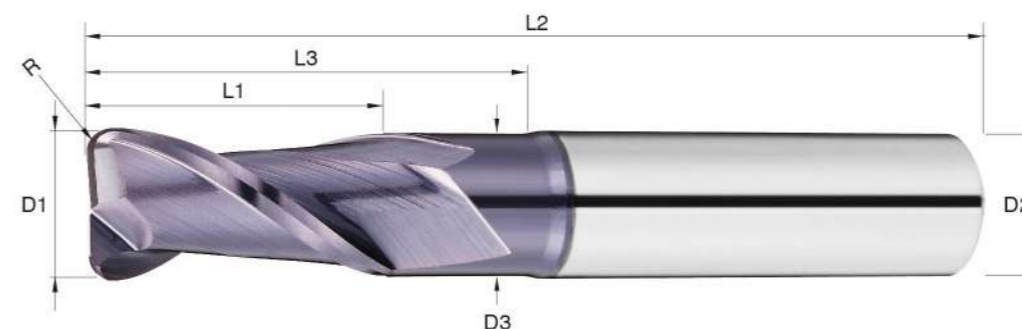

• FEATURES

- 2 Flute Corner Radius for HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	unit: mm	
						O.A.L. L2	Shank Dia D2
SRA 0402	4.0	0.2	3.88	8	12	50	4
SRA 0405	4.0	0.5	3.88	8	12	50	4
SRA 0602	6.0	0.2	5.80	12	18	50	6
SRA 0605	6.0	0.5	5.80	12	18	50	6
SRA 0610	6.0	1.0	5.80	12	18	50	6
SRA 0803	8.0	0.3	7.70	16	24	60	8
SRA 0805	8.0	0.5	7.70	16	24	60	8
SRA 0810	8.0	1.0	7.70	16	24	60	8
SRA 1003	10.0	0.3	9.60	20	30	75	10
SRA 1005	10.0	0.5	9.60	20	30	75	10
SRA 1010	10.0	1.0	9.60	20	30	75	10
SRA 1020	10.0	2.0	9.60	20	30	75	10
SRA 1210	12.0	1.0	11.50	24	36	75	12
SRA 1220	12.0	2.0	11.50	24	36	75	12
SRA 1605	16.0	0.5	15.40	30	40	100	16
SRA 1610	16.0	1.0	15.40	30	40	100	16


S SUPER MILL

SRB

For HRC60 Steels / 4 Flute / Corner Radius

S 4 35° HRC 60 ALTiN Finishing Semi-Finishing Cutting Data P.236

H P K

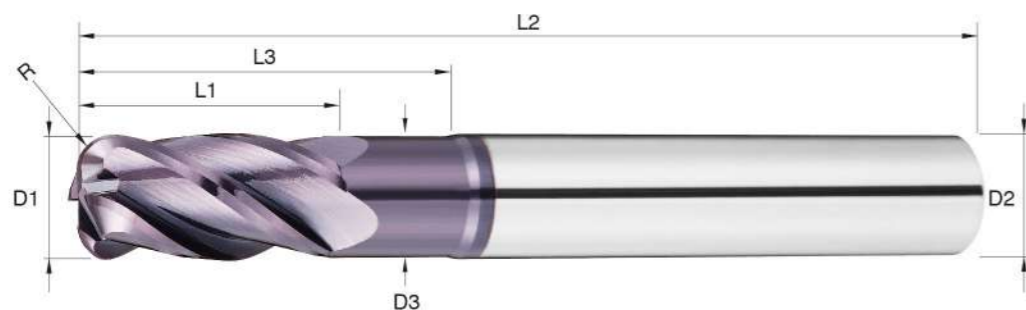

• FEATURES

- 4 Flute Corner Radius for HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- ALTiN Coating for Hardened steel.

• ITEMS

unit: mm

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
SRB 0402	4.0	0.2	3.88	8	12	50	4
SRB 0405	4.0	0.5	3.88	8	12	50	4
SRB 0602	6.0	0.2	5.80	12	18	50	6
SRB 0605	6.0	0.5	5.80	12	18	50	6
SRB 0610	6.0	1.0	5.80	12	18	50	6
SRB 0803	8.0	0.3	7.70	16	24	60	8
SRB 0805	8.0	0.5	7.70	16	24	60	8
SRB 0810	8.0	1.0	7.70	16	24	60	8
SRB 1005	10.0	0.5	9.60	20	30	75	10
SRB 1010	10.0	1.0	9.60	20	30	75	10
SRB 1020	10.0	2.0	9.60	20	30	75	10
SRB 1030	10.0	3.0	9.60	20	30	75	10
SRB 1205	12.0	0.5	11.50	24	36	75	12
SRB 1210	12.0	1.0	11.50	24	36	75	12
SRB 1605	16.0	0.5	15.40	30	40	100	16
SRB 1610	16.0	1.0	15.40	30	40	100	16


S SUPER MILL

SRC

For HRC60 Steels / 2 Flute / Corner Radius

S 2 35° HRC 60 ALTiN Finishing Semi-Finishing Cutting Data P.236

H P K

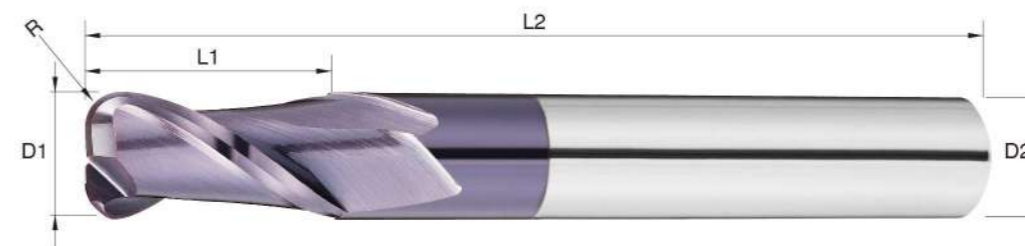

• FEATURES

- 2 Flute Corner Radius for HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
SRC 0302	3.0	0.2	6	50	3
SRC 0305	3.0	0.5	6	50	3
SRC 0402	4.0	0.2	8	50	4
SRC 0405	4.0	0.5	8	50	4
SRC 0410	4.0	1.0	8	50	4
SRC 0602	6.0	0.2	12	50	6
SRC 0605	6.0	0.5	12	50	6
SRC 0610	6.0	1.0	12	50	6
SRC 0615	6.0	1.5	12	50	6
SRC 0620	6.0	2.0	12	50	6
SRC 0803	8.0	0.3	16	60	8
SRC 0805	8.0	0.5	16	60	8
SRC 0810	8.0	1.0	16	60	8
SRC 0815	8.0	1.5	16	60	8
SRC 0820	8.0	2.0	16	60	8
SRC 1003	10.0	0.3	20	75	10
SRC 1005	10.0	0.5	20	75	10
SRC 1010	10.0	1.0	20	75	10
SRC 1015	10.0	1.5	20	75	10
SRC 1020	10.0	2.0	20	75	10
SRC 1030	10.0	3.0	20	75	10
SRC 1205	12.0	0.5	24	75	12
SRC 1210	12.0	1.0	24	75	12
SRC 1215	12.0	1.5	24	75	12
SRC 1220	12.0	2.0	24	75	12
SRC 1230	12.0	3.0	24	75	12


S SUPER MILL

SRD

For HRC60 Steels / 4 Flute / Corner Radius

S 4 35° R HRC 60 ALTiN Finishing Semi-Finishing Cutting Data P.236

H P K

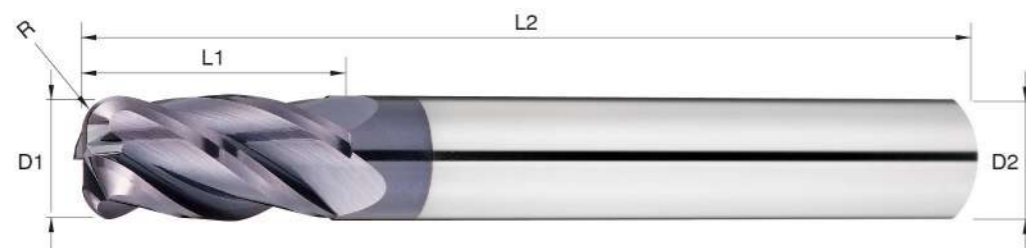

• FEATURES

- 4 Flute Corner Radius for HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- ALTiN Coating for Hardened steel.

• ITEMS

unit: mm

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
SRD 01502	1.5	0.2	3	50	4
SRD 0202	2.0	0.2	4	50	4
SRD 0205	2.0	0.5	4	50	4
SRD 0302	3.0	0.2	6	50	3
SRD 0302.4	3.0	0.2	6	50	4
SRD 0303.4	3.0	0.3	6	50	4
SRD 0305	3.0	0.5	6	50	3
SRD 0305.4	3.0	0.5	6	50	4
SRD 0310.4	3.0	1.0	6	50	4
SRD 0402	4.0	0.2	8	50	4
SRD 0405	4.0	0.5	8	50	4
SRD 0410	4.0	1.0	8	50	4
SRD 0602	6.0	0.2	12	50	6
SRD 0603	6.0	0.3	12	50	6
SRD 0605	6.0	0.5	12	50	6
SRD 0610	6.0	1.0	12	50	6
SRD 0615	6.0	1.5	12	50	6
SRD 0620	6.0	2.0	12	50	6
SRD 0803	8.0	0.3	16	60	8
SRD 0805	8.0	0.5	16	60	8
SRD 0810	8.0	1.0	16	60	8
SRD 0815	8.0	1.5	16	60	8
SRD 0820	8.0	2.0	16	60	8
SRD 1003	10.0	0.3	20	75	10
SRD 1005	10.0	0.5	20	75	10
SRD 1010	10.0	1.0	20	75	10
SRD 1015	10.0	1.5	20	75	10
SRD 1020	10.0	2.0	20	75	10
SRD 1030	10.0	3.0	20	75	10
SRD 1205	12.0	0.5	24	75	12
SRD 1210	12.0	1.0	24	75	12
SRD 1215	12.0	1.5	24	75	12
SRD 1220	12.0	2.0	24	75	12
SRD 1230	12.0	3.0	24	75	12


S SUPER MILL

SRDX

For HRC60 Steels / 4 Flute / Corner Radius

S 4 45° R HRC 60 i8 Finishing Semi-Finishing Cutting Data P.236

H P K

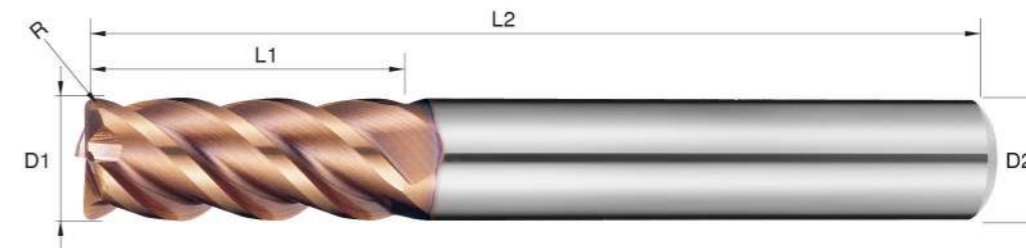

• FEATURES

- 4 Flute Corner Radius for HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

unit: mm

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
SRDX 0302	3.0	0.2	6	50	3
SRDX 0305	3.0	0.5	6	50	3
SRDX 0402	4.0	0.2	8	50	4
SRDX 0405	4.0	0.5	8	50	4
SRDX 0605	6.0	0.5	12	50	6
SRDX 0610	6.0	1.0	12	50	6
SRDX 0805	8.0	0.5	16	60	8
SRDX 0810	8.0	1.0	16	60	8
SRDX 1005	10.0	0.5	20	75	10
SRDX 1010	10.0	1.0	20	75	10
SRDX 1020	10.0	2.0	20	75	10
SRDX 1030	10.0	3.0	20	75	10
SRDX 1205	12.0	0.5	24	75	12
SRDX 1210	12.0	1.0	24	75	12
SRDX 1220	12.0	2.0	24	75	12
SRDX 1230	12.0	3.0	24	75	12


S SUPER MILL

SRK

For HRC60 Steels / 4 Flute / Corner Radius

S MG 4 45° R HRC 60 G100 Finishing Cutting Data P.236

H P K

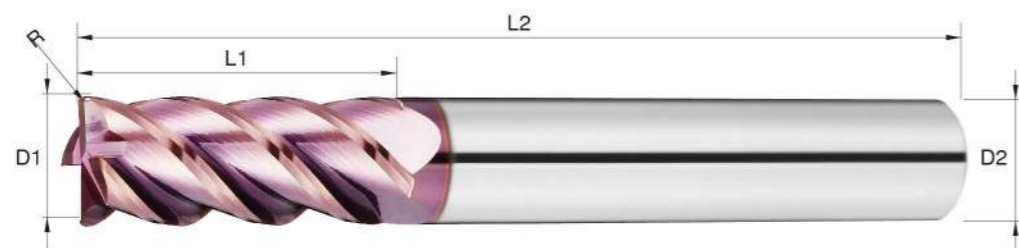

• FEATURES

- 4 Flute Corner Radius for HRC60.
- Hardened steel, Cast iron, Low/High alloy steel, cast steel, and tool steel.
- G100 Coating for General steel.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	unit: mm	
				O.A.L. L2	Shank Dia D2
SRK 0302	3.0	0.2	8	50	3
SRK 0305	3.0	0.5	8	50	3
SRK 0402	4.0	0.2	11	50	4
SRK 0405	4.0	0.5	11	50	4
SRK 0410	4.0	1.0	11	50	4
SRK 0602	6.0	0.2	16	50	6
SRK 0605	6.0	0.5	16	50	6
SRK 0610	6.0	1.0	16	50	6
SRK 0615	6.0	1.5	16	50	6
SRK 0620	6.0	2.0	16	50	6
SRK 0803	8.0	0.3	20	60	8
SRK 0805	8.0	0.5	20	60	8
SRK 0810	8.0	1.0	20	60	8
SRK 0815	8.0	1.5	20	60	8
SRK 0820	8.0	2.0	20	60	8
SRK 1003	10.0	0.3	25	75	10
SRK 1005	10.0	0.5	25	75	10
SRK 1010	10.0	1.0	25	75	10
SRK 1015	10.0	1.5	25	75	10
SRK 1020	10.0	2.0	25	75	10
SRK 1030	10.0	3.0	25	75	10
SRK 1205	12.0	0.5	30	75	12
SRK 1210	12.0	1.0	30	75	12
SRK 1215	12.0	1.5	30	75	12
SRK 1220	12.0	2.0	30	75	12
SRK 1230	12.0	3.0	30	75	12


S SUPER MILL

SERC

For HRC60 Steels / 4 Flute / Long Shank Corner Radius

S MG 4 35° R HRC 60 ALTiN Finishing Cutting Data P.236

H P K

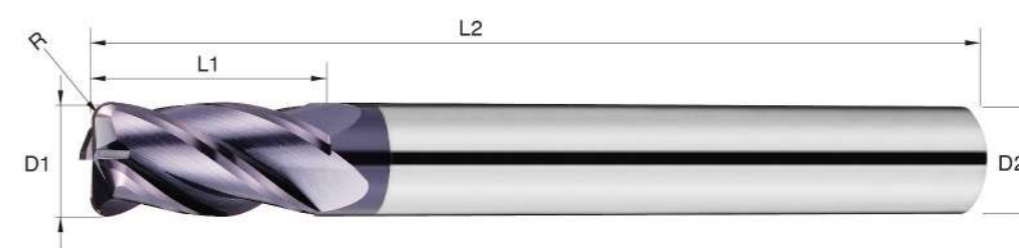

• FEATURES

- Long Shank 4 Flute Corner Radius for HRC60.
- Extended overall length for greater depth of cut.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	unit: mm	
				O.A.L. L2	Shank Dia D2
SERC 0605	6.0	0.5	12	75	6
SERC 0605A	6.0	0.5	12	100	6
SERC 0610	6.0	1.0	12	75	6
SERC 0610A	6.0	1.0	12	100	6
SERC 0805	8.0	0.5	16	100	8
SERC 0810	8.0	1.0	16	100	8
SERC 1005	10.0	0.5	20	100	10
SERC 1010	10.0	1.0	20	100	10
SERC 1020	10.0	2.0	20	100	10
SERC 1205	12.0	0.5	24	100	12
SERC 1210	12.0	1.0	24	100	12
SERC 1220	12.0	2.0	24	100	12


S SUPER MILL

SERCX

S 4 45° R HRC 60 i8 Finishing Cutting Data P.236
MG

For HRC60 Steels / 4 Flute / Long Shank Corner Radius

H P K

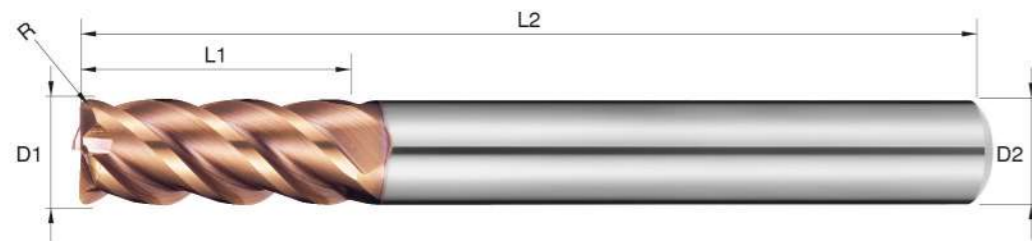

• FEATURES

- Long Shank 4 Flute Corner Radius for HRC60.
- Extended overall length for greater depth of cut.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	unit: mm	
				O.A.L. L2	Shank Dia D2
SERCX 0605	6.0	0.5	12	75	6
SERCX 0610	6.0	1.0	12	75	6
SERCX 0805	8.0	0.5	16	100	8
SERCX 0810	8.0	1.0	16	100	8
SERCX 1005	10.0	0.5	20	100	10
SERCX 1010	10.0	1.0	20	100	10
SERCX 1020	10.0	2.0	20	100	10
SERCX 1205	12.0	0.5	24	100	12
SERCX 1210	12.0	1.0	24	100	12
SERCX 1220	12.0	2.0	24	100	12


S SUPER MILL

SRP

S 4 5° R HRC 60 ALTiN Roughing Cutting Data P.236
MG

For HRC60 Steels / 4 Flute / Power Corner Radius

H P K

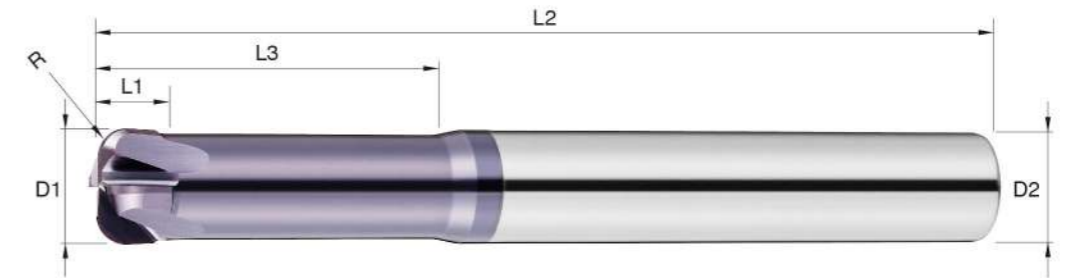

• FEATURES

- Power 4 Flute Corner Radius for HRC60.
- Helix Angle 5 ° with flute length 0.5D designed for heavy duty profile milling.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Corner R	Flute Length L1	unit: mm	
				Effective Length L3	O.A.L. L2
SRP 0615	6.0	1.5	3	18	50
SRP 0615A	6.0	1.5	3	18	75
SRP 0820	8.0	2.0	4	24	60
SRP 0820A	8.0	2.0	4	24	100
SRP 1020	10.0	2.0	5	30	75
SRP 1020A	10.0	2.0	5	30	100
SRP 1230	12.0	3.0	6	36	75
SRP 1230A	12.0	3.0	6	36	100


S SUPER MILL

SBF

For HRC60 Steels / 2 Flute / Long Neck / Ball Nose

S MG 2 30° HRC 60 ALTiN Finishing Cutting Data P.237

H P K

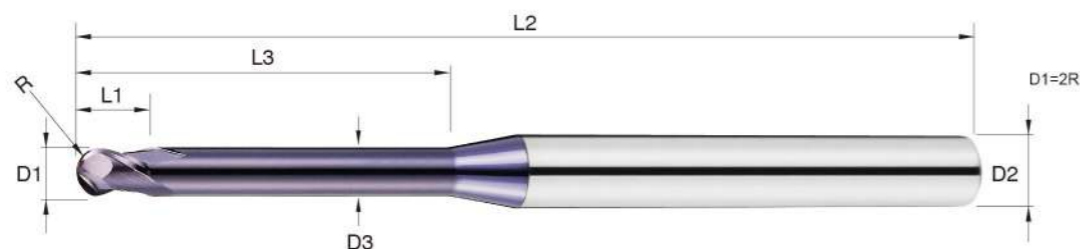

• FEATURES

- Long Neck 2 Flute Ball Nose for HRC60.
- R0.25~R2.0 mm with effective length 4~30 mm excellent for rib milling.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
SBF 00504	R0.25	0.46	0.5	4	50	4
SBF 00506	R0.25	0.46	0.5	6	50	4
SBF 00604	R0.3	0.56	0.6	4	50	4
SBF 00606	R0.3	0.56	0.6	6	50	4
SBF 00806	R0.4	0.76	0.8	6	50	4
SBF 00808	R0.4	0.76	0.8	8	50	4
SBF 01006	R0.5	0.95	1.5	6	50	4
SBF 01008	R0.5	0.95	1.5	8	50	4
SBF 01010	R0.5	0.95	1.5	10	50	4
SBF 01012	R0.5	0.95	1.5	12	50	4
SBF 01208	R0.6	1.15	2	8	50	4
SBF 01212	R0.6	1.15	2	12	50	4
SBF 01508	R0.75	1.45	2	8	50	4
SBF 01512	R0.75	1.45	2	12	50	4
SBF 01516	R0.75	1.45	2	16	50	4
SBF 01520	R0.75	1.45	2	20	50	4
SBF 01608	R0.8	1.54	2.5	8	50	4
SBF 01612	R0.8	1.54	2.5	12	50	4
SBF 01616	R0.8	1.54	2.5	16	50	4
SBF 02008	R1.0	1.92	3	8	50	4
SBF 02012	R1.0	1.92	3	12	50	4
SBF 02016	R1.0	1.92	3	16	50	4
SBF 02020	R1.0	1.92	3	20	50	4
SBF 03008	R1.5	2.90	4	8	50	6
SBF 03010	R1.5	2.90	4	10	50	6
SBF 03016	R1.5	2.90	4	16	50	6
SBF 03020	R1.5	2.90	4	20	75	6
SBF 03025	R1.5	2.90	4	25	75	6
SBF 04010	R2.0	3.88	5	10	75	6
SBF 04015	R2.0	3.88	5	15	75	6
SBF 04020	R2.0	3.88	5	20	75	6
SBF 04025	R2.0	3.88	5	25	75	6
SBF 04030	R2.0	3.88	5	30	75	6

S SUPER MILL

SBFV

For HRC60 Steels / 2 Flute / Long Neck / Ball Nose

S MG 2 30° HRC 60 i-X Finishing Cutting Data P.237

H P K



• FEATURES

- Long Neck 2 Flute Ball Nose for HRC60.
- R0.25~R2.0 mm with effective length 4~30 mm excellent for rib milling.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
SBFV 00504	R0.25	0.46	0.5	4	50	4
SBFV 00506	R0.25	0.46	0.5	6	50	4
SBFV 00604	R0.3	0.56	0.6	4	50	4
SBFV 00606	R0.3	0.56	0.6	6	50	4
SBFV 00806	R0.4	0.76	0.8	6	50	4
SBFV 00808	R0.4	0.76	0.8	8	50	4
SBFV 01006	R0.5	0.95	1.5	6	50	4
SBFV 01008	R0.5	0.95	1.5	8	50	4
SBFV 01010	R0.5	0.95	1.5	10	50	4
SBFV 01012	R0.5	0.95	1.5	12	50	4
SBFV 01208	R0.6	1.15	2	8	50	4
SBFV 01212	R0.6	1.15	2	12	50	4
SBFV 01508	R0.75	1.45	2	8	50	4
SBFV 01512	R0.75	1.45	2	12	50	4
SBFV 01516	R0.75	1.45	2	16	50	4
SBFV 01520	R0.75	1.45	2	20	50	4
SBFV 01608	R0.8	1.54	2.5	8	50	4
SBFV 01612	R0.8	1.54	2.5	12	50	4
SBFV 01616	R0.8	1.54	2.5	16	50	4
SBFV 02008	R1.0	1.92	3	8	50	4
SBFV 02012	R1.0	1.92	3	12	50	4
SBFV 02016	R1.0	1.92	3	16	50	4
SBFV 02020	R1.0	1.92	3	20	50	4
SBFV 03008	R1.5	2.90	4	8	50	6
SBFV 03010	R1.5	2.90	4	10	50	6
SBFV 03016	R1.5	2.90	4	16	50	6
SBFV 03020	R1.5	2.90	4	20	75	6
SBFV 03025	R1.5	2.90	4	25	75	6
SBFV 04010	R2.0	3.88	5	10	75	6
SBFV 04015	R2.0	3.88	5	15	75	6
SBFV 04020	R2.0	3.88	5	20	75	6
SBFV 04025	R2.0	3.88	5	25	75	6
SBFV 04030	R2.0	3.88	5	30	75	6



• discontinuation

SBFX Product Series with i8 coating will be discontinued after Dec. 2024. We will continue to ship SBFX orders until our inventory is depleted. If you'd like to purchase SBFX products, please contact your HGT sales representative while stocks last. The replacement of SBFX is SBFV Product Series, which is original SBFX with new coating i-X.


S SUPER MILL

SEFA

For HRC60 Steels / 2 Flute / Long Neck / Square

S 2 35° HRC 60 ALTiN Finishing Cutting Data
MG 2 35° HRC 60 ALTiN Semi-Finishing P.237

H P K

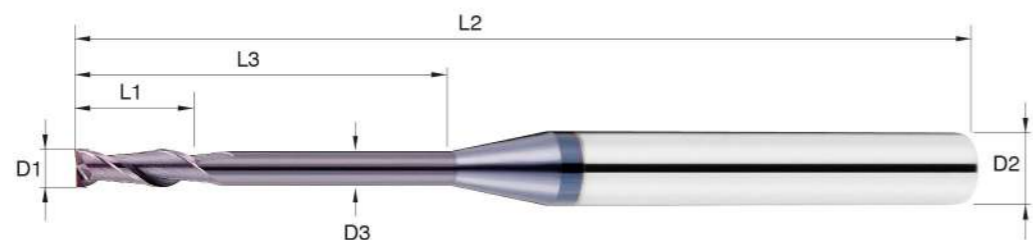

• FEATURES

- Long Neck 2 Flute Square for HRC60.
- Dia 1.0~3.0 mm with effective length 6~25 mm excellent for rib milling.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Neck Dia D3	Flute Length		Effective Length L3	O.A.L. L2	Shank Dia D2
			L1	L3			
SEFA 01006	1.0	0.95	3	6	6	50	4
SEFA 01008	1.0	0.95	3	8	8	50	4
SEFA 01010	1.0	0.95	3	10	10	50	4
SEFA 01012	1.0	0.95	3	12	12	50	4
SEFA 01508	1.5	1.45	4	8	8	50	4
SEFA 01510	1.5	1.45	4	10	10	50	4
SEFA 01512	1.5	1.45	4	12	12	50	4
SEFA 01516	1.5	1.45	4	16	16	50	4
SEFA 02008	2.0	1.92	6	8	8	50	4
SEFA 02010	2.0	1.92	6	10	10	50	4
SEFA 02012	2.0	1.92	6	12	12	50	4
SEFA 02016	2.0	1.92	6	16	16	50	4
SEFA 02020	2.0	1.92	6	20	20	50	4
SEFA 02510	2.5	2.40	8	10	10	50	4
SEFA 02512	2.5	2.40	8	12	12	50	4
SEFA 02516	2.5	2.40	8	16	16	50	4
SEFA 02520	2.5	2.40	8	20	20	50	4
SEFA 03010	3.0	2.90	8	10	10	50	6
SEFA 03012	3.0	2.90	8	12	12	50	6
SEFA 03016	3.0	2.90	8	16	16	50	6
SEFA 03020	3.0	2.90	8	20	20	75	6
SEFA 03025	3.0	2.90	8	25	25	75	6

S SUPER MILL

SEFAV

For HRC60 Steels / 2 Flute / Long Neck / Square

S 2 35° HRC 60 i-X Finishing Cutting Data
MG 2 35° HRC 60 i-X Semi-Finishing P.237

H P K



• FEATURES

- Long Neck 2 Flute Square for HRC60.
- Dia 1.0~3.0 mm with effective length 6~25 mm excellent for rib milling.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS

Order No.	Diameter D1	Neck Dia D3	Flute Length		Effective Length L3	O.A.L. L2	Shank Dia D2
			L1	L3			
SEFAV 01006	1.0	0.95	3	6	6	50	4
SEFAV 01008	1.0	0.95	3	8	8	50	4
SEFAV 01010	1.0	0.95	3	10	10	50	4
SEFAV 01012	1.0	0.95	3	12	12	50	4
SEFAV 01508	1.5	1.45	4	8	8	50	4
SEFAV 01510	1.5	1.45	4	10	10	50	4
SEFAV 01512	1.5	1.45	4	12	12	50	4
SEFAV 01516	1.5	1.45	4	16	16	50	4
SEFAV 02008	2.0	1.92	6	8	8	50	4
SEFAV 02010	2.0	1.92	6	10	10	50	4
SEFAV 02012	2.0	1.92	6	12	12	50	4
SEFAV 02016	2.0	1.92	6	16	16	50	4
SEFAV 02020	2.0	1.92	6	20	20	50	4
SEFAV 02510	2.5	2.40	8	10	10	50	4
SEFAV 02512	2.5	2.40	8	12	12	50	4
SEFAV 02516	2.5	2.40	8	16	16	50	4
SEFAV 02520	2.5	2.40	8	20	20	50	4
SEFAV 03010	3.0	2.90	8	10	10	50	6
SEFAV 03012	3.0	2.90	8	12	12	50	6
SEFAV 03016	3.0	2.90	8	16	16	50	6
SEFAV 03020	3.0	2.90	8	20	20	75	6
SEFAV 03025	3.0	2.90	8	25	25	75	6

SEFAX



• discontinuation

SEFAX Product Series with i8 coating will be discontinued after Dec. 2024. We will continue to ship SEFAX orders until our inventory is depleted. If you'd like to purchase SEFAX products, please contact your HGT sales representative while stocks last. The replacement of SEFAX is SEFAV Product Series, which is original SEFAX with new coating i-X.

S SUPER MILL

SEF



For HRC60 Steels / 2 Flute / Long Neck / Corner Radius



• FEATURES

- Long Neck 2 Flute Corner Radius for HRC60.
- Corner R0.1~R0.2 mm with effective length 4~20 mm excellent for rib milling.
- ALTiN Coating for Hardened steel.

• ITEMS

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	unit: mm	
							Shank Dia D2	
SEF 01004	1.0	0.1	0.95	1.0	4	50	4	
SEF 01006	1.0	0.1	0.95	1.0	6	50	4	
SEF 01008	1.0	0.1	0.95	1.0	8	50	4	
SEF 01010	1.0	0.1	0.95	1.0	10	50	4	
SEF 01504	1.5	0.2	1.45	1.5	4	50	4	
SEF 01506	1.5	0.2	1.45	1.5	6	50	4	
SEF 01508	1.5	0.2	1.45	1.5	8	50	4	
SEF 01510	1.5	0.2	1.45	1.5	10	50	4	
SEF 01512	1.5	0.2	1.45	1.5	12	50	4	
SEF 02008	2.0	0.2	1.92	2.0	8	50	4	
SEF 02010	2.0	0.2	1.92	2.0	10	50	4	
SEF 02012	2.0	0.2	1.92	2.0	12	50	4	
SEF 02016	2.0	0.2	1.92	2.0	16	50	4	
SEF 03008	3.0	0.2	2.90	3.0	8	50	6	
SEF 03010	3.0	0.2	2.90	3.0	10	50	6	
SEF 03012	3.0	0.2	2.90	3.0	12	50	6	
SEF 03016	3.0	0.2	2.90	3.0	16	50	6	
SEF 03020	3.0	0.2	2.90	3.0	20	50	6	

S SUPER MILL

SEFV



For HRC60 Steels / 2 Flute / Long Neck / Corner Radius



• FEATURES

- Long Neck 2 Flute Corner Radius for HRC60.
- Corner R0.1~R0.2 mm with effective length 4~20 mm excellent for rib milling.
- i-X new coating offers great heat resistance and friction resistance; suitable for Hardened steel.

• ITEMS


Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	unit: mm	
							Shank Dia D2	
SEFV 01004	1.0	0.1	0.95	1.0	4	50	4	
SEFV 01006	1.0	0.1	0.95	1.0	6	50	4	
SEFV 01008	1.0	0.1	0.95	1.0	8	50	4	
SEFV 01010	1.0	0.1	0.95	1.0	10	50	4	
SEFV 01504	1.5	0.2	1.45	1.5	4	50	4	
SEFV 01506	1.5	0.2	1.45	1.5	6	50	4	
SEFV 01508	1.5	0.2	1.45	1.5	8	50	4	
SEFV 01510	1.5	0.2	1.45	1.5	10	50	4	
SEFV 01512	1.5	0.2	1.45	1.5	12	50	4	
SEFV 02008	2.0	0.2	1.92	2.0	8	50	4	
SEFV 02010	2.0	0.2	1.92	2.0	10	50	4	
SEFV 02012	2.0	0.2	1.92	2.0	12	50	4	
SEFV 02016	2.0	0.2	1.92	2.0	16	50	4	
SEFV 03008	3.0	0.2	2.90	3.0	8	50	6	
SEFV 03010	3.0	0.2	2.90	3.0	10	50	6	
SEFV 03012	3.0	0.2	2.90	3.0	12	50	6	
SEFV 03016	3.0	0.2	2.90	3.0	16	50	6	
SEFV 03020	3.0	0.2	2.90	3.0	20	50	6	

SEFX



• discontinuation

SEFX Product Series with i8 coating will be discontinued after Dec. 2024. We will continue to ship SEFX orders until our inventory is depleted. If you'd like to purchase SEFX products, please contact your HGT sales representative while stocks last. The replacement of SEFX is SEFV Product Series, which is original SEFX with new coating i-X.

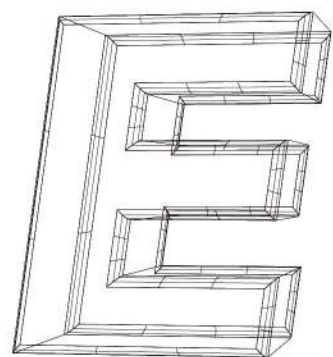

FOR HRC55 STEELS

EFFICIENCY MILLS


E EFFICIENCY MILLS

BM

MG
2
30°
HRC 55
TiAlN
Finishing Semi-Finishing
Cutting Data P.238

For HRC55 Steels / 2 Flute / Micro Diameter / Ball Nose

P
K

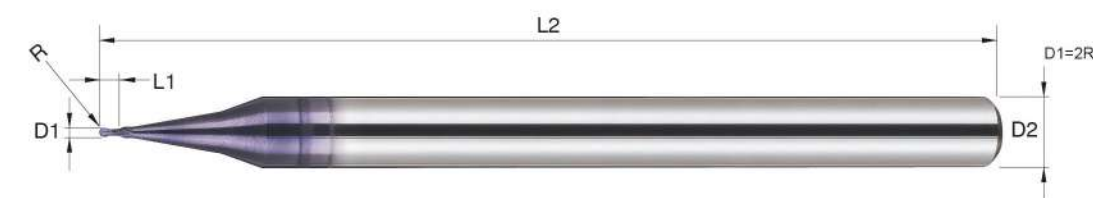

• FEATURES

- Micro Diameter 2 Flute Ball Nose for up to HRC55.
- TiAlN Coating for General steel.
- Radius(mm): R0.2~R0.9

• ITEMS

unit: mm

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
BM 0044	R0.2	0.8	50	4
BM 0054	R0.25	1.0	50	4
BM 0064	R0.3	1.2	50	4
BM 0074	R0.35	1.4	50	4
BM 0084	R0.4	1.6	50	4
BM 0094	R0.45	1.8	50	4
BM 0124	R0.6	2.4	50	4
BM 0144	R0.7	2.8	50	4
BM 0164	R0.8	3.2	50	4
BM 0184	R0.9	3.6	50	4


E EFFICIENCY MILLS

BS

MG 2 30° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.238

For HRC55 Steels / 2 Flute / Small Shank / Ball Nose

P K

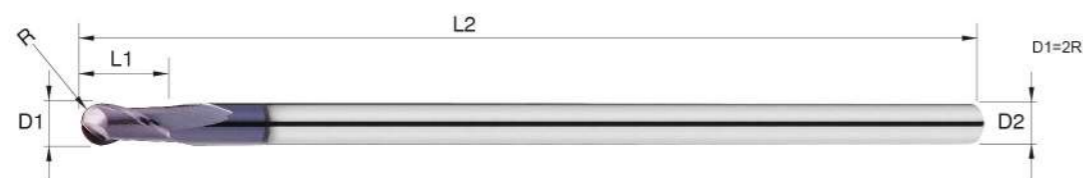

• FEATURES

- Small Shank 2 Flute Ball Nose for up to HRC55.
- TiAlN Coating for General steel.
- Radius(mm): R0.5~R2

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
BS 0103	R0.5	2	50	3
BS 0153	R0.75	3	50	3
BS 0203	R1	4	50	3
BS 0253	R1.25	5	50	3
BS 0303	R1.5	6	50	3
BS 0303A	R1.5	6	75	3
BS 0303B	R1.5	6	100	3
BS 0404	R2	8	75	4
BS 0404A	R2	8	100	4


E EFFICIENCY MILLS

BA

MG 2 30° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.238

For HRC55 Steels / 2 Flute / Ball Nose

P K

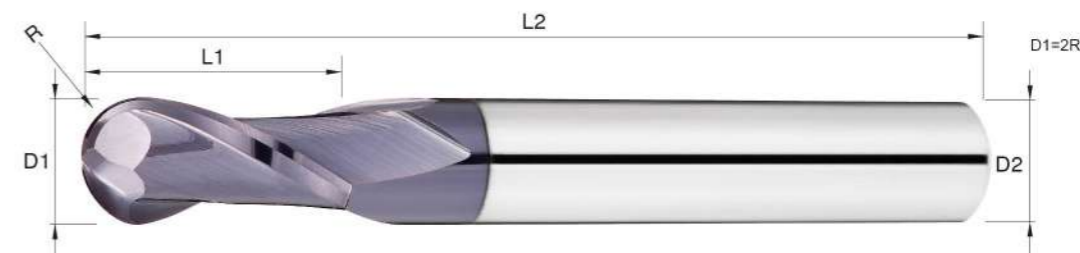

• FEATURES

- 2 Flute Ball Nose for workpiece up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
BA 0104	R0.5	2	50	4
BA 0154	R0.75	3	50	4
BA 0202	R1	4	50	2
BA 0204	R1	4	50	4
BA 0254	R1.25	5	50	4
BA 0304	R1.5	6	50	4
BA 0354	R1.75	7	50	4
BA 0404	R2	8	50	4
BA 0456	R2.25	9	50	6
BA 0505	R2.5	10	50	5
BA 0506	R2.5	10	50	6
BA 0556	R2.75	11	50	6
BA 0606	R3	12	50	6
BA 0707	R3.5	14	60	7
BA 0708	R3.5	14	60	8
BA 0808	R4	16	60	8
BA 0910	R4.5	18	75	10
BA 1010	R5	20	75	10
BA 1212	R6	24	75	12
BA 1616	R8	32	100	16
BA 2020	R10	40	100	20


E EFFICIENCY MILLS

BB

For HRC55 Steels / 4 Flute / Ball Nose

MG 4 30° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.238

P K

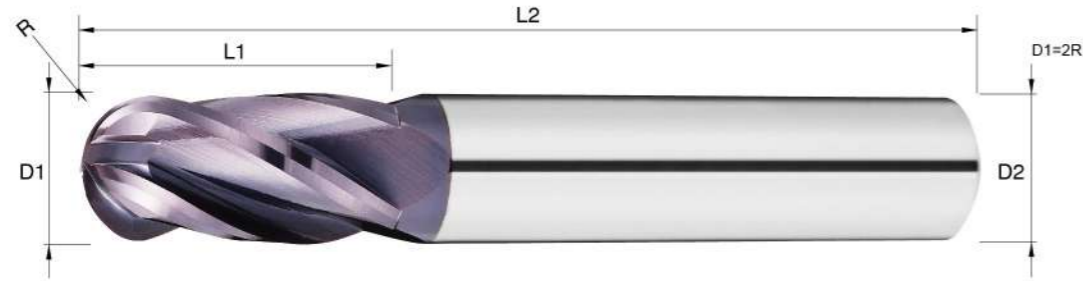

• FEATURES

- 4 Flute Ball Nose for workpiece up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
BB 0104	R0.5	2	50	4
BB 0154	R0.75	3	50	4
BB 0204	R1	4	50	4
BB 0254	R1.25	5	50	4
BB 0304	R1.5	6	50	4
BB 0404	R2	8	50	4
BB 0506	R2.5	10	50	6
BB 0606	R3	12	50	6
BB 0808	R4	16	60	8
BB 1010	R5	20	75	10
BB 1212	R6	24	75	12

unit: mm


E EFFICIENCY MILLS

BLS.BLM.BLL

For HRC55 Steels / 2 Flute / Long Shank / Ball Nose

MG 2 30° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.238

P K

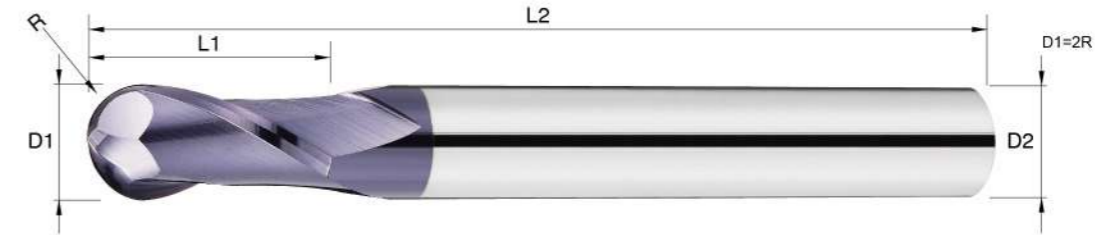

• FEATURES

- Long Shank 2 Flute Ball Nose for up to HRC55.
- Extended overall length for greater depth of cut.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
BLS 0104	R0.5	2	75	4
BLS 0106	R0.5	2	75	6
BLS 0154	R0.75	3	75	4
BLS 0156	R0.75	3	75	6
BLS 0206	R1	4	75	6
BLS 0256	R1.25	5	75	6
BLS 0306	R1.5	6	75	6
BLS 0406	R2	8	75	6
BLS 0506	R2.5	10	75	6
BLS 0606	R3	12	75	6
BLM 0206	R1	4	100	6
BLM 0306	R1.5	6	100	6
BLM 0406	R2	8	100	6
BLM 0606	R3	12	100	6
BLM 0808	R4	16	100	8
BLM 1010	R5	20	100	10
BLM 1212	R6	24	100	12
BLL 0606	R3	12	150	6
BLL 0808	R4	16	150	8
BLL 1010	R5	20	150	10
BLL 1212	R6	24	150	12
BLL 1616	R8	32	150	16
BLL 2020	R10	40	150	20

unit: mm

E EFFICIENCY MILLS

EM

For HRC55 Steels / 2 Flute / Micro Diameter / Square

MG 2 35° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.239

P K



• FEATURES

- Micro Diameter 2 Flute Square for up to HRC55.
- Dia 0.4~1.8 mm suitable for general purpose micro milling.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
EM 0044	0.4	0.8	50	4
EM 0054	0.5	1.0	50	4
EM 0064	0.6	1.2	50	4
EM 0074	0.7	1.4	50	4
EM 0084	0.8	1.6	50	4
EM 0094	0.9	1.8	50	4
EM 0124	1.2	3.0	50	4
EM 0144	1.4	3.0	50	4
EM 0164	1.6	4.0	50	4
EM 0184	1.8	5.0	50	4


E EFFICIENCY MILLS

ES

For HRC55 Steels / 2 Flute / Small Shank / Square

MG 2 35° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.239

P K

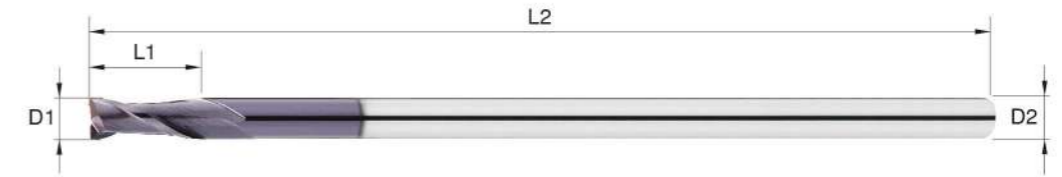

• FEATURES

- Small Shank 2 Flute Square for up to HRC55.
- Shank Diameter 3~4 mm with extended overall length; suitable for deeper narrow part milling.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
ES 0103	1.0	3	50	3
ES 0153	1.5	4	50	3
ES 0203	2.0	6	50	3
ES 0253	2.5	8	50	3
ES 0303	3.0	8	50	3
ES 0303A	3.0	8	75	3
ES 0303B	3.0	8	100	3
ES 0404	4.0	11	75	4
ES 0404A	4.0	11	100	4


E EFFICIENCY MILLS

EA

For HRC55 Steels / 2 Flute / Square

MG 2 35° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.239

P K

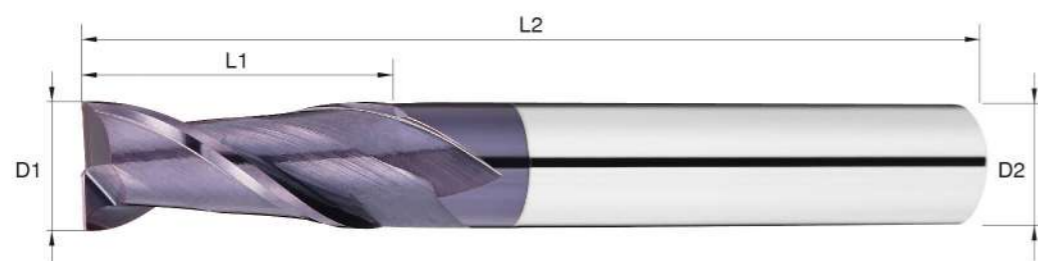

• FEATURES

- 2 Flute Square for up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
EA 0104	1.0	3	50	4
EA 0154	1.5	4	50	4
EA 0204	2.0	6	50	4
EA 0254	2.5	8	50	4
EA 0304	3.0	8	50	4
EA 0404	4.0	11	50	4
EA 0506	5.0	13	50	6
EA 0606	6.0	16	50	6
EA 0808	8.0	20	60	8
EA 1010	10.0	25	75	10
EA 1212	12.0	30	75	12
EA 1616	16.0	40	100	16
EA 2020	20.0	45	100	20


E EFFICIENCY MILLS

EB

For HRC55 Steels / 4 Flute / Square

MG 4 35° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.239

P K

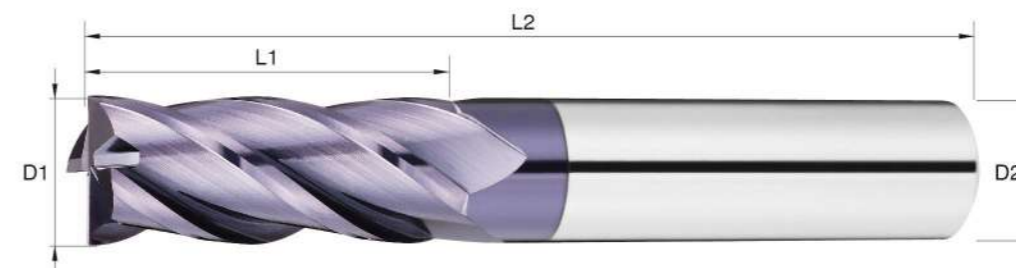

• FEATURES

- 4 Flute Square for up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
EB 0104	1.0	3	50	4
EB 0154	1.5	4	50	4
EB 0202	2.0	6	50	2
EB 0204	2.0	6	50	4
EB 0254	2.5	8	50	4
EB 0303	3.0	8	50	3
EB 0304	3.0	8	50	4
EB 0404	4.0	11	50	4
EB 0505	5.0	13	50	5
EB 0506	5.0	13	50	6
EB 0606	6.0	16	50	6
EB 0707	7.0	18	60	7
EB 0808	8.0	20	60	8
EB 1010	10.0	25	75	10
EB 1212	12.0	30	75	12
EB 1414	14.0	35	100	14
EB 1616	16.0	40	100	16
EB 1818	18.0	45	100	18
EB 2020	20.0	45	100	20


E EFFICIENCY MILLS

EC

For HRC55 Steels / 3 Flute / Square

MG 3 45° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.240

P K

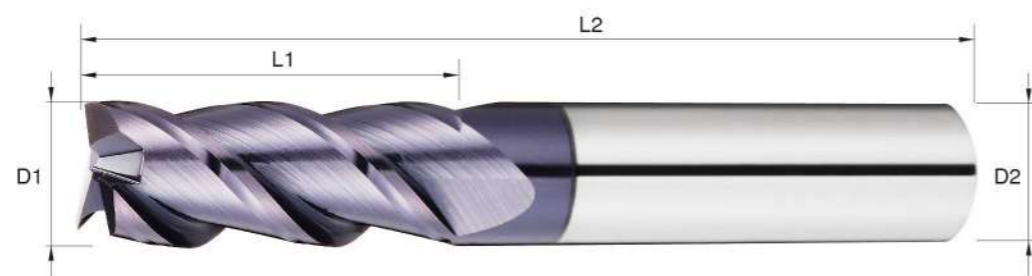

• FEATURES

- 3 Flute Square for up to HRC55.
- Helix Angle 45 ° to reduce cutting force.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
EC 0304	3.0	8	50	4
EC 0404	4.0	11	50	4
EC 0506	5.0	13	50	6
EC 0606	6.0	16	50	6
EC 0808	8.0	20	60	8
EC 1010	10.0	25	75	10
EC 1212	12.0	30	75	12
EC 1616	16.0	40	100	16
EC 2020	20.0	45	100	20


E EFFICIENCY MILLS

EP

For HRC55 Steels / 3 Flute / Square

MG 3 45° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.240

P K

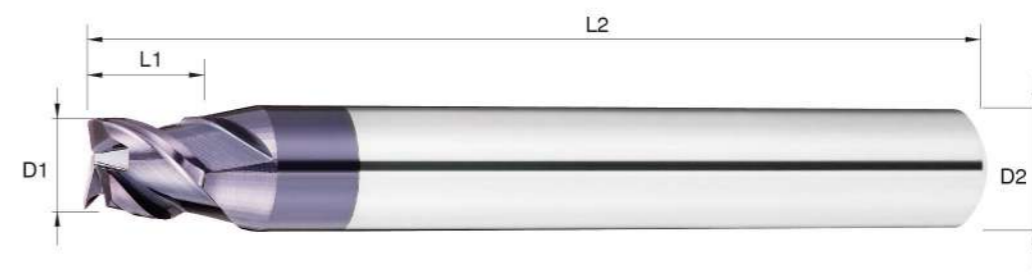

• FEATURES

- 3 Flute Square for up to HRC55.
- With larger shank diameter to increase tool's rigidity; suitable for keyway milling.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
EP 0306	3.0	3	50	6
EP 0406	4.0	4	50	6
EP 0506	5.0	5	50	6
EP 0608	6.0	6	60	8
EP 0810	8.0	8	75	10
EP 1012	10.0	10	75	12


E EFFICIENCY MILLS

ED

For HRC55 Steels / 4 Flute / Square

MG 4 45° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.241

P K M S

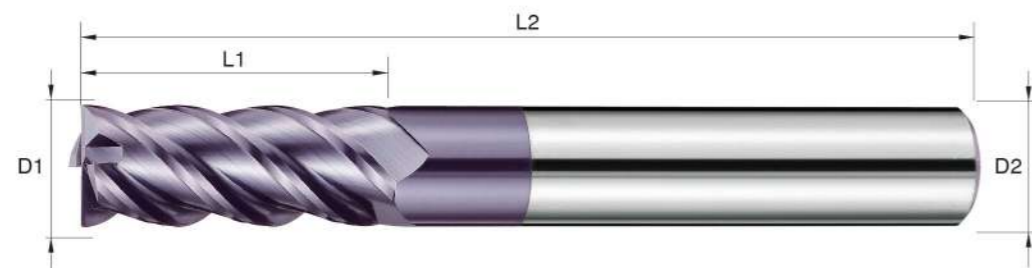

• FEATURES

- Helix Angle 45° 4 Flute Square for up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- Also for Stainless steel, High temp. alloy, and Titanium & Ti alloys,

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
ED 0304	3.0	8	50	4
ED 0404	4.0	11	50	4
ED 0506	5.0	13	50	6
ED 0606	6.0	16	50	6
ED 0808	8.0	20	60	8
ED 1010	10.0	25	75	10
ED 1212	12.0	30	75	12
ED 1616	16.0	40	100	16

E EFFICIENCY MILLS

ELA

For HRC55 Steels / 2 Flute / Long Shank / Square

MG 2 35° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.239

P K



• FEATURES

- Long Shank 2 Flute Square for up to HRC55.
- Extended overall length for greater depth of cut.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
ELA 0606	6.0	15	75	6
ELA 0606A	6.0	15	100	6
ELA 0808	8.0	20	100	8
ELA 1010	10.0	25	100	10
ELA 1010A	10.0	25	150	10
ELA 1212	12.0	30	100	12
ELA 1212A	12.0	30	150	12


E EFFICIENCY MILLS

ELB

MG 4 35° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.239

For HRC55 Steels / 4 Flute / Long Shank / Square

P K

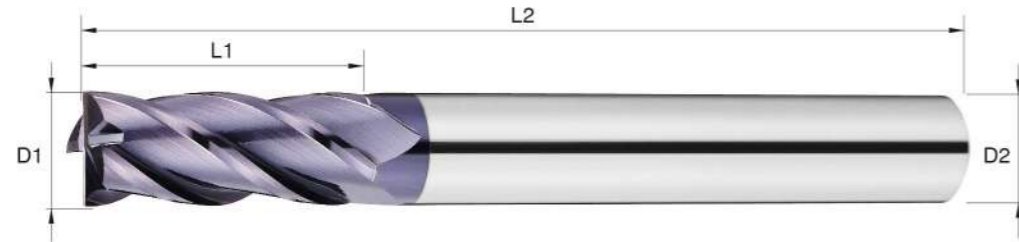

• FEATURES

- Long Shank 4 Flute Square for up to HRC55.
- Extended overall length for greater depth of cut.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
ELB 0303	3.0	8	75	3
ELB 0404	4.0	11	75	4
ELB 0606	6.0	15	75	6
ELB 0606A	6.0	15	100	6
ELB 0808	8.0	20	100	8
ELB 1010	10.0	25	100	10
ELB 1010A	10.0	25	150	10
ELB 1212	12.0	30	100	12
ELB 1212A	12.0	30	150	12
ELB 1616	16.0	40	150	16


E EFFICIENCY MILLS

ELC

MG 2 35° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.240

For HRC55 Steels / 2 Flute / Long Flute / Square

P K

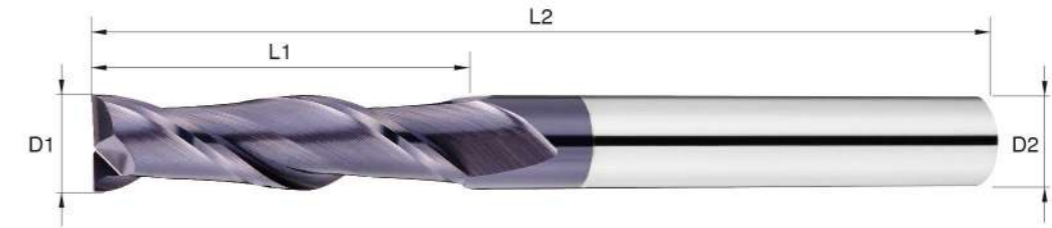

• FEATURES

- Long flute 2 Flute Square for up to HRC55.
- Extended flute length (L1) suitable for deep side milling.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
ELC 0204	2.0	12	50	4
ELC 0304	3.0	20	50	4
ELC 0404	4.0	25	75	4
ELC 0506	5.0	30	75	6
ELC 0606	6.0	30	75	6
ELC 0808	8.0	40	100	8
ELC 1010	10.0	40	100	10
ELC 1212	12.0	45	100	12


E EFFICIENCY MILLS

ELD

For HRC55 Steels / 4 Flute / Long Flute / Square

MG 4 35° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.240

P K

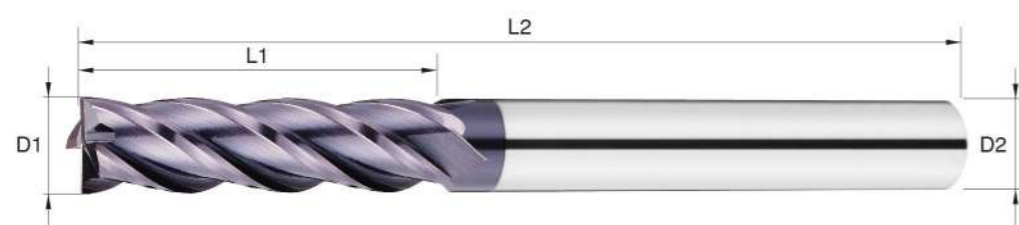

• FEATURES

- Long flute 4 Flute Square for up to HRC55.
- Extended flute length (L1) suitable for deep side milling.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
ELD 0204	2.0	15	50	4
ELD 0304	3.0	20	50	4
ELD 0404	4.0	25	75	4
ELD 0506	5.0	30	75	6
ELD 0606	6.0	30	75	6
ELD 0808	8.0	40	100	8
ELD 1010	10.0	40	100	10
ELD 1212	12.0	45	100	12
ELD 1616	16.0	60	150	16
ELD 2020	20.0	60	150	20


E EFFICIENCY MILLS

EH

For HRC55 Steels / 6 Flute / Square

MG 6 45° HRC 55 TiAlN Finishing Cutting Data P.241

P K

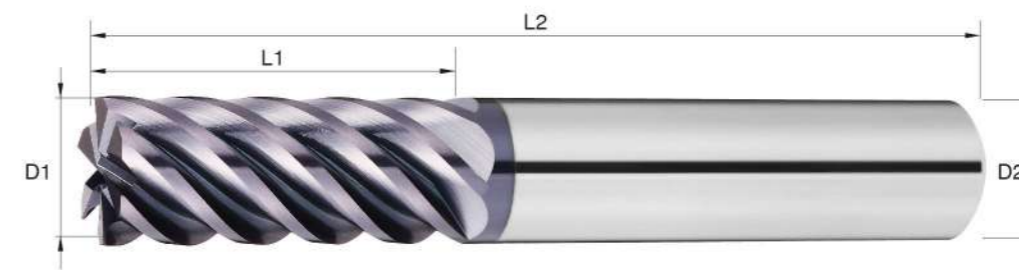

• FEATURES

- 6 Flute Square for up to HRC55.
- Suitable for side milling with great workpiece surface after finish.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
EH 0606	6.0	16	50	6
EH 0808	8.0	20	60	8
EH 1010	10.0	25	75	10
EH 1212	12.0	30	75	12
EH 1616	16.0	40	100	16
EH 2020	20.0	45	100	20


E EFFICIENCY MILLS

EHL

MG 6 45° HRC 55 TiAlN Finishing Cutting Data P.241

For HRC55 Steels / 6 Flute / Long Flute / Square

P K

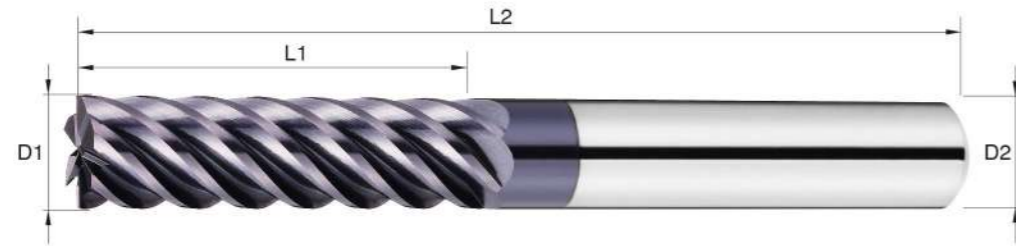

• FEATURES

- Long flute 6 Flute Square for up to HRC55.
- Extended flute length (L1) suitable for deep side milling.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
EHL 0606	6.0	24	75	6
EHL 0808	8.0	32	75	8
EHL 1010	10.0	40	100	10
EHL 1212	12.0	45	100	12
EHL 1616	16.0	64	150	16
EHL 2020	20.0	75	150	20


E EFFICIENCY MILLS

EG

MG 3 Fine 45° HRC 55 TiAlN Roughing Cutting Data P.242

For HRC55 Steels / 3 Flute / Roughing / Square

P K

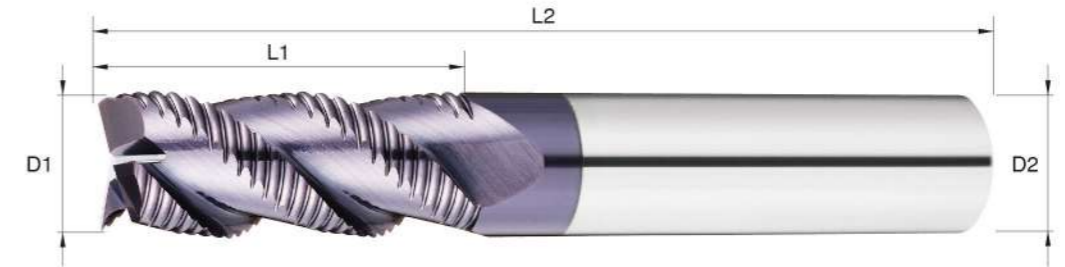

• FEATURES

- Roughing 3 Flute Square for up to HRC55.
- Chip breaker design dedicated to excellent chip removal.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
EG 0606	6.0	16	50	6
EG 0808	8.0	20	60	8
EG 1010	10.0	25	75	10
EG 1212	12.0	30	75	12
EG 1616	16.0	40	100	16
EG 2020	20.0	45	100	20


E EFFICIENCY MILLS

EGA

MG 4 Fine 35° HRC 55 TiAlN Roughing Cutting Data P.242

For HRC55 Steels / 4 Flute / Roughing / Square

P K

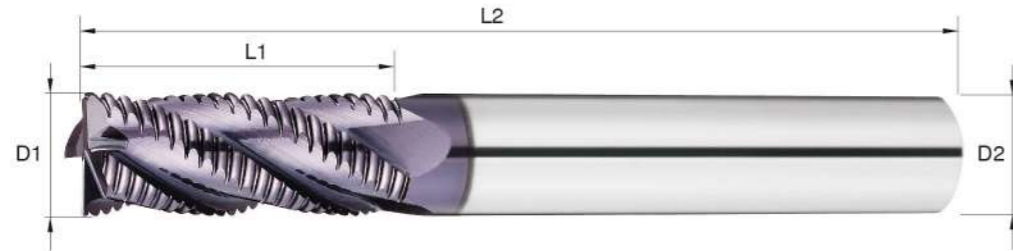

• FEATURES

- Roughing 4 Flute Square for up to HRC55.
- Chip breaker design dedicated to excellent chip removal.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
EGA 0606	6.0	16	50	6
EGA 0808	8.0	20	60	8
EGA 1010	10.0	25	75	10
EGA 1212	12.0	30	75	12
EGA 1616	16.0	40	100	16
EGA 2020	20.0	45	100	20


E EFFICIENCY MILLS

ETL

MG 2 35° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.242

For HRC55 Steels / 2 Flute / Long Flute . Taper

P K

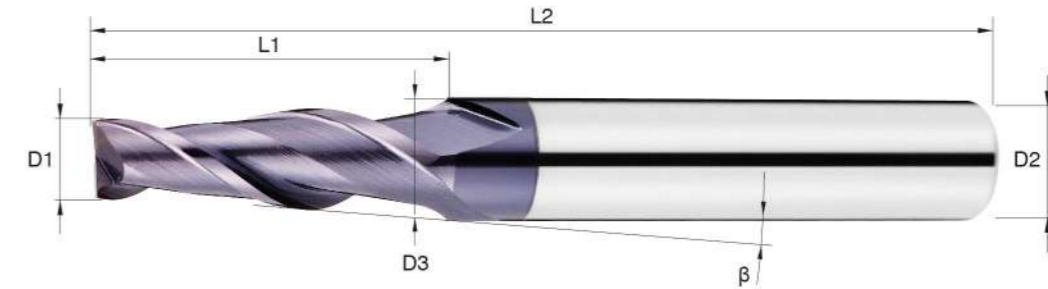

• FEATURES

- Long flute 2 Flute Taper End for up to HRC55.
- Suitable for deep inclined surface milling.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Small Mill Dia D1	Flute Length L1	Taper Angle β	Large Mill Dia D3	O.A.L. L2	Shank Dia D2
ETL 01005	1.0	10	30'	1.17	50	4
ETL 01010	1.0	10	1°	1.35	50	4
ETL 01015	1.0	10	1° 30'	1.52	50	4
ETL 01020	1.0	10	2°	1.70	50	4
ETL 01025	1.0	10	2° 30'	1.87	50	4
ETL 01030	1.0	10	3°	2.05	50	4
ETL 01050	1.0	10	5°	2.74	50	4
ETL 01070	1.0	10	7°	3.44	50	4
ETL 01505	1.5	10	30'	1.67	50	4
ETL 01510	1.5	10	1°	1.87	50	4
ETL 01515	1.5	10	1° 30'	2.02	50	4
ETL 01520	1.5	10	2°	2.20	50	4
ETL 01525	1.5	10	2° 30'	2.37	50	4
ETL 01530	1.5	10	3°	2.55	50	4
ETL 02005	2.0	13	30'	2.22	50	4
ETL 02010	2.0	13	1°	2.45	50	4
ETL 02015	2.0	13	1° 30'	2.68	50	4
ETL 02020	2.0	13	2°	2.90	50	4
ETL 02025	2.0	13	2° 30'	3.13	50	4
ETL 02030	2.0	13	3°	3.36	50	4
ETL 02050	2.0	13	5°	4.27	50	6
ETL 02505	2.5	15	30'	2.76	50	4
ETL 02510	2.5	15	1°	3.03	50	4
ETL 02515	2.5	15	1° 30'	3.29	50	4
ETL 02520	2.5	15	2°	3.56	50	4
ETL 02525	2.5	15	2° 30'	3.81	50	4
ETL 02530	2.5	15	3°	4.07	50	6
ETL 02550	2.5	15	5°	5.13	50	6
ETL 03005	3.0	20	30'	3.35	60	6
ETL 03010	3.0	20	1°	3.70	60	6
ETL 03015	3.0	20	1° 30'	4.05	60	6
ETL 03020	3.0	20	2°	4.39	60	6
ETL 03025	3.0	20	2° 30'	4.65	60	6
ETL 03030	3.0	20	3°	5.10	60	6
ETL 03050	3.0	20	5°	6.50	60	8
ETL 04005	4.0	25	30'	4.44	60	6
ETL 04010	4.0	25	1°	4.88	60	6
ETL 04015	4.0	25	1° 30'	5.13	60	6
ETL 04020	4.0	25	2°	5.75	60	6
ETL 04025	4.0	25	2° 30'	6.19	60	8
ETL 04030	4.0	25	3°	6.62	60	8
ETL 04050	4.0	25	5°	8.38	75	10


E EFFICIENCY MILLS

ET

MG
2
35°
HRC 55
TiAlN
Finishing Semi-Finishing
Cutting Data P.242

For HRC55 Steels / 2 Flute / Taper Flute

P
K

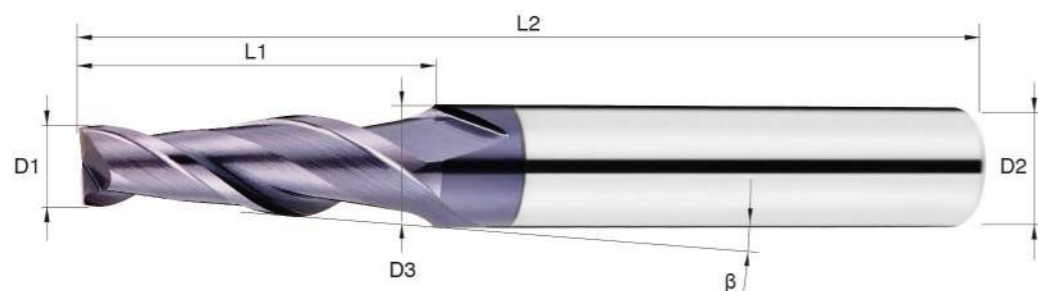

• FEATURES

- 2 Flute Taper End for up to HRC55.
- Suitable for inclined surface milling.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Small Mill Dia D1	Flute Length L1	Taper Angle β	Large Mill Dia D3	O.A.L. L2	Shank Dia D2
ET 005005	0.5	2	30'	0.53	50	4
ET 005010	0.5	2	1°	0.57	50	4
ET 005015	0.5	2	1° 30'	0.60	50	4
ET 005020	0.5	2	2°	0.64	50	4
ET 005025	0.5	2	2° 30'	0.67	50	4
ET 005030	0.5	2	3°	0.71	50	4
ET 005050	0.5	2	5°	0.85	50	4
ET 005070	0.5	2	7°	0.99	50	4
ET 005100	0.5	2	10°	1.21	50	4
ET 010005	1.0	4	30'	1.07	50	4
ET 010010	1.0	4	1°	1.14	50	4
ET 010015	1.0	4	1° 30'	1.21	50	4
ET 010020	1.0	4	2°	1.28	50	4
ET 010025	1.0	4	2° 30'	1.35	50	4
ET 010030	1.0	4	3°	1.42	50	4
ET 010050	1.0	4	5°	1.70	50	4
ET 010070	1.0	4	7°	1.98	50	4
ET 010100	1.0	4	10°	2.41	50	4
ET 015005	1.5	5	30'	1.59	50	4
ET 015010	1.5	5	1°	1.67	50	4
ET 015015	1.5	5	1° 30'	1.76	50	4
ET 015020	1.5	5	2°	1.85	50	4
ET 015025	1.5	5	2° 30'	1.93	50	4
ET 015030	1.5	5	3°	2.02	50	4
ET 015050	1.5	5	5°	2.37	50	4
ET 015070	1.5	5	7°	2.72	50	4
ET 015100	1.5	5	10°	3.26	50	4
ET 020005	2.0	6	30'	2.10	50	4
ET 020010	2.0	6	1°	2.21	50	4
ET 020015	2.0	6	1° 30'	2.31	50	4
ET 020020	2.0	6	2°	2.41	50	4
ET 020025	2.0	6	2° 30'	2.52	50	4
ET 020030	2.0	6	3°	2.62	50	4
ET 020050	2.0	6	5°	3.05	50	4
ET 020070	2.0	6	7°	3.47	50	4
ET 020100	2.0	6	10°	4.11	50	4
ET 025005	2.5	8	30'	2.64	50	4
ET 025010	2.5	8	1°	2.78	50	4
ET 025015	2.5	8	1° 30'	2.91	50	4
ET 025020	2.5	8	2°	3.05	50	4

Order No.	Small Mill Dia D1	Flute Length L1	Taper Angle β	Large Mill Dia D3	O.A.L. L2	Shank Dia D2
ET 025025	2.5	8	2° 30'	3.20	50	4
ET 025030	2.5	8	3°	3.33	50	4
ET 025050	2.5	8	5°	3.90	50	4
ET 025070	2.5	8	7°	4.46	50	6
ET 025100	2.5	8	10°	5.32	50	6
ET 030005	3.0	10	30'	3.17	50	6
ET 030010	3.0	10	1°	3.35	50	6
ET 030015	3.0	10	1° 30'	3.52	50	6
ET 030020	3.0	10	2°	3.69	50	6
ET 030025	3.0	10	2° 30'	3.87	50	6
ET 030030	3.0	10	3°	4.05	50	6
ET 030050	3.0	10	5°	4.75	50	6
ET 030070	3.0	10	7°	5.46	50	6
ET 030100	3.0	10	10°	6.53	60	8
ET 040005	4.0	15	30'	4.26	50	6
ET 040010	4.0	15	1°	4.52	50	6
ET 040015	4.0	15	1° 30'	4.79	50	6
ET 040020	4.0	15	2°	5.04	50	6
ET 040025	4.0	15	2° 30'	5.31	50	6
ET 040030	4.0	15	3°	5.57	50	6
ET 040050	4.0	15	5°	6.62	60	8
ET 040070	4.0	15	7°	7.68	60	8
ET 050005	5.0	20	30'	5.34	60	6
ET 050010	5.0	20	1°	5.70	60	6
ET 050015	5.0	20	1° 30'	6.04	60	8
ET 050020	5.0	20	2°	6.39	60	8
ET 050025	5.0	20	2° 30'	6.74	60	8
ET 050030	5.0	20	3°	7.10	60	8
ET 050050	5.0	20	5°	8.50	75	10
ET 050070	5.0	20	7°	9.91	75	10
ET 060005	6.0	20	30'	6.35	60	8
ET 060010	6.0	20	1°	6.70	60	8
ET 060015	6.0	20	1° 30'	7.05	60	8
ET 060020	6.0	20	2°	7.40	60	8
ET 060025	6.0	20	2° 30'	7.75	60	8
ET 060030	6.0	20	3°	8.10	60	8
ET 060050	6.0	20	5°	9.50	75	10
ET 080005	8.0	25	30'	8.44	75	10
ET 080010	8.0	25	1°	8.87	75	10
ET 080015	8.0	25	1° 30'	9.31	75	10
ET 080020	8.0	25	2°	9.74	75	10
ET 080025	8.0	25	2° 30'	10.18	75	12
ET 080030	8.0	25	3°	10.62	75	12
ET 080050	8.0	25	5°	12.37	100	16
ET 100005	10.0	35	30'	10.61	100	12
ET 100010	10.0	35	1°	11.22	100	12
ET 100015	10.0	35	1° 30'	11.83	100	12
ET 100020	10.0	35	2°	12.44	100	16
ET 100025	10.0	35	2° 30'	13.06	100	16
ET 100030	10.0	35	3°	13.67	100	16
ET 100050	10.0	35	5°	16.12	100	16


E EFFICIENCY MILLS

ERA

MG 2 35° R HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.242

For HRC55 Steels / 2 Flute / Corner Radius

P K

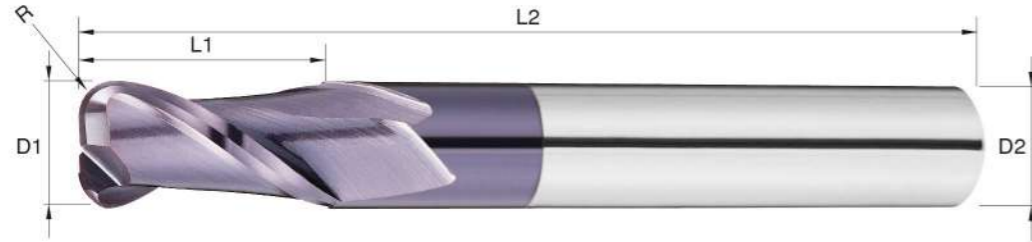

• FEATURES

- 2 Flute Corner Radius for up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

Order No.	unit: mm				
	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
ERA 0302	3.0	0.2	6	50	3
ERA 0305	3.0	0.5	6	50	3
ERA 0402	4.0	0.2	8	50	4
ERA 0405	4.0	0.5	8	50	4
ERA 0410	4.0	1.0	8	50	4
ERA 0602	6.0	0.2	12	50	6
ERA 0605	6.0	0.5	12	50	6
ERA 0610	6.0	1.0	12	50	6
ERA 0615	6.0	1.5	12	50	6
ERA 0620	6.0	2.0	12	50	6
ERA 0803	8.0	0.3	16	60	8
ERA 0805	8.0	0.5	16	60	8
ERA 0810	8.0	1.0	16	60	8
ERA 0815	8.0	1.5	16	60	8
ERA 0820	8.0	2.0	16	60	8
ERA 1005	10.0	0.5	20	75	10
ERA 1010	10.0	1.0	20	75	10
ERA 1015	10.0	1.5	20	75	10
ERA 1020	10.0	2.0	20	75	10
ERA 1030	10.0	3.0	20	75	10
ERA 1205	12.0	0.5	24	75	12
ERA 1210	12.0	1.0	24	75	12
ERA 1215	12.0	1.5	24	75	12
ERA 1220	12.0	2.0	24	75	12
ERA 1230	12.0	3.0	24	75	12


E EFFICIENCY MILLS

ERB

MG 4 35° R HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.243

For HRC55 Steels / 4 Flute / Corner Radius

P K

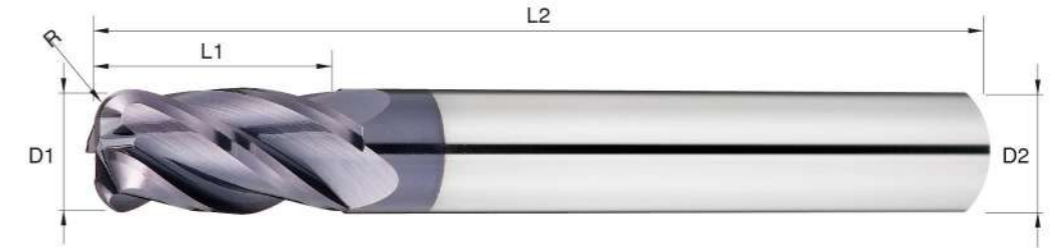

• FEATURES

- 4 Flute Corner Radius for up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

Order No.	unit: mm				
	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
ERB 0302	3.0	0.2	6	50	3
ERB 0302.4	3.0	0.2	6	50	4
ERB 0305	3.0	0.5	6	50	3
ERB 0305.4	3.0	0.5	6	50	4
ERB 0310	3.0	1.0	6	50	3
ERB 0310.4	3.0	1.0	6	50	4
ERB 0402	4.0	0.2	8	50	4
ERB 0405	4.0	0.5	8	50	4
ERB 0410	4.0	1.0	8	50	4
ERB 0602	6.0	0.2	12	50	6
ERB 0605	6.0	0.5	12	50	6
ERB 0610	6.0	1.0	12	50	6
ERB 0615	6.0	1.5	12	50	6
ERB 0620	6.0	2.0	12	50	6
ERB 0803	8.0	0.3	16	60	8
ERB 0805	8.0	0.5	16	60	8
ERB 0810	8.0	1.0	16	60	8
ERB 0815	8.0	1.5	16	60	8
ERB 0820	8.0	2.0	16	60	8
ERB 1005	10.0	0.5	20	75	10
ERB 1010	10.0	1.0	20	75	10
ERB 1015	10.0	1.5	20	75	10
ERB 1020	10.0	2.0	20	75	10
ERB 1030	10.0	3.0	20	75	10
ERB 1205	12.0	0.5	24	75	12
ERB 1210	12.0	1.0	24	75	12
ERB 1215	12.0	1.5	24	75	12
ERB 1220	12.0	2.0	24	75	12
ERB 1230	12.0	3.0	24	75	12


E EFFICIENCY MILLS

ERC

MG 4 35° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.243

For HRC55 Steels / 4 Flute / Long Shank Corner Radius

P K

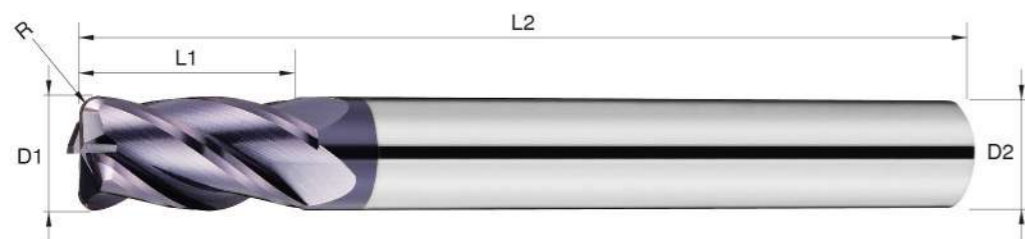

• FEATURES

- Long shank 4 Flute Corner Radius for up to HRC55.
- Extended overall length for greater depth of cut.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
ERC 0605	6.0	0.5	12	75	6
ERC 0605A	6.0	0.5	12	100	6
ERC 0610	6.0	1.0	12	75	6
ERC 0610A	6.0	1.0	12	100	6
ERC 0805	8.0	0.5	16	100	8
ERC 0810	8.0	1.0	16	100	8
ERC 1005	10.0	0.5	20	100	10
ERC 1010	10.0	1.0	20	100	10
ERC 1020	10.0	2.0	20	100	10
ERC 1205	12.0	0.5	24	100	12
ERC 1210	12.0	1.0	24	100	12
ERC 1220	12.0	2.0	24	100	12


E EFFICIENCY MILLS

BF

MG 2 30° HRC 55 TiAlN Finishing Semi-Finishing Cutting Data P.243

For HRC55 Steels / 2 Flute / Long Neck / Ball Nose

P K

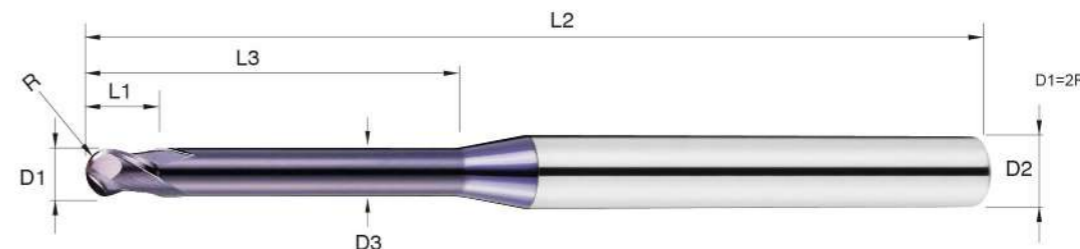

• FEATURES

- Long neck 2 Flute Ball Nose for up to HRC55.
- R0.5~R2.0 mm with effective length 6~30 mm excellent for rib milling.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
BF 01006	R0.5	0.95	2	6	50	4
BF 01008	R0.5	0.95	2	8	50	4
BF 01010	R0.5	0.95	2	10	50	4
BF 01012	R0.5	0.95	2	12	50	4
BF 01508	R0.75	1.45	3	8	50	4
BF 01510	R0.75	1.45	3	10	50	4
BF 01512	R0.75	1.45	3	12	50	4
BF 01516	R0.75	1.45	3	16	50	4
BF 01520	R0.75	1.45	3	20	50	4
BF 02008	R1.0	1.92	4	8	50	4
BF 02010	R1.0	1.92	4	10	50	4
BF 02012	R1.0	1.92	4	12	50	4
BF 02016	R1.0	1.92	4	16	50	4
BF 02020	R1.0	1.92	4	20	50	4
BF 03008	R1.5	2.90	6	8	50	6
BF 03010	R1.5	2.90	6	10	50	6
BF 03012	R1.5	2.90	6	12	50	6
BF 03016	R1.5	2.90	6	16	50	6
BF 03020	R1.5	2.90	6	20	75	6
BF 03025	R1.5	2.90	6	25	75	6
BF 04012	R2.0	3.88	8	12	50	6
BF 04016	R2.0	3.88	8	16	50	6
BF 04020	R2.0	3.88	8	20	50	6
BF 04025	R2.0	3.88	8	25	75	6
BF 04030	R2.0	3.88	8	30	75	6


E EFFICIENCY MILLS

EFA

MG
2
35°
HRC 55
TiAlN
Finishing Semi-Finishing
Cutting Data P.243

For HRC55 Steels / 2 Flute / Long Neck / Square

P
K

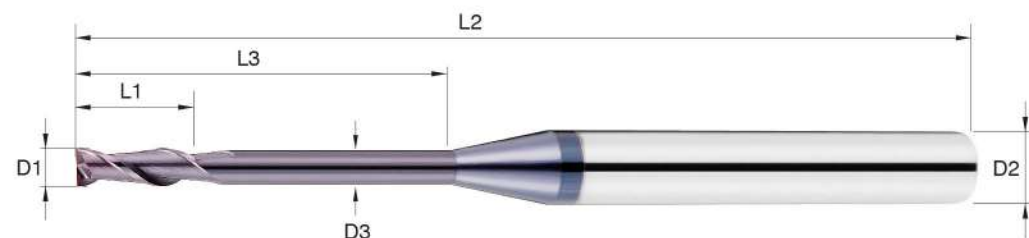


• FEATURES

- Long neck 2 Flute Square for up to HRC55.
- Dia 1.0~3.0 mm with effective length 6~25 mm excellent for rib milling.
- TiAlN Coating for General steel.

• ITEMS

unit: mm

Order No.	Diameter D1	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
EFA 01006	1.0	0.95	3	6	50	4
EFA 01008	1.0	0.95	3	8	50	4
EFA 01010	1.0	0.95	3	10	50	4
EFA 01012	1.0	0.95	3	12	50	4
EFA 01508	1.5	1.45	4	8	50	4
EFA 01510	1.5	1.45	4	10	50	4
EFA 01512	1.5	1.45	4	12	50	4
EFA 01516	1.5	1.45	4	16	50	4
EFA 02008	2.0	1.92	6	8	50	4
EFA 02010	2.0	1.92	6	10	50	4
EFA 02012	2.0	1.92	6	12	50	4
EFA 02016	2.0	1.92	6	16	50	4
EFA 02020	2.0	1.92	6	20	50	4
EFA 02510	2.5	2.40	8	10	50	4
EFA 02512	2.5	2.40	8	12	50	4
EFA 02516	2.5	2.40	8	16	50	4
EFA 02520	2.5	2.40	8	20	50	4
EFA 03010	3.0	2.90	8	10	50	6
EFA 03012	3.0	2.90	8	12	50	6
EFA 03016	3.0	2.90	8	16	50	6
EFA 03020	3.0	2.90	8	20	75	6
EFA 03025	3.0	2.90	8	25	75	6

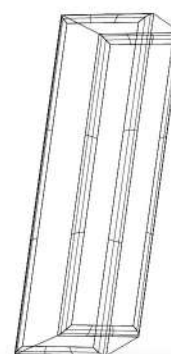


TITANIUM & STAINLESS CUTTING SERIES

l.pro

SBBIV

Titanium & Stainless cutting series / 4 Flute / Ball Nose

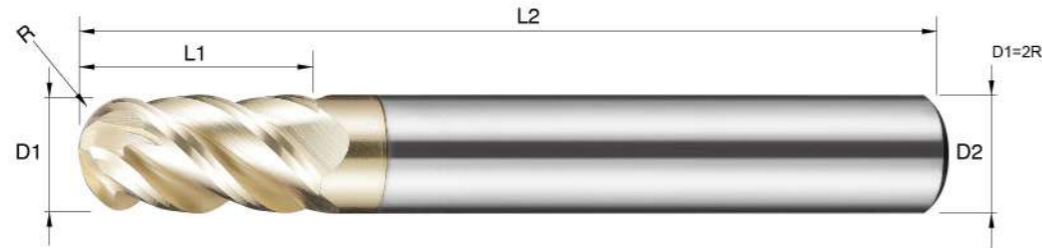

• FEATURES

- 4 Flute Ball Nose for Stainless Steel, Titanium alloys, and High temp. alloy.
- Superior performance at high feed cutting compared to regular 4-flute design.
- G-plus Coating: Excellent wear resistance and heat resistant.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
SBBIV 0306	R1.5	6	50	6
SBBIV 0406	R2	8	50	6
SBBIV 0506	R2.5	10	50	6
SBBIV 0606	R3	12	50	6
SBBIV 0808	R4	16	60	8
SBBIV 1010	R5	20	75	10
SBBIV 1212	R6	24	75	12

unit: mm

• discontinuation


SBBI Product Series with G300 coating will be discontinued after Dec. 2024. We will continue to ship SBBI orders until our inventory is depleted. If you'd like to purchase SBBI products, please contact your HGT sales representative while stocks last. The replacement of SBBI is SBBIV Product Series, which is original SBBI with new coating G-plus.

SBBI



SIBTR

Titanium & Stainless cutting series / 4 Flute / Taper Barrel Type

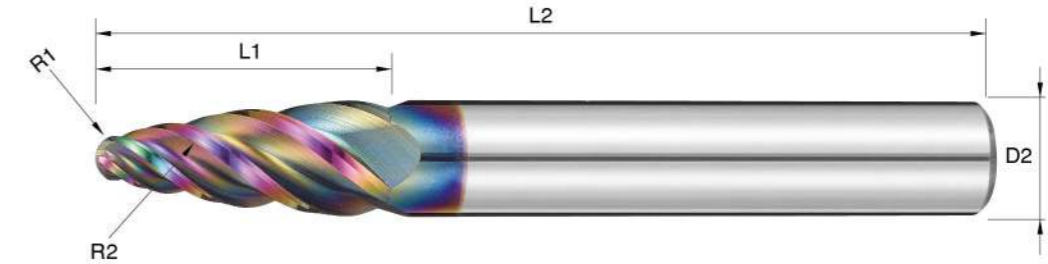

• FEATURES


- 4 Flute Barrel Type for Stainless Steel, Titanium & Ti alloys, and High temp. alloy.
- Larger radius edge in the cutting area together with multi-flute design brings higher milling efficiency.
- Compared to ball nose end mills, Barrel Type has wider ap stepover to reduce machining time.
- Lower cusp height Improves surface finish.
- G-X Coating: Excellent wear resistance and heat resistant.

• ITEMS


Order No.	Radius R1	Radius R2	Flute Length L1	O.A.L. L2	Shank Dia D2
SIBTR 1010D06	R1.0	R100	20.5	75	6
SIBTR 15095D08	R1.5	R95	22.0	75	8
SIBTR 20090D10	R2.0	R90	24.5	100	10
SIBTR 20085D12	R2.0	R85	27.0	100	12

unit: mm

Standard Type



Barrel Type




SEIV

Titanium & Stainless cutting series / 4 Flute / Square

S 4 45° G-plus Finishing Cutting
MG 4 45° G-plus Semi-Finishing Data
P.244

M S 3 45° HELICA Roughing Finishing Cutting
M S 3 45° HELICA Semi-Finishing Data
P.244

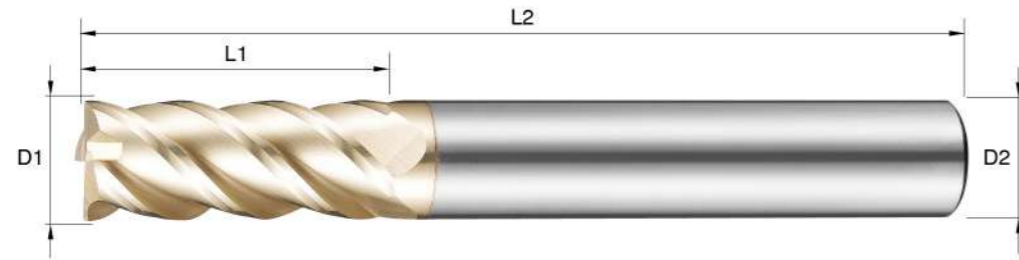

• FEATURES

- 4 Flute Square for Stainless Steel, Titanium alloys, and High temp. alloy.
- G-plus Coating: Excellent wear resistance and heat resistant.

• ITEMS


Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SEIV 0306	3.0	8	50	6
SEIV 0406	4.0	11	50	6
SEIV 0506	5.0	13	50	6
SEIV 0606	6.0	16	50	6
SEIV 0808	8.0	20	60	8
SEIV 1010	10.0	25	75	10
SEIV 1212	12.0	30	75	12
SEIV 1616	16.0	40	100	16
SEIV 2020	20.0	45	100	20

SEPS

Titanium & Stainless cutting series / 3 Flute / Square

S 3 45° HELICA Roughing Finishing Cutting
MG 3 45° HELICA Semi-Finishing Data
P.244

M S 3 45° HELICA Roughing Finishing Cutting
M S 3 45° HELICA Semi-Finishing Data
P.244

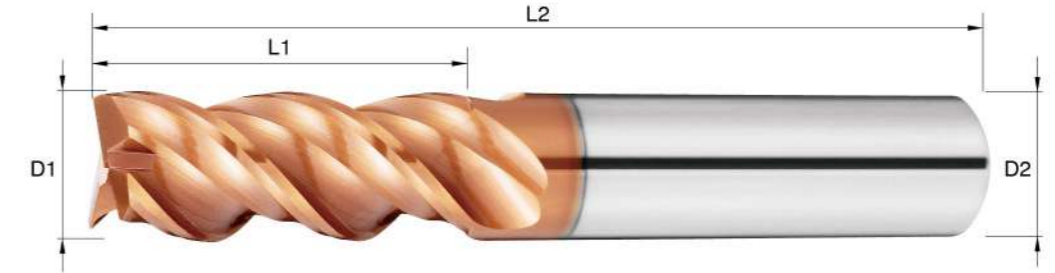

• FEATURES

- Roughing 3 Flute Square for Stainless Steel, Titanium alloys, and High temp. alloy.
- 45 ° Helix angle and large, wide gullet make smooth & fast chip removal possible.
- HELICA Coating for general steels; wet cutting.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SEPS 0306	3.0	8	50	6
SEPS 0406	4.0	11	50	6
SEPS 0506	5.0	13	50	6
SEPS 0606	6.0	16	50	6
SEPS 0808	8.0	20	60	8
SEPS 1010	10.0	25	75	10
SEPS 1212	12.0	30	75	12
SEPS 1616	16.0	40	100	16
SEPS 2020	20.0	45	100	20

SEI




• discontinuation

SEI Product Series with G300 coating will be discontinued after Dec. 2024. We will continue to ship SEI orders until our inventory is depleted. If you'd like to purchase SEI products, please contact your HGT sales representative while stocks last. The replacement of SEI is SEIV Product Series, which is original SEI with new coating G-plus.

SEPIV

Titanium & Stainless cutting series / 4 Flute / Square

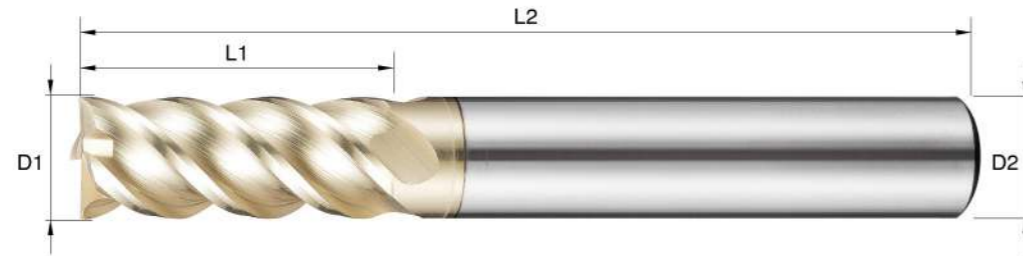

• FEATURES


- Roughing 4 Flute Square for Stainless Steel, Titanium alloys, and High temp. alloy.
- 45 ° Helix angle and large, wide gullet make smooth & fast chip removal possible.
- G-plus Coating: Excellent wear resistance and heat resistant.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SEPIV 0306	3.0	8	50	6
SEPIV 0406	4.0	11	50	6
SEPIV 0506	5.0	13	50	6
SEPIV 0606	6.0	16	50	6
SEPIV 0808	8.0	20	60	8
SEPIV 1010	10.0	25	75	10
SEPIV 1212	12.0	30	75	12
SEPIV 1616	16.0	40	100	16
SEPIV 2020	20.0	45	100	20

SIBV

Titanium & Stainless cutting series / 5 Flute / Square

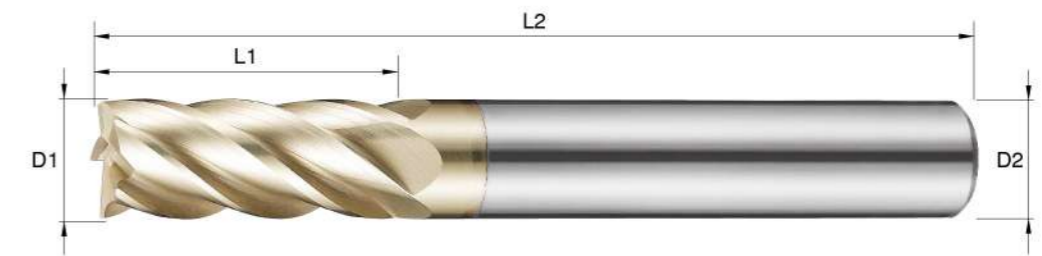

• FEATURES

- 5 Flute Square for Stainless Steel, Titanium & Ti alloys, and High temp. alloy.
- 37 ° Helix angle and unequal flute spacing on end edge to reduce cutting force for better anti-vibration.
- G-plus Coating: Excellent wear resistance and heat resistant.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SIBV 0306	3.0	8	50	6
SIBV 0406	4.0	11	50	6
SIBV 0506	5.0	13	50	6
SIBV 0606	6.0	16	50	6
SIBV 0808	8.0	20	60	8
SIBV 1010	10.0	25	75	10
SIBV 1212	12.0	30	75	12
SIBV 1616	16.0	40	100	16
SIBV 2020	20.0	45	100	20

SEPI



• discontinuation

SEPI Product Series with G300 coating will be discontinued after Dec. 2024. We will continue to ship SEPI orders until our inventory is depleted. If you'd like to purchase SEPI products, please contact your HGT sales representative while stocks last. The replacement of SEPI is SEPIV Product Series, which is original SEPI with new coating G-plus.

SIB




• discontinuation

SIB Product Series with G300 coating will be discontinued after Dec. 2024. We will continue to ship SIB orders until our inventory is depleted. If you'd like to purchase SIB products, please contact your HGT sales representative while stocks last. The replacement of SIB is SIBV Product Series, which is original SIB with new coating G-plus.

I **I.pro**
SHAIV
 Titanium & Stainless cutting series / 6 Flute / Square

S MG 6 45° G-plus Finishing Cutting Data P.245

M S

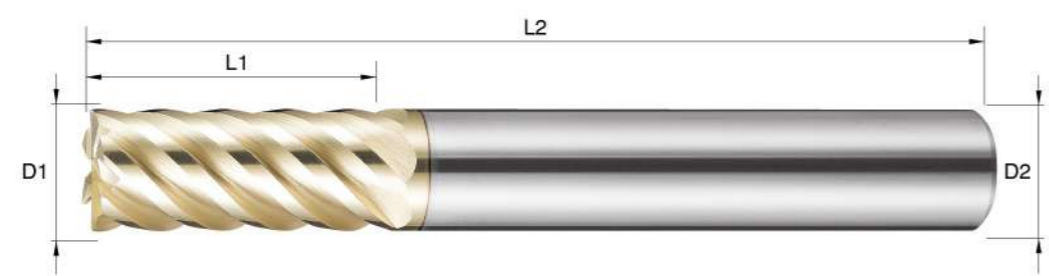

• FEATURES

- 6 Flute Square for Stainless Steel, Titanium & Ti alloys, and High temp. alloy.
- Great for side milling with excellent workpiece surface after processed.
- G-plus Coating: Excellent wear resistance and heat resistant.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SHAIV 0606	6.0	16	50	6
SHAIV 0808	8.0	20	60	8
SHAIV 1010	10.0	25	75	10
SHAIV 1212	12.0	30	75	12
SHAIV 1616	16.0	40	100	16

unit: mm

SHAI




• discontinuation

SHAI Product Series with G300 coating will be discontinued after Dec. 2024. We will continue to ship SHAI orders until our inventory is depleted. If you'd like to purchase SHAI products, please contact your HGT sales representative while stocks last. The replacement of SHAI is SHAIV Product Series, which is original SHAI with new coating G-plus.

I **I.pro**
SEGIV
 Titanium & Stainless cutting series / 4 Flute / Roughing Square

S MG 4 45° Fine G-plus Roughing Cutting Data P.246

M S

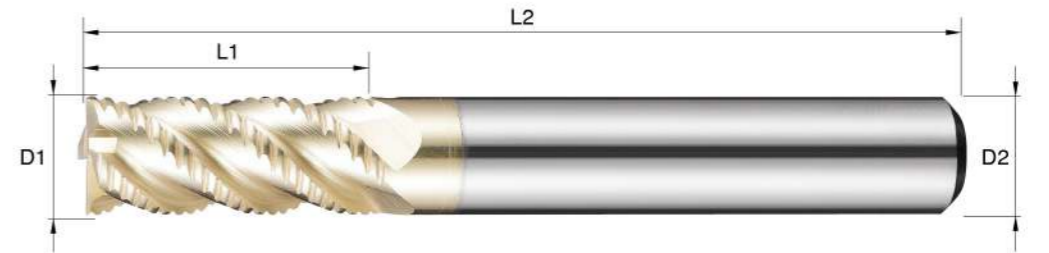

• FEATURES

- Roughing 4 Flute Square for Stainless Steel, Titanium & Ti alloys, and High temp. alloy.
- Chip breaker design dedicated to excellent chip removal ability.
- G-plus Coating: Excellent wear resistance and heat resistant.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SEGIV 0606	6.0	16	50	6
SEGIV 0808	8.0	20	60	8
SEGIV 1010	10.0	25	75	10
SEGIV 1212	12.0	30	75	12
SEGIV 1616	16.0	40	100	16
SEGIV 2020	20.0	45	100	20

unit: mm




• discontinuation

SEGI Product Series with G300 coating will be discontinued after Dec. 2024. We will continue to ship SEGI orders until our inventory is depleted. If you'd like to purchase SEGI products, please contact your HGT sales representative while stocks last. The replacement of SEGI is SEGIV Product Series, which is original SEGI with new coating G-plus.

I **I.pro**
SIGP
 Titanium & Stainless cutting series / 4 Flute / Roughing Square

S MG 4 40° α≠β G-X Finishing Semi-Finishing

M S

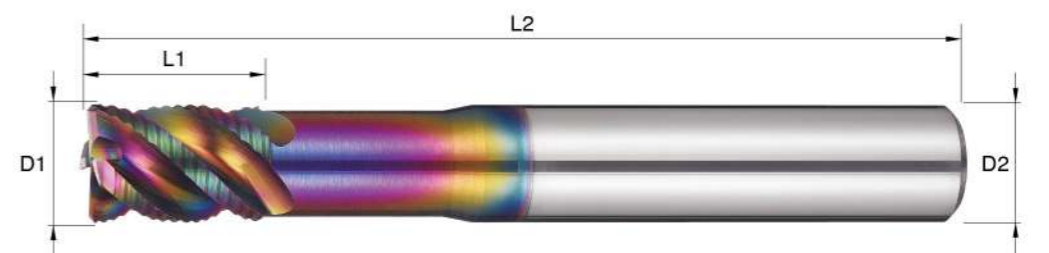

• FEATURES

- Roughing 4 Flute Square for Stainless Steel, Titanium alloys, and High temp. alloy.
- Variable helix angle and unequal flute spacing offer great stability and anti-vibration.
- G-X Coating: Excellent wear resistance and heat resistant.


• ITEMS

Order No.	Diameter D1	Chamfer C	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
SIGP 0606	6.0	0.3	9	18	50	6
SIGP 0808	8.0	0.4	12	24	60	8
SIGP 1010	10.0	0.5	15	30	75	10
SIGP 1212	12.0	0.6	18	36	75	12

unit: mm

SRIPV

Titanium & Stainless cutting series / 4 Flute / Corner Radius

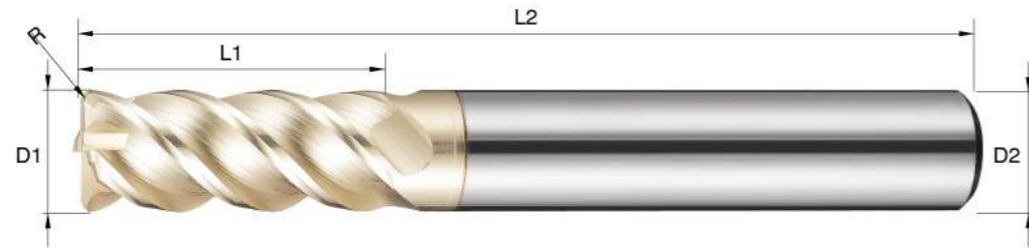

• FEATURES


- 4 Flute Corner Radius for Stainless Steel, Titanium & Ti alloys, and High temp. alloy.
- 45 ° Helix angle and large, wide gullet make smooth & fast chip removal possible.
- G-plus Coating: Excellent wear resistance and heat resistant.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
SRIPV 0305	3.0	0.5	8	50	6
SRIPV 0405	4.0	0.5	11	50	6
SRIPV 0605	6.0	0.5	16	50	6
SRIPV 0610	6.0	1.0	16	50	6
SRIPV 0805	8.0	0.5	20	60	8
SRIPV 0810	8.0	1.0	20	60	8
SRIPV 1005	10.0	0.5	25	75	10
SRIPV 1010	10.0	1.0	25	75	10
SRIPV 1205	12.0	0.5	30	75	12
SRIPV 1210	12.0	1.0	30	75	12

SIW

Titanium & Stainless cutting series / 4 Flute / Square

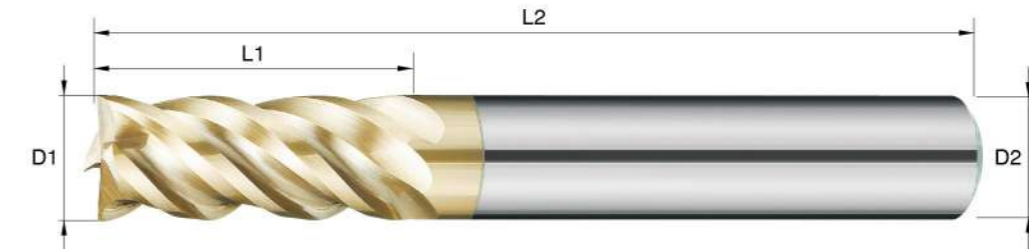

• FEATURES

- 4 Flute Square for Stainless Steel, Titanium & Ti alloys, and High temp. alloy.
- Variable helix angle and unequal flute spacing offer great stability and anti-vibration.
- G-plus Coating: Higher efficiency and longer tool life.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
SIW 0306	3.0	8	50	6
SIW 0406	4.0	11	50	6
SIW 0506	5.0	13	50	6
SIW 0606	6.0	16	50	6
SIW 0808	8.0	20	60	8
SIW 1010	10.0	25	75	10
SIW 1212	12.0	30	75	12
SIW 1616	16.0	40	100	16
SIW 2020	20.0	45	100	20

SRIP




• discontinuation

SRIP Product Series with G300 coating will be discontinued after Dec. 2024. We will continue to ship SRIP orders until our inventory is depleted. If you'd like to purchase SRIP products, please contact your HGT sales representative while stocks last. The replacement of SRIP is SRIPV Product Series, which is original SRIP with new coating G-plus.

SIWH

Titanium & Stainless cutting series / 4 Flute / Square

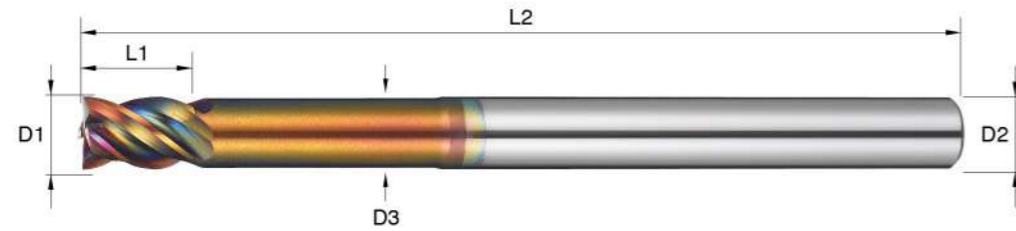

• FEATURES


- 4 Flute Square for Stainless Steel, Titanium & Ti alloys, and High temp. alloy.
- Variable helix angle and unequal flute spacing offer great stability and anti-vibration.
- G-X Coating: Excellent wear resistance and heat resistant.

• ITEMS

Order No.	Diameter D1	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	unit: mm
						Shank Dia D2
SIWH 03010	3.0	2.9	4.5	10	75	6
SIWH 03030	3.0	2.9	4.5	30	75	6
SIWH 04012	4.0	3.88	6	12	75	6
SIWH 04030	4.0	3.88	6	30	75	6
SIWH 05016	5.0	4.8	7.5	16	75	6
SIWH 05030	5.0	4.8	7.5	30	75	6
SIWH 06030	6.0	5.8	9	30	100	6
SIWH 08040	8.0	7.7	12	40	100	8
SIWH 10040	10.0	9.6	15	40	100	10
SIWH 12050	12.0	11.5	18	50	100	12

SIRW

Titanium & Stainless cutting series / 4 Flute / Corner Radius

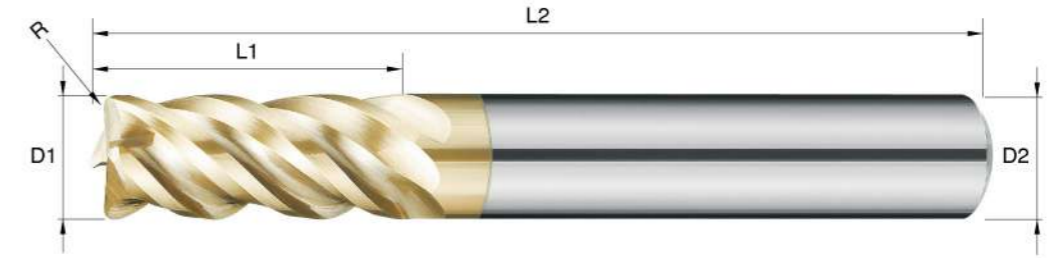

• FEATURES


- 4 Flute Corner Radius for Stainless Steel, Titanium & Ti alloys, and High temp. alloy.
- Variable helix angle and unequal flute spacing offer great stability and anti-vibration.
- G-plus Coating: Higher efficiency and longer tool life.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	unit: mm
					Shank Dia D2
SIRW 0305	3.0	0.5	7.5	50	6
SIRW 0405	4.0	0.5	10	50	6
SIRW 0605	6.0	0.5	15	50	6
SIRW 0610	6.0	1.0	15	50	6
SIRW 0805	8.0	0.5	20	60	8
SIRW 0810	8.0	1.0	20	60	8
SIRW 1005	10.0	0.5	25	75	10
SIRW 1010	10.0	1.0	25	75	10
SIRW 1205	12.0	0.5	30	75	12
SIRW 1210	12.0	1.0	30	75	12

SIRWH

Titanium & Stainless cutting series / 4 Flute / Corner Radius

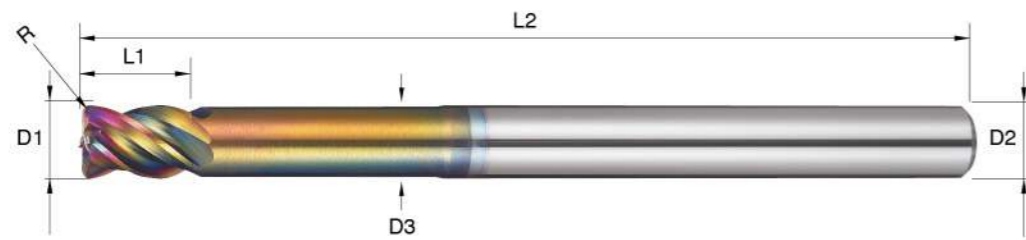

• FEATURES



- 4 Flute Corner Radius for Stainless Steel, Titanium & Ti alloys, and High temp. alloy.
- Variable helix angle and unequal flute spacing offer great stability and anti-vibration.
- G-X Coating: Excellent wear resistance and heat resistant.

• ITEMS

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	unit: mm
							Shank Dia D2
SIRWH 0305-10	3.0	0.5	2.9	4.5	10	75	6
SIRWH 0305-30	3.0	0.5	2.9	4.5	30	75	6
SIRWH 0405-12	4.0	0.5	3.88	6	12	75	6
SIRWH 0405-30	4.0	0.5	3.88	6	30	75	6
SIRWH 0605-30	6.0	0.5	5.8	9	30	100	6
SIRWH 0610-30	6.0	1	5.8	9	30	100	6
SIRWH 0805-40	8.0	0.5	7.7	12	40	100	8
SIRWH 0810-40	8.0	1	7.7	12	40	100	8
SIRWH 1005-40	10.0	0.5	9.6	15	40	100	10
SIRWH 1010-40	10.0	1	9.6	15	40	100	10
SIRWH 1205-50	12.0	0.5	11.5	18	50	100	12
SIRWH 1210-50	12.0	1	11.5	18	50	100	12

SIW5D

Titanium & Stainless cutting series / 4 Flute / Long Flute / Square

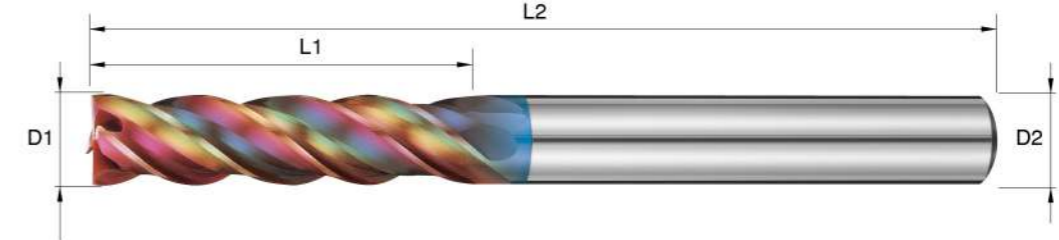


• FEATURES

- 4 Flute Square for Stainless Steel, Titanium & Ti alloys, and High temp. alloy.
- Variable helix angle and unequal flute spacing offer great stability and anti-vibration.
- 5D extended flute length(L1) suitable for deep side milling.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	unit: mm
				Shank Dia D2
SIW5D 0406	4.0	21	60	6
SIW5D 0506	5.0	26	60	6
SIW5D 0606	6.0	31	70	6
SIW5D 0808	8.0	41	90	8
SIW5D 1010	10.0	51	100	10
SIW5D 1212	12.0	61	110	12
SIW5D 1616	16.0	81	160	16
SIW5D 2020	20.0	101	200	20

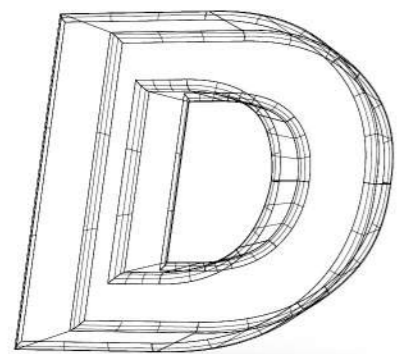

ALUMINUM & COPPER CUTTING SERIES

D MILL

D D MILL

DBTR



Aluminum & Copper cutting series / 4 Flute / Taper Barrel Type




FEATURES

- 4 Flute Barrel Type for Aluminum.
- Larger radius edge in the cutting area together with multi-flute design brings higher milling efficiency.
- Compared to ball nose end mills, Barrel Type has wider ap stepover to reduce machining time.
- Lower cusp height Improves surface finish.
- D-X Coating: Excellent wear resistance and heat resistant.


ITEMS

Order No.	Radius		Flute Length L1	O.A.L. L2	unit: mm
	R1	R2			Shank Dia D2
DBTR 10100D06	R1.0	R100	20.5	75	6
DBTR 15095D08	R1.5	R95	22.0	75	8
DBTR 20090D10	R2.0	R90	24.5	100	10
DBTR 20085D12	R2.0	R85	27.0	100	12

Standard Type



Barrel Type




D D MILL

DB



Aluminum & Copper cutting series / 2 Flute / Ball Nose

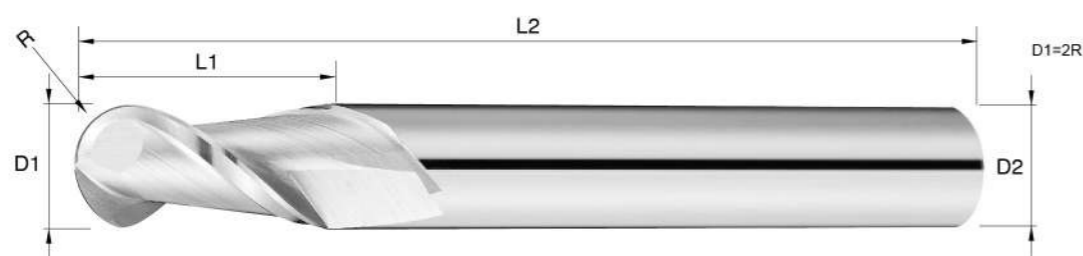

• FEATURES

- 2 Flute Ball Nose for Aluminum.
- Helix Angle(Degrees): 45
- Profiling.

• ITEMS


Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
DB 0104	R0.5	3	50	4
DB 0154	R0.75	4	50	4
DB 0204	R1	6	50	4
DB 0303	R1.5	6	50	3
DB 0404	R2	8	50	4
DB 0606	R3	12	50	6
DB 0808	R4	16	60	8
DB 1010	R5	20	75	10
DB 1212	R6	24	75	12

D D MILL

DESV



Aluminum & Copper cutting series / 2 Flute / Square

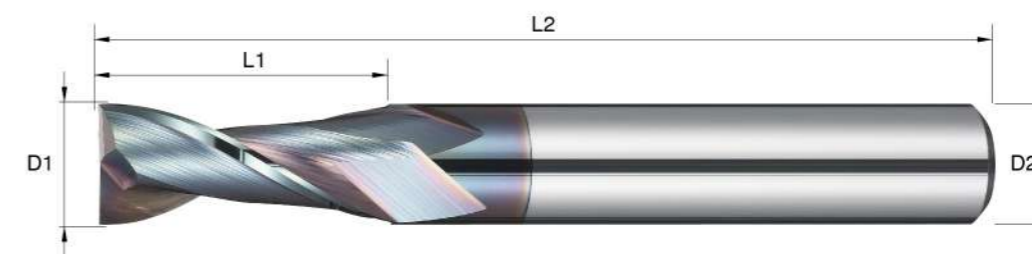

• FEATURES

- 2 Flute Square for Aluminum.
- Fine & bright workpiece surface after processed.
- D-X Coating: Excellent wear resistance and heat resistant.

• ITEMS


Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
DESV 0306	3.0	9	50	6
DESV 0406	4.0	12	50	6
DESV 0506	5.0	15	50	6
DESV 0606	6.0	18	50	6
DESV 0808	8.0	20	60	8
DESV 1010	10.0	30	75	10
DESV 1212	12.0	30	75	12

D

DES



Aluminum & Copper cutting series / 1 Flute / Square

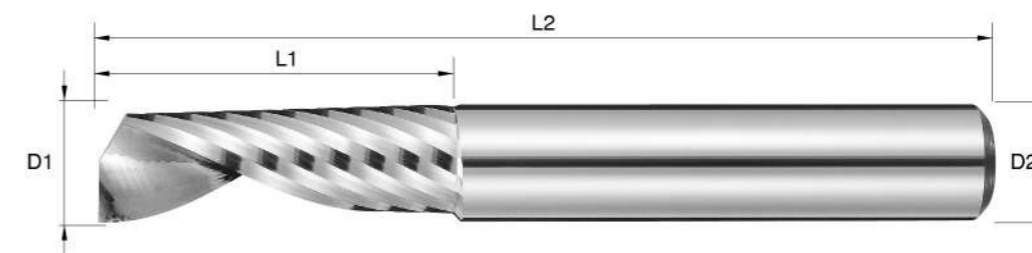

• FEATURES

- Single Flute Square for Aluminum.
- Fine & bright workpiece surface after processed.
- SMG 0.4µm Micro Grain Carbide features excellent wear resistance.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
DES 0206	2.0	6	50	6
DES 0306	3.0	9	50	6
DES 0406	4.0	12	50	6
DES 0506	5.0	15	50	6
DES 0606	6.0	18	50	6
DES 0808	8.0	20	60	8
DES 1010	10.0	30	75	10
DES 1212	12.0	30	75	12


D D MILL

DEA

Aluminum & Copper cutting series / 2 Flute / Square

MG 2 55° Finishing Cutting Data P.248

N

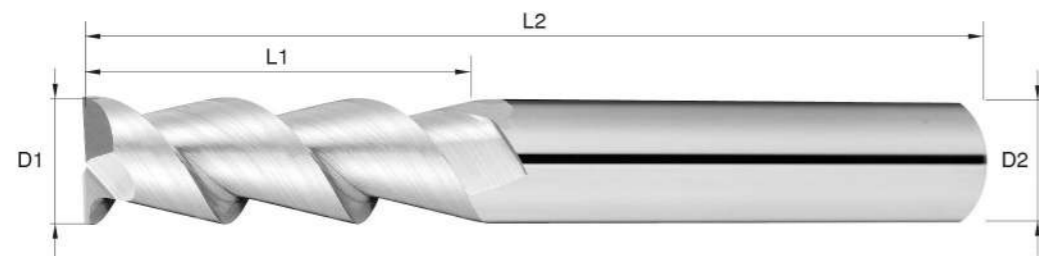

• FEATURES

- 2 Flute Square for Aluminum.
- Helix Angle: 55°
- Fine & bright workpiece surface after processed.
- Planing, Slotting, and Side Milling.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
DEA 0106	1.0	3	50	6
DEA 0206	2.0	6	50	6
DEA 0306	3.0	9	50	6
DEA 0406	4.0	12	50	6
DEA 0506	5.0	15	50	6
DEA 0606	6.0	18	50	6
DEA 0808	8.0	20	60	8
DEA 1010	10.0	30	75	10
DEA 1212	12.0	30	75	12
DEA 1616	16.0	45	100	16


D D MILL

DEB

Aluminum & Copper cutting series / 2 Flute / Square

MG 2 45° Finishing Cutting Data P.248

N

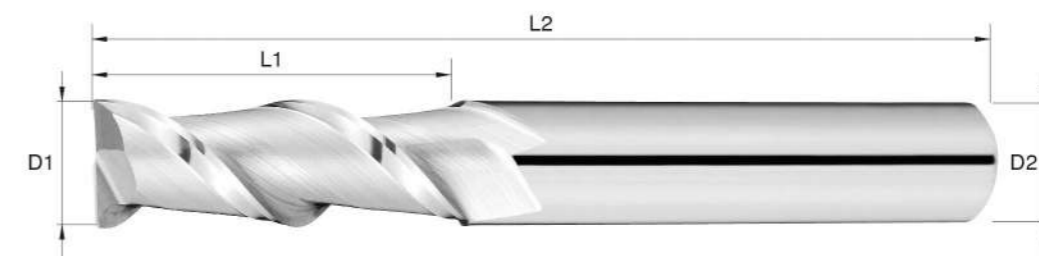

• FEATURES

- 2 Flute Square for Aluminum.
- Helix Angle: 45°
- Planing, Slotting, and Side Milling.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
DEB 0106	1.0	3	50	6
DEB 0206	2.0	6	50	6
DEB 0306	3.0	9	50	6
DEB 0406	4.0	12	50	6
DEB 0506	5.0	15	50	6
DEB 0606	6.0	18	50	6
DEB 0808	8.0	20	60	8
DEB 1010	10.0	30	75	10
DEB 1212	12.0	30	75	12
DEB 1616	16.0	45	100	16


D D MILL

DEC

Aluminum & Copper cutting series / 3 Flute / Square

MG 3 55° Finishing Cutting Data P.248

N

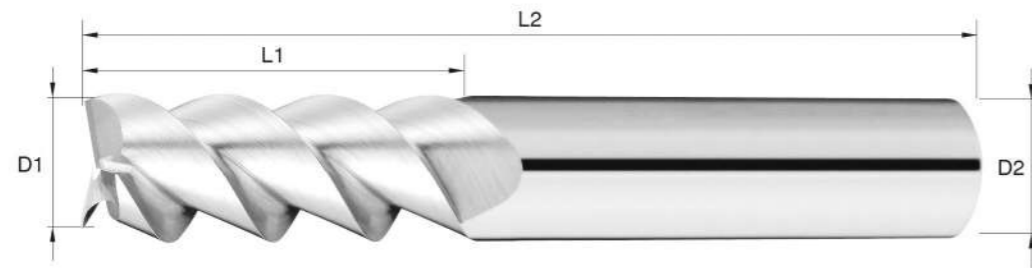

• FEATURES

- 3 Flute Square for Aluminum.
- Helix Angle: 55°
- Fine & bright workpiece surface after processed.
- Planing, Slotting, and Side Milling.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
DEC 0206	2.0	6	50	6
DEC 0306	3.0	9	50	6
DEC 0406	4.0	12	50	6
DEC 0506	5.0	15	50	6
DEC 0606	6.0	18	50	6
DEC 0808	8.0	20	60	8
DEC 1010	10.0	30	75	10
DEC 1212	12.0	30	75	12
DEC 1616	16.0	45	100	16
DEC 2020	20.0	45	100	20


D D MILL

DED

Aluminum & Copper cutting series / 3 Flute / Square

MG 3 45° Finishing Cutting Data P.248

N

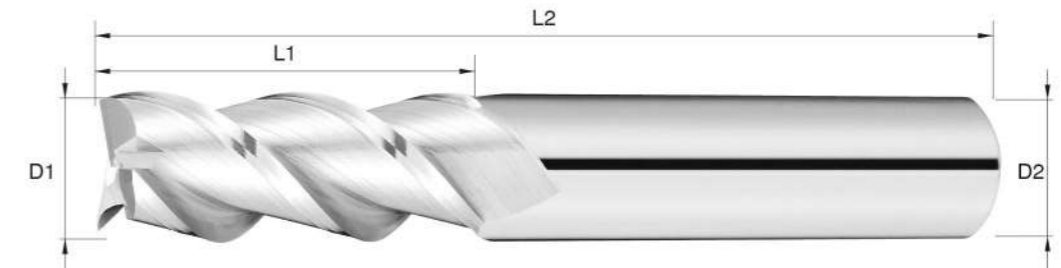

• FEATURES

- 3 Flute Square for Aluminum.
- Helix Angle: 45°
- Planing, Slotting, and Side Milling.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
DED 0206	2.0	6	50	6
DED 0306	3.0	9	50	6
DED 0406	4.0	12	50	6
DED 0506	5.0	15	50	6
DED 0606	6.0	18	50	6
DED 0808	8.0	20	60	8
DED 1010	10.0	30	75	10
DED 1212	12.0	30	75	12
DED 1616	16.0	45	100	16
DED 2020	20.0	45	100	20


D D MILL

DEDP

MG 3 45° DLC Finishing Cutting Data P.248

Aluminum & Copper cutting series / 3 Flute / Square

N

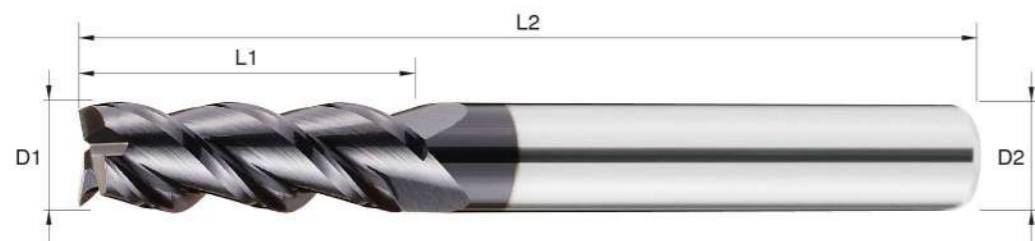

• FEATURES

- 3 Flute Square for Aluminum.
- DLC Coating: High thermal conductivity and low coefficient of friction. Excellent for Aluminum Alloy.
- Helix Angle: 45°

• ITEMS

Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
DEDP 0206	2.0	6	50	6
DEDP 0306	3.0	9	50	6
DEDP 0406	4.0	12	50	6
DEDP 0506	5.0	15	50	6
DEDP 0606	6.0	18	50	6
DEDP 0808	8.0	20	60	8
DEDP 1010	10.0	30	75	10
DEDP 1212	12.0	30	75	12
DEDP 1616	16.0	45	100	16
DEDP 2020	20.0	45	100	20


D D MILL

DEL

MG 3 55° Finishing Cutting Data P.249

Aluminum & Copper cutting series / 3 Flute / Long Flute / Square

N

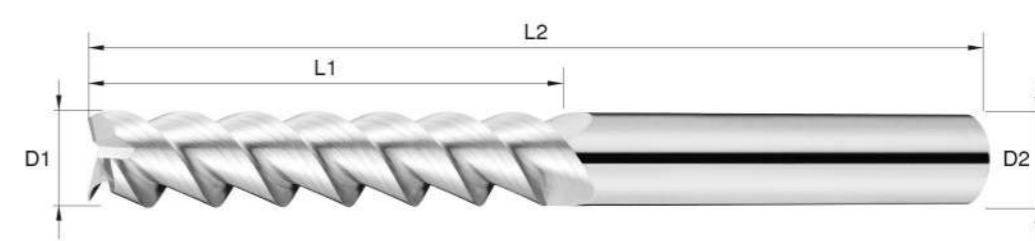

• FEATURES

- Long flute 3 Flute Square for Aluminum.
- Extended flute length for greater depth of cut.
- Planing, Slotting, and Side Milling.


• ITEMS

Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
DEL 0206	2.0	9	75	6
DEL 0306	3.0	12	75	6
DEL 0406	4.0	16	75	6
DEL 0506	5.0	20	75	6
DEL 0606	6.0	25	75	6
DEL 0808	8.0	32	75	8
DEL 1010	10.0	50	100	10
DEL 1212	12.0	50	100	12
DEL 1616	16.0	65	150	16
DEL 2020	20.0	75	150	20

D D MILL

DEPW

Aluminum & Copper cutting series / 3 Flute / Square

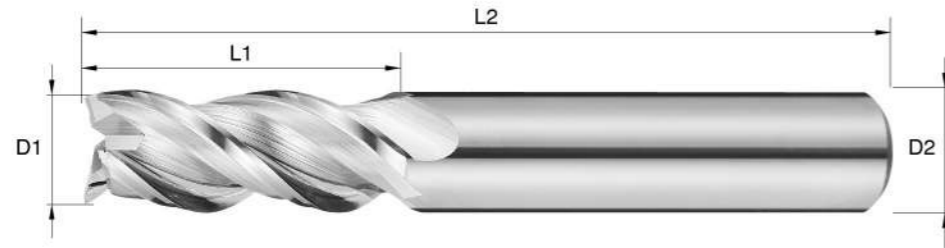

• FEATURES

- 3 Flute Square for Aluminum.
- Variable helix angle for great stability and anti-vibration. Large flute gullet for better chip removal.
- Suitable for both roughing and finishing.


• ITEMS

Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
DEPW 0306	3.0	8	50	6
DEPW 0406	4.0	11	50	6
DEPW 0506	5.0	13	50	6
DEPW 0606	6.0	16	50	6
DEPW 0808	8.0	20	65	8
DEPW 1010	10.0	25	80	10
DEPW 1212	12.0	30	80	12
DEPW 1616	16.0	50	110	16
DEPW 2020	20.0	60	150	20

D D MILL

DEPWS

Aluminum & Copper cutting series / 3 Flute / Square

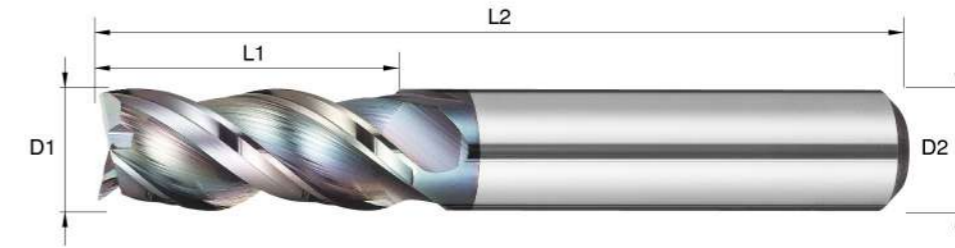

• FEATURES

- 3 Flute Square for Aluminum.
- Variable helix angle for great stability and anti-vibration. Large flute gullet for better chip removal.
- D-X Coating: Excellent wear resistance and heat resistant.

• ITEMS


Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
DEPWS 0306	3.0	8	50	6
DEPWS 0406	4.0	11	50	6
DEPWS 0506	5.0	13	50	6
DEPWS 0606	6.0	16	50	6
DEPWS 0808	8.0	20	65	8
DEPWS 1010	10.0	25	80	10
DEPWS 1212	12.0	30	80	12
DEPWS 1616	16.0	50	110	16
DEPWS 2020	20.0	60	150	20

D D MILL

DEG



Aluminum & Copper cutting series / 3 Flute / Roughing / Square

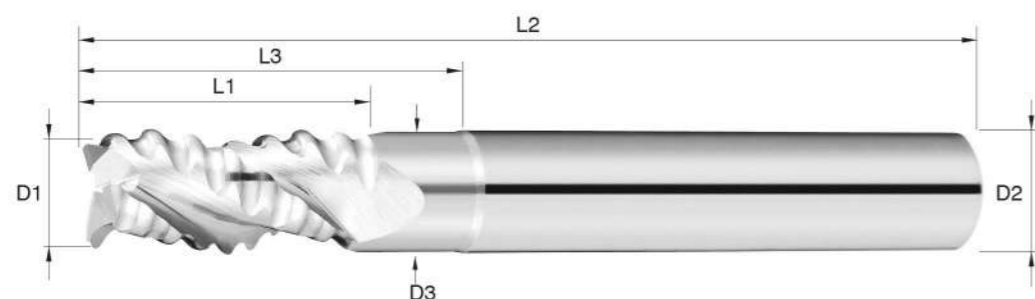

• FEATURES

- Roughing 3 Flute Square for Aluminum.
- Unique flute cutting edge especially designed for rough milling.
- Chip breaker design dedicated to excellent chip removal ability.

• ITEMS


Order No.	unit: mm					
	Diameter D1	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
DEG 0606	6.0	5.80	12	18	50	6
DEG 0808	8.0	7.70	16	24	60	8
DEG 1010	10.0	9.60	20	30	75	10
DEG 1212	12.0	11.50	24	36	75	12
DEG 1616	16.0	15.40	32	45	100	16

D D MILL

DFR



Aluminum & Copper cutting series / 3 Flute / Square

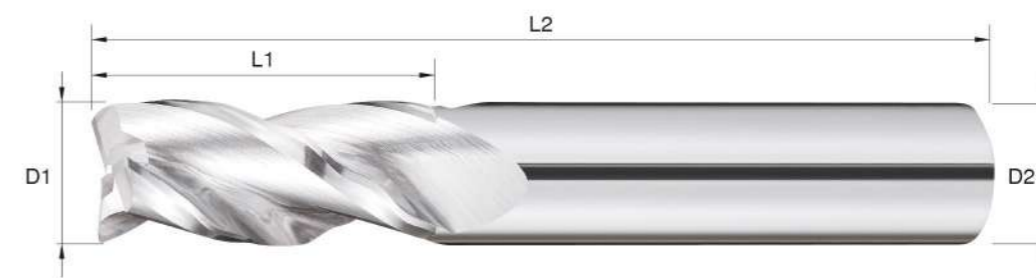

• FEATURES

- Roughing 3 Flute Square for Aluminum.
- Wave-shaped peripheral cutting edge design brings great chip removal.
- Fine & bright workpiece surface after processed.


• ITEMS

Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
DFR 0606	6.0	16	50	6
DFR 0808	8.0	20	60	8
DFR 1010	10.0	25	75	10
DFR 1212	12.0	30	75	12
DFR 1616	16.0	40	100	16
DFR 2020	20.0	45	100	20

D D MILL

DRC

Aluminum & Copper cutting series / 3 Flute / Corner Radius

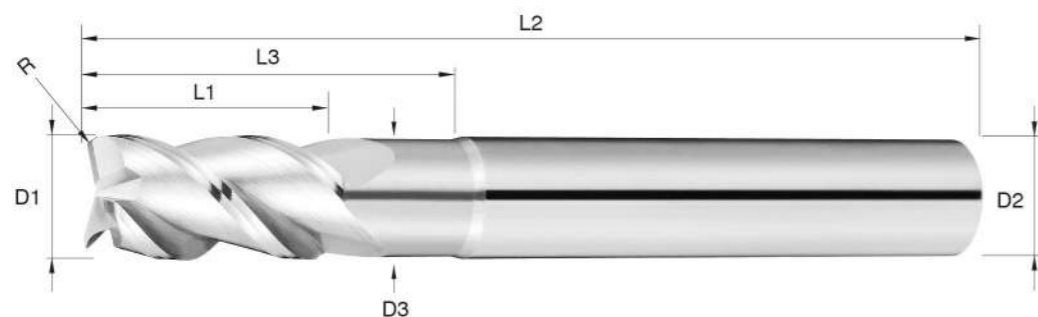

• FEATURES

- 3 Flute Corner Radius for Aluminum.
- Great performance when profile milling at high speed.


• ITEMS

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length		O.A.L. L2	Shank Dia D2
				L1	L3		
DRC 0305	3.0	0.5	2.90	6	9	50	6
DRC 0405	4.0	0.5	3.88	8	12	50	6
DRC 0605	6.0	0.5	5.80	12	18	50	6
DRC 0610	6.0	1.0	5.80	12	18	50	6
DRC 0805	8.0	0.5	7.70	16	24	60	8
DRC 0810	8.0	1.0	7.70	16	24	60	8
DRC 1002	10.0	0.2	9.60	20	30	75	10
DRC 1005	10.0	0.5	9.60	20	30	75	10
DRC 1010	10.0	1.0	9.60	20	30	75	10
DRC 1202	12.0	0.2	11.50	24	36	75	12
DRC 1205	12.0	0.5	11.50	24	36	75	12
DRC 1210	12.0	1.0	11.50	24	36	75	12
DRC 1603	16.0	0.3	15.40	30	40	100	16
DRC 1605	16.0	0.5	15.40	30	40	100	16
DRC 1610	16.0	1.0	15.40	30	40	100	16
DRC 1630	16.0	3.0	15.40	30	40	100	16

D D MILL

DEPWR

Aluminum & Copper cutting series / 3 Flute / Corner Radius

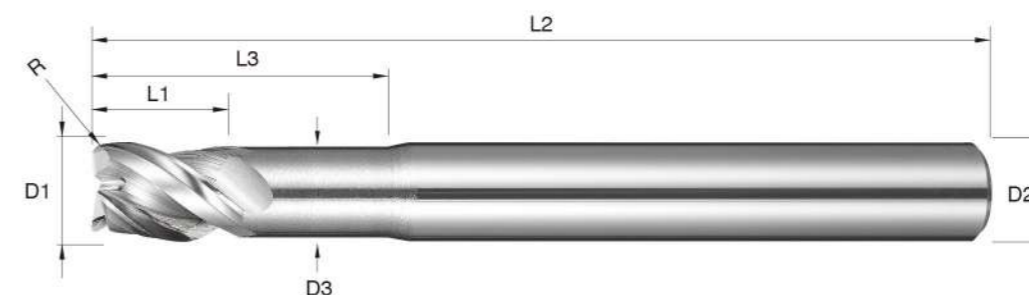

• FEATURES

- 3 Flute Corner Radius for Aluminum.
- Variable helix angle for great stability and anti-vibration. Large flute gullet for better chip removal.
- Great performance when profile milling at high speed.

• ITEMS


Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length		O.A.L. L2	Shank Dia D2
				L1	L3		
DEPWR 0305	3.0	0.5	2.8	4.5	9	50	6
DEPWR 0405	4.0	0.5	3.7	6	12	50	6
DEPWR 0605	6.0	0.5	5.5	9	18	60	6
DEPWR 0610	6.0	1	5.5	9	18	60	6
DEPWR 0805	8.0	0.5	7.3	12	24	75	8
DEPWR 0810	8.0	1	7.3	12	24	75	8
DEPWR 1005	10.0	0.5	9.2	15	30	80	10
DEPWR 1010	10.0	1	9.2	15	30	80	10
DEPWR 1205	12.0	0.5	11	18	36	110	12
DEPWR 1210	12.0	1	11	18	36	110	12
DEPWR 1605	16.0	0.5	14.5	24	48	110	16
DEPWR 1610	16.0	1	14.5	24	48	110	16

D D MILL

DBX



Aluminum & Copper cutting series / 2 Flute / Ball Nose

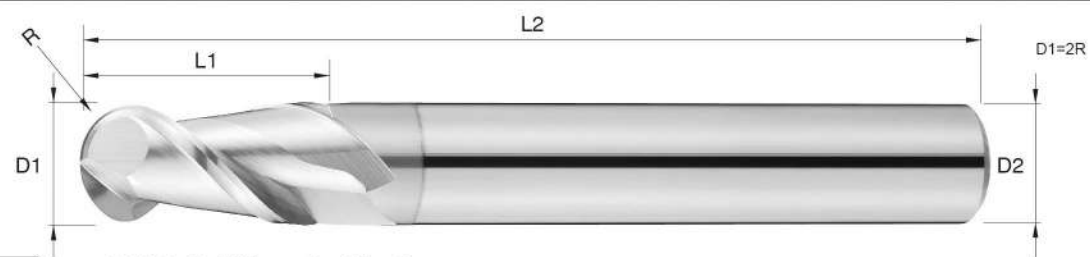

• FEATURES

- 2 Flute Ball Nose for Aluminum.
- CRN Coating possesses high thermal conductivity and low coefficient of friction excellent for Copper Alloy.

• ITEMS


unit: mm

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
DBX 0104	R0.5	3	50	4
DBX 0154	R0.75	4	50	4
DBX 0204	R1	6	50	4
DBX 0303	R1.5	6	50	3
DBX 0404	R2	8	50	4
DBX 0606	R3	12	50	6
DBX 0808	R4	16	60	8
DBX 1010	R5	20	75	10
DBX 1212	R6	24	75	12

D DEDX



Aluminum & Copper cutting series / 3 Flute / Square

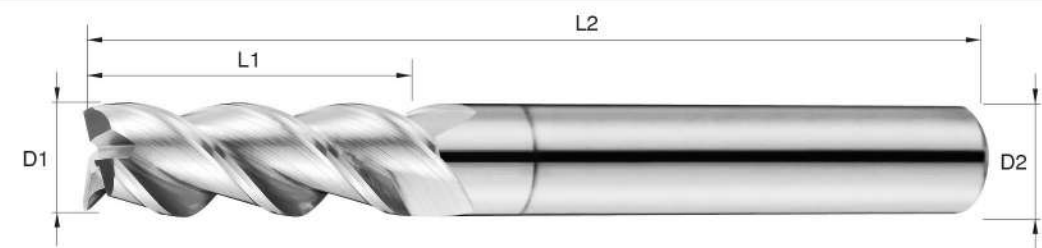


• FEATURES

- 3 Flute Square for Aluminum.
- CRN Coating possesses high thermal conductivity and low coefficient of friction excellent for Copper Alloy.

• ITEMS

unit: mm

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
DEDX 0206	2.0	6	50	6
DEDX 0306	3.0	9	50	6
DEDX 0406	4.0	12	50	6
DEDX 0506	5.0	15	50	6
DEDX 0606	6.0	18	50	6
DEDX 0808	8.0	20	60	8
DEDX 1010	10.0	30	75	10
DEDX 1212	12.0	30	75	12
DEDX 1616	16.0	45	100	16
DEDX 2020	20.0	45	100	20

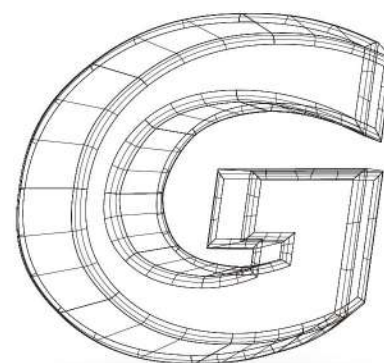


GRAPHITE CUTTING SERIES

G.pro

SGBB

Graphite cutting series / 4 Flute / Ball Nose

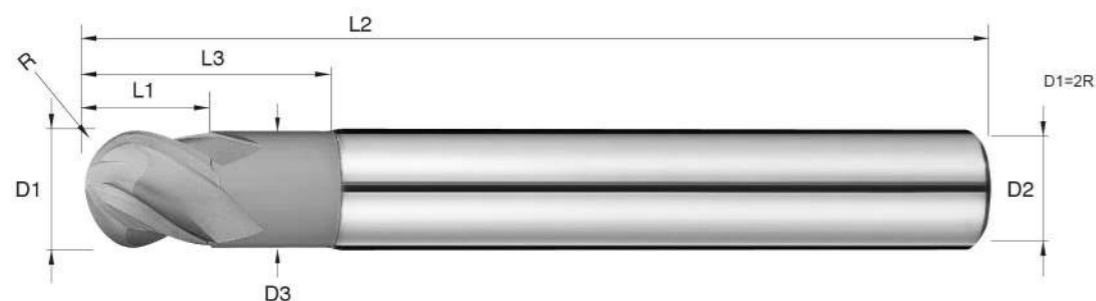

• FEATURES


- 4 Flute Ball Nose for Graphite.
- CVD Diamond Coating maximize abrasion resistance and extend tool life.
- GMG carbide material with perfect anti-vibration, suitable for CVD Diamond Coating.

• ITEMS

Order No.	Radius	Neck Dia	Flute Length	Effective Length	O.A.L.	Shank Dia
	R	D3	L1	L3	L2	D2
SGBB 0404	R2	3.88	4	8	50	4
SGBB 0606	R3	5.80	6	12	50	6
SGBB 0808	R4	7.70	8	16	60	8
SGBB 1010	R5	9.60	10	20	75	10
SGBB 1212	R6	11.50	12	20	75	12

SGBF

Graphite cutting series / 4 Flute / Ball Nose

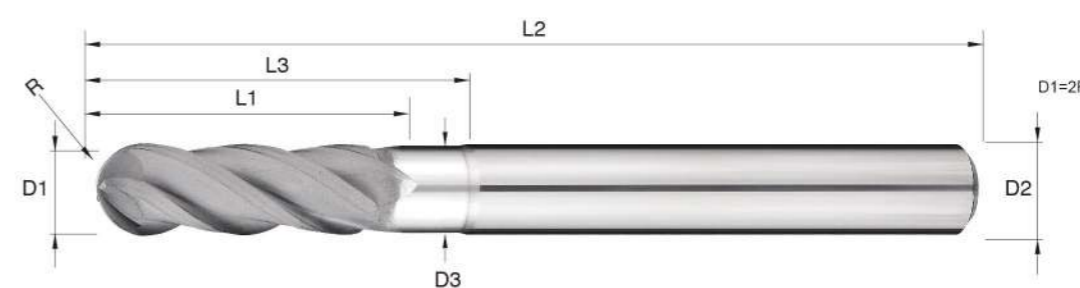

• FEATURES


- 4 Flute Ball Nose for Graphite.
- CVD Diamond Coating maximize abrasion resistance and extend tool life.
- GMG Carbide material with perfect anti-vibration, suitable for CVD Diamond Coating.

• ITEMS

Order No.	Radius	Neck Dia	Flute Length	Effective Length	O.A.L.	Shank Dia
	R	D3	L1	L3	L2	D2
SGBF 0404	R2	3.88	20	25	75	4
SGBF 0404A	R2	3.88	20	25	100	4
SGBF 0606	R3	5.80	25	30	75	6
SGBF 0606A	R3	5.80	25	30	100	6
SGBF 0606B	R3	5.80	25	30	150	6
SGBF 0808	R4	7.70	30	40	100	8
SGBF 0808B	R4	7.70	30	40	150	8
SGBF 1010	R5	9.60	30	40	100	10
SGBF 1010B	R5	9.60	30	40	150	10
SGBF 1212	R6	11.50	30	40	100	12
SGBF 1212B	R6	11.50	30	40	150	12

SGEB

Graphite cutting series / 4 Flute / Square

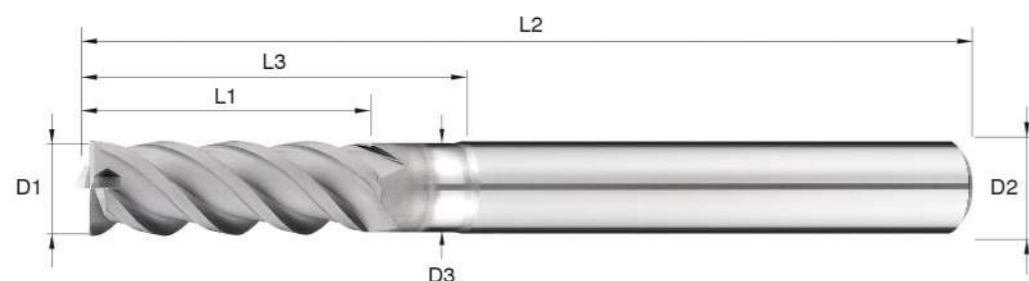

• FEATURES


- 4 Flute Square for Graphite.
- CVD Diamond Coating maximize abrasion resistance and extend tool life.
- GMG Carbide material with perfect anti-vibration, suitable for CVD Diamond Coating.

• ITEMS

Order No.	Diameter	Neck Dia	Flute Length	Effective Length	O.A.L.	Shank Dia
	D1	D3	L1	L3	L2	D2
SGEB 0404	4.0	3.88	20	25	75	4
SGEB 0404A	4.0	3.88	20	25	100	4
SGEB 0606	6.0	5.80	25	30	75	6
SGEB 0606A	6.0	5.80	25	30	100	6
SGEB 0606B	6.0	5.80	25	30	150	6
SGEB 0808	8.0	7.70	30	40	100	8
SGEB 0808B	8.0	7.70	30	40	150	8
SGEB 1010	10.0	9.60	30	40	100	10
SGEB 1010B	10.0	9.60	30	40	150	10
SGEB 1212	12.0	11.50	30	40	100	12
SGEB 1212B	12.0	11.50	30	40	150	12

SGRD

Graphite cutting series / 4 Flute / Corner Radius

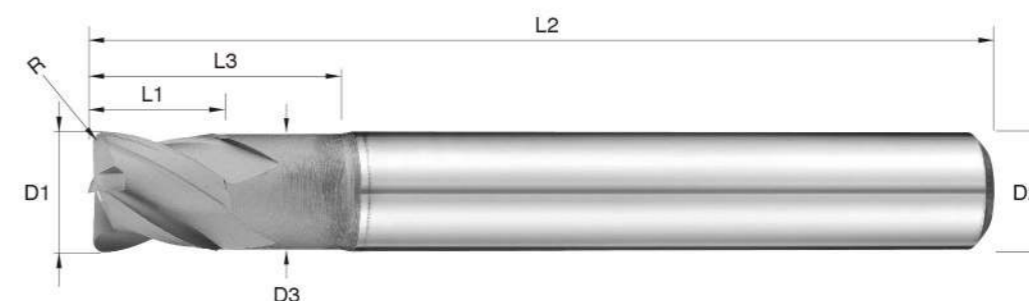

• FEATURES


- 4 Flute Corner Radius for Graphite.
- CVD Diamond Coating maximize abrasion resistance and extend tool life.
- GMG Carbide material with perfect anti-vibration, suitable for CVD Diamond Coating.

• ITEMS

Order No.	Diameter	Corner R	Neck Dia	Flute Length	Effective Length	O.A.L.	Shank Dia
	D1	R	D3	L1	L3	L2	D2
SGRD 0403	4.0	0.3	3.88	4	8	50	4
SGRD 0405	4.0	0.5	3.88	4	8	50	4
SGRD 0603	6.0	0.3	5.80	6	12	50	6
SGRD 0605	6.0	0.5	5.80	6	12	50	6
SGRD 0805	8.0	0.5	7.70	8	16	60	8
SGRD 1010	10.0	1.0	9.60	10	20	75	10
SGRD 1210	12.0	1.0	11.50	12	20	75	12

SGRB

Graphite cutting series / 4 Flute / Corner Radius

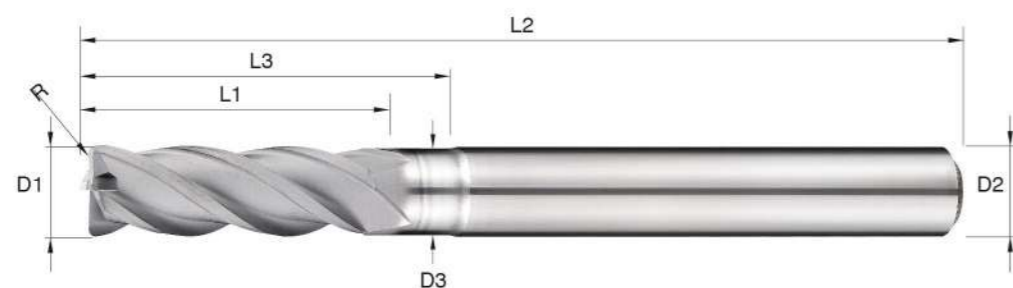

• FEATURES


- 4 Flute Corner Radius for Graphite.
- CVD Diamond Coating maximize abrasion resistance and extend tool life.
- GMG Carbide material with perfect anti-vibration, suitable for CVD Diamond Coating.

• ITEMS

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	unit: mm	
							Shank Dia D2	
SGRB 0403	4.0	0.3	3.88	20	25	75	4	
SGRB 0403A	4.0	0.3	3.88	20	25	100	4	
SGRB 0405	4.0	0.5	3.88	20	25	75	4	
SGRB 0405A	4.0	0.5	3.88	20	25	100	4	
SGRB 0603	6.0	0.3	5.80	25	30	75	6	
SGRB 0603A	6.0	0.3	5.80	25	30	100	6	
SGRB 0603B	6.0	0.3	5.80	25	30	150	6	
SGRB 0605	6.0	0.5	5.80	25	30	75	6	
SGRB 0605A	6.0	0.5	5.80	25	30	100	6	
SGRB 0605B	6.0	0.5	5.80	25	30	150	6	
SGRB 0805	8.0	0.5	7.70	30	40	100	8	
SGRB 0805B	8.0	0.5	7.70	30	40	150	8	
SGRB 1010	10.0	1.0	9.60	30	40	100	10	
SGRB 1010B	10.0	1.0	9.60	30	40	150	10	
SGRB 1210	12.0	1.0	11.50	30	40	100	12	
SGRB 1210B	12.0	1.0	11.50	30	40	150	12	

SGBS

Graphite cutting series / 2 Flute / Long Neck / Ball Nose

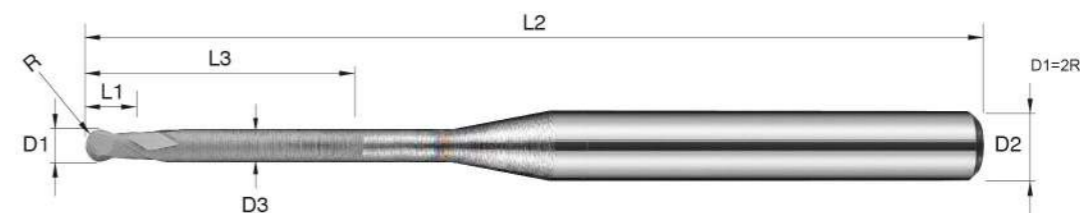

• FEATURES

- Long Neck 2 Flute Ball Nose for Graphite.
- CVD Diamond Coating maximize abrasion resistance and extend tool life.
- GMG Carbide material with perfect anti-vibration, suitable for CVD Diamond Coating.

• ITEMS

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	unit: mm	
						Shank Dia D2	
SGBS 01006	R0.5	0.95	1.5	6	50	4	
SGBS 01008	R0.5	0.95	1.5	8	50	4	
SGBS 01010	R0.5	0.95	1.5	10	50	4	
SGBS 01012	R0.5	0.95	1.5	12	50	4	
SGBS 01508	R0.75	1.45	2	8	50	4	
SGBS 01510	R0.75	1.45	2	10	50	4	
SGBS 01512	R0.75	1.45	2	12	50	4	
SGBS 01516	R0.75	1.45	2	16	50	4	
SGBS 01520	R0.75	1.45	2	20	50	4	
SGBS 02008	R1	1.92	3	8	50	4	
SGBS 02010	R1	1.92	3	10	50	4	
SGBS 02012	R1	1.92	3	12	50	4	
SGBS 02016	R1	1.92	3	16	50	4	
SGBS 02020	R1	1.92	3	20	50	4	
SGBS 03016	R1.5	2.90	4	16	50	4	
SGBS 03025	R1.5	2.90	4	25	75	4	
SGBS 04020	R2	3.88	5	20	50	4	
SGBS 04030	R2	3.88	5	30	75	4	

SGES

Graphite cutting series / 4 Flute / Long Neck / Square



• FEATURES


- Long Neck 4 Flute Square for Graphite.
- CVD Diamond Coating maximize abrasion resistance and extend tool life.
- GMG Carbide material with perfect anti-vibration, suitable for CVD Diamond Coating.

• ITEMS

Order No.	Diameter	Neck Dia	Flute Length	Effective Length	O.A.L.	Shank Dia	unit: mm
	D1	D3	L1	L3	L2	D2	
SGES 01006	1.0	0.95	1.5	6	50	4	
SGES 01008	1.0	0.95	1.5	8	50	4	
SGES 01010	1.0	0.95	1.5	10	50	4	
SGES 01510	1.5	1.45	2	10	50	4	
SGES 01512	1.5	1.45	2	12	50	4	
SGES 01516	1.5	1.45	2	16	50	4	
SGES 02010	2.0	1.92	3	10	50	4	
SGES 02012	2.0	1.92	3	12	50	4	
SGES 02016	2.0	1.92	3	16	50	4	
SGES 02020	2.0	1.92	3	20	50	4	
SGES 03016	3.0	2.90	4	16	50	4	
SGES 03020	3.0	2.90	4	20	50	4	
SGES 03025	3.0	2.90	4	25	75	4	
SGES 04020	4.0	3.88	5	20	50	4	
SGES 04030	4.0	3.88	5	30	75	4	

SGRS

Graphite cutting series / 2 & 4 Flute / Long Neck / Corner Radius

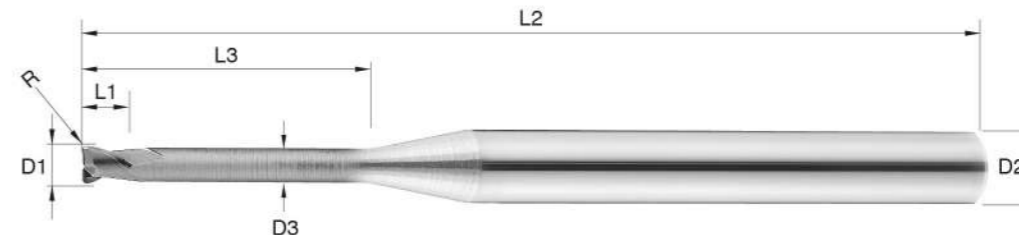

• FEATURES

- Long neck 2 & 4 Flute Corner Radius for Graphite.
- CVD Diamond Coating maximize abrasion resistance and extend tool life.
- GMG Carbide material with perfect anti-vibration, suitable for CVD Diamond Coating.

• ITEMS

Order No.	Diameter	Corner R	Neck Dia	Flute Length	Effective Length	O.A.L.	Shank Dia	unit: mm
	D1	R	D3	L1	L3	L2	D2	
SGRS 01008	1.0	0.2	0.95	1.0	8	50	4	2
SGRS 01010	1.0	0.2	0.95	1.0	10	50	4	2
SGRS 01012	1.0	0.2	0.95	1.0	12	50	4	2
SGRS 01016	1.0	0.2	0.95	1.0	16	50	4	2
SGRS 01020	1.0	0.2	0.95	1.0	20	50	4	2
SGRS 01508	1.5	0.2	1.45	1.5	8	50	4	2
SGRS 01510	1.5	0.2	1.45	1.5	10	50	4	2
SGRS 01512	1.5	0.2	1.45	1.5	12	50	4	2
SGRS 01516	1.5	0.2	1.45	1.5	16	50	4	2
SGRS 01520	1.5	0.2	1.45	1.5	20	50	4	2
SGRS 02010	2.0	0.2	1.92	2.0	10	50	4	4
SGRS 02012	2.0	0.2	1.92	2.0	12	50	4	4
SGRS 02016	2.0	0.2	1.92	2.0	16	50	4	4
SGRS 02020	2.0	0.2	1.92	2.0	20	50	4	4
SGRS 03020	3.0	0.2	2.90	3.0	20	50	4	4
SGRS 03025	3.0	0.2	2.90	3.0	25	75	4	4
SGRS 030201	3.0	0.5	2.90	3.0	20	50	4	4
SGRS 030251	3.0	0.5	2.90	3.0	25	75	4	4
SGRS 04020	4.0	0.2	3.88	4.0	20	50	4	4
SGRS 04030	4.0	0.2	3.88	4.0	30	75	4	4
SGRS 040201	4.0	0.5	3.88	4.0	20	50	4	4
SGRS 040301	4.0	0.5	3.88	4.0	30	75	4	4


A AX MILL

APB



Resin & Acrylic cutting series / 2 Flute / Ball Nose

A.B.S

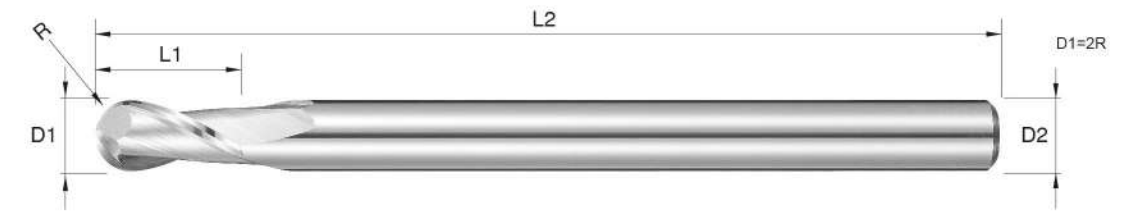


• FEATURES

- 2 Flute Ball Nose for A.B.S
- Special angle ground for fine workpiece surface after processed.
- SMG 0.4μm Micro Grain Carbide features excellent wear resistance.

• ITEMS

Order No.	Radius R	Flute Length L1	O.A.L. L2	Shank Dia D2
APB 0104	R0.5	3	50	4
APB 0154	R0.75	4	50	4
APB 0204	R1	5	50	4
APB 0304	R1.5	8	50	4
APB 0404	R2	10	50	4
APB 0606	R3	12	75	6
APB 0808	R4	16	100	8
APB 1010	R5	20	100	10
APB 1212	R6	24	100	12

unit: mm

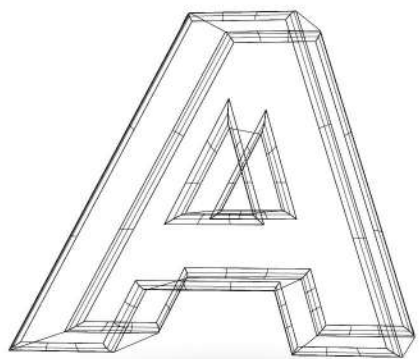

RESIN & ACRYLIC CUTTING SERIES

AX MILL


A AX MILL

APES

Resin & Acrylic cutting series / 1 Flute / Square



A.B.S

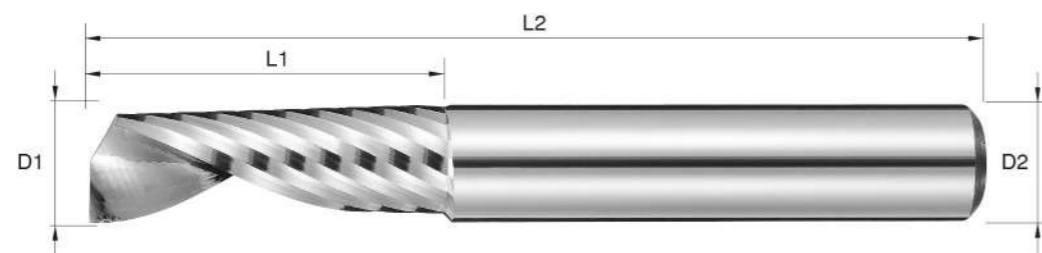

• FEATURES

- Single Flute Square for A.B.S
- Sharp edge design brings excellent machining accuracy and fine, bright workpiece surface.
- SMG 0.4µm Micro Grain Carbide features excellent wear resistance.

• ITEMS

Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
APES 0206	2.0	6	50	6
APES 0306	3.0	9	50	6
APES 0406	4.0	12	50	6
APES 0506	5.0	15	50	6
APES 0606	6.0	18	50	6
APES 0808	8.0	20	60	8
APES 1010	10.0	30	75	10
APES 1212	12.0	30	75	12


A AX MILL

APEB

Resin & Acrylic cutting series / 2 Flute / Square



A.B.S

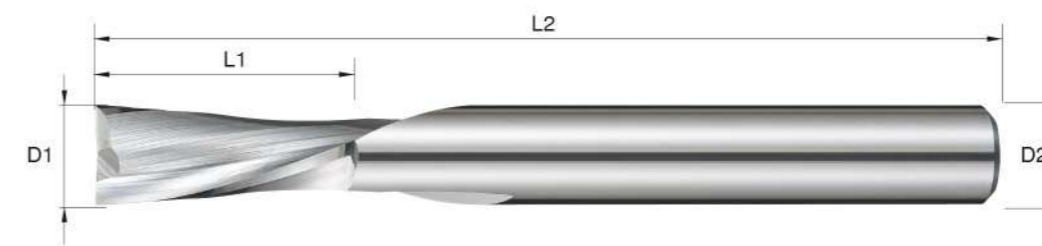

• FEATURES

- 2 Flute square for A.B.S
- Left hand spiral, right hand cut end mill can push the chip down to remove, not to lift it up.
- Sharp edge design brings excellent machining accuracy and fine, bright workpiece surface.

• ITEMS

Order No.	unit: mm			
	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
APEB 0406	4.0	15	75	4
APEB 0606	6.0	15	75	6
APEB 0808	8.0	20	75	8
APEB 1010	10.0	25	100	10
APEB 1212	12.0	30	100	12

COM


CFRP MACHINING SERIES

COM.pro

COM COM.pro

CFPA

CFRP machining series / 10 & 12 Flute / Square / for CFRP

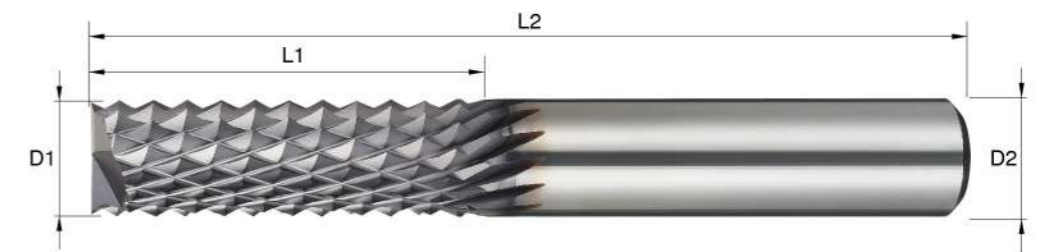

• FEATURES

- Roughing 10 & 12 Flute Square for CFRP.
- CVD Diamond Coating to maximize wear resistance and extend tool life.
- Unique cutting edge design to reduce cutting force. Excellent performance for roughing.


• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2	unit: mm
					Flutes
CFPA 0606	6.0	18	75	6	10
CFPA 0808	8.0	24	75	8	10
CFPA 1010	10.0	30	100	10	12
CFPA 1212	12.0	36	100	12	12

COM COM.pro

CFRA

CFRP machining series / 4 Flute / Square / for CFRP

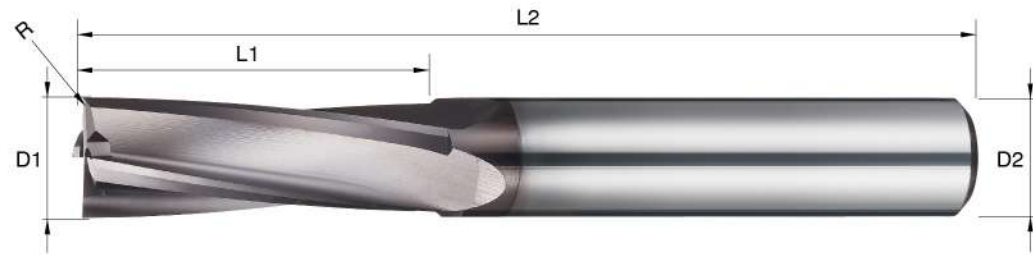


• FEATURES

- Finishing 4 Flute Square for CFRP.
- CVD Diamond Coating to maximize wear resistance and extend tool life.
- Unique cutting edge design to reduce cutting force. Excellent performance for finishing.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
CFRA 0602	6.0	18	75	6
CFRA 0802	8.0	24	75	8
CFRA 1002	10.0	30	100	10
CFRA 1202	12.0	36	100	12

unit: mm

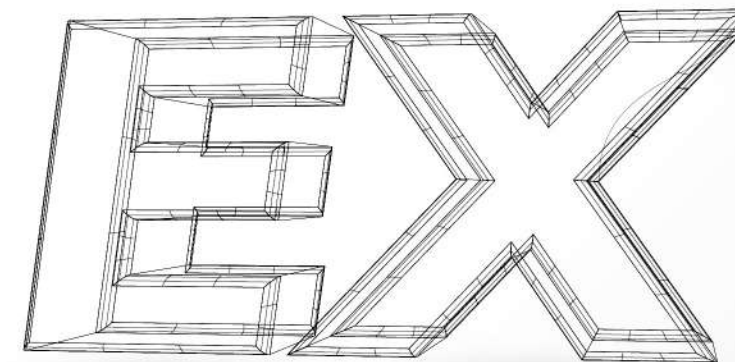


EXCHANGEABLE HEAD END MILLS SERIES

MAGIC SHANK

EX MAGIC SHANK

EX2CS

Exchangeable Head End Mills series / Carbide Shank

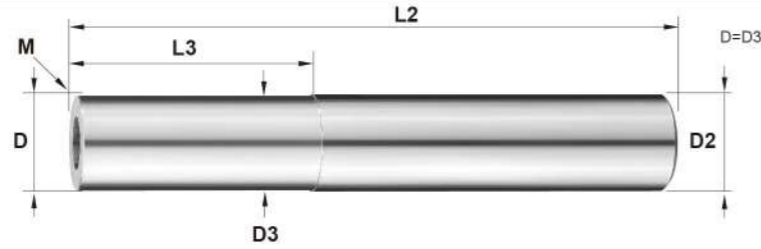

• FEATURES

- Special Carbide material with great anti-vibration.
- Shank Dia: 10.0~25.0 mm; OAL: 100~300 mm

• ITEMS


Order No.	Neck Dia D	Shank Dia D2	Neck Length L3	Thread M	O.A.L. L2
EX2CS 10100	9.7	10.0	40	M5	100
EX2CS 10150	9.7	10.0	90	M5	150
EX2CS 12100	11.7	12.0	40	M6	100
EX2CS 12150	11.7	12.0	90	M6	150
EX2CS 12200	11.7	12.0	110	M6	200
EX2CS 16100	15.5	16.0	40	M8	100
EX2CS 16150	15.5	16.0	90	M8	150
EX2CS 16200	15.5	16.0	110	M8	200
EX2CS 20100	19.5	20.0	40	M10	100
EX2CS 20150	19.5	20.0	90	M10	150
EX2CS 20200	19.5	20.0	110	M10	200
EX2CS 20250	19.5	20.0	150	M10	250

unit: mm

EX MAGIC SHANK

EX2SRD

Exchangeable Head End Mills series / 4 Flute / Ex Corner Radius

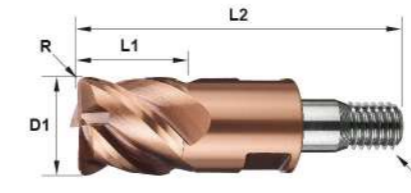

• FEATURES

- Combination of Carbide and Stainless steel: Greater anti-vibration and wear resistance.
- i8 Coating: High temperature resistance and low wear.

• ITEMS


Order No.	Diameter D1	Corner R R	Flute Length L1	Thread M	O.A.L. L2
EX2SRD 1005	10.0	0.5	10	M5	32
EX2SRD 1010	10.0	1.0	10	M5	32
EX2SRD 1205	12.0	0.5	12	M6	40
EX2SRD 1210	12.0	1.0	12	M6	40
EX2SRD 1605	16.0	0.5	16	M8	48
EX2SRD 1610	16.0	1.0	16	M8	48
EX2SRD 2010	20.0	1.0	20	M10	55
EX2SRD 2020	20.0	2.0	20	M10	55

unit: mm

EX

EX2SB

Exchangeable Head End Mills series / 2 Flute / Ex Ball Nose

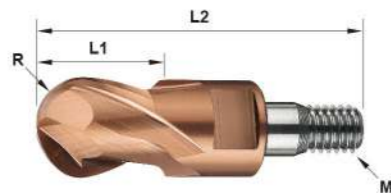

• FEATURES

- Combination of Carbide and Stainless steel: Greater anti-vibration and wear resistance.
- i8 Coating: High temperature resistance and low wear.

• ITEMS


Order No.	Radius R	Flute Length L1	Thread M	O.A.L. L2
EX2SB 1010	R5	10	M5	32
EX2SB 1212	R6	11	M6	40
EX2SB 1616	R8	16	M8	48
EX2SB 2020	R10	20	M10	55

unit: mm

EX

EX2SEB

Exchangeable Head End Mills series / 4 Flute / Ex Square

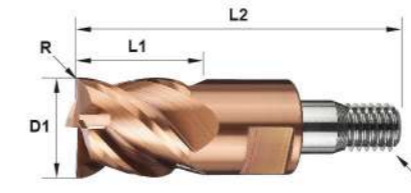

• FEATURES

- Combination of Carbide and Stainless steel: Greater anti-vibration and wear resistance.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

Order No.	Diameter D1	Flute Length L1	Thread M	O.A.L. L2
EX2SEB 1010	10.0	10	M5	32
EX2SEB 1212	12.0	12	M6	40
EX2SEB 1616	16.0	16	M8	48
EX2SEB 2020	20.0	20	M10	55

unit: mm

EX

MAGIC SHANK

EX2DPW



Exchangeable Head End Mills series / 3 Flute / EX Square



• FEATURES

- Variable helix angle for great stability and anti-vibration. Large flute gullet for better chip removal.
- Suitable for both roughing and finishing.

• ITEMS

Order No.	Diameter D1	Flute Length L1	Thread M	O.A.L. L2
EX2DPW 1010	10.0	10	M5	32
EX2DPW 1212	12.0	12	M6	40
EX2DPW 1616	16.0	16	M8	48
EX2DPW 2020	20.0	20	M10	55


unit: mm

EX

EX2SIW



Exchangeable Head End Mills series / 4 Flute / EX Square

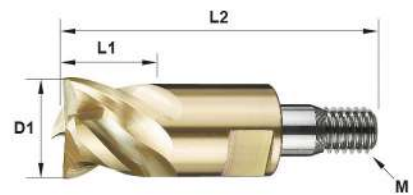


• FEATURES

- Variable helix angle and unequal flute spacing offer great stability and anti-vibration.
- G-plus Coating: Higher efficiency and longer tool life.

• ITEMS

Order No.	Diameter D1	Flute Length L1	Thread M	O.A.L. L2
EX2SIW 1010	10.0	10	M5	32
EX2SIW 1212	12.0	12	M6	40
EX2SIW 1616	16.0	16	M8	48
EX2SIW 2020	20.0	20	M10	55

unit: mm

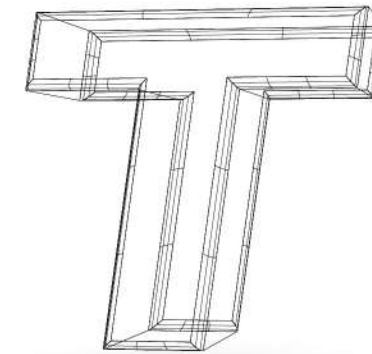

THREAD MILLING SERIES


T.pro

EMT

Thread milling series / Internal Threading

MG HRC 55 G100 Finishing Semi-Finishing Cutting Data P.252

H P K M S N

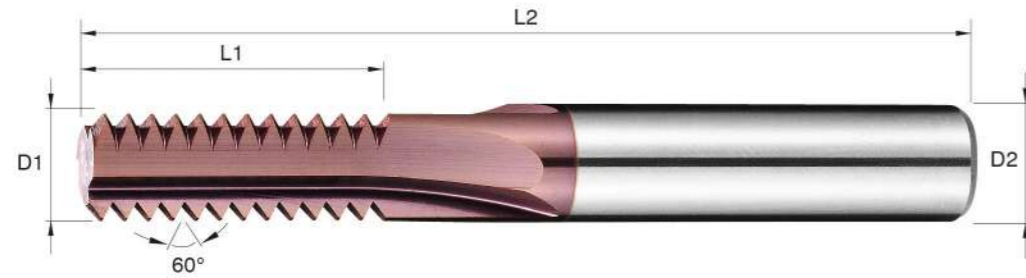


• FEATURES

- New cutting edge better than old design to improve chip removal.
- Straight Flute for higher efficiency.

• ITEMS

Order No.	Thread SIZE	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2	Flute
EMT 03P050	M3x0.5	2.2	5.5	50	6	3
EMT 04P070	M4x0.7	3.1	7.7	50	6	3
EMT 05P080	M5x0.8	3.6	9.6	50	6	3
EMT 06P100	M6x1.0	4.0	11.0	50	6	3
EMT 08P125	M8x1.25	5.0	15.0	50	6	3
EMT 10P150	M10x1.5	7.0	18.0	60	8	3
EMT 12P175	M12x1.75	8.0	21.0	60	8	3
EMT 16P200	M16x2.0	10.0	28.0	75	10	3
EMT 20P250	M20x2.5	14.0	35.0	100	14	4

unit: mm

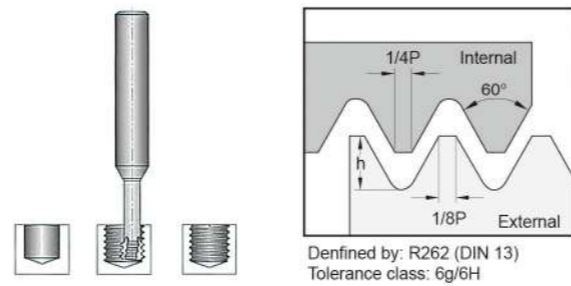


EMTW

Thread milling series / Internal Threading / Helical Flute

S MG HRC 60 G100 Finishing Semi-Finishing

H P K M S N

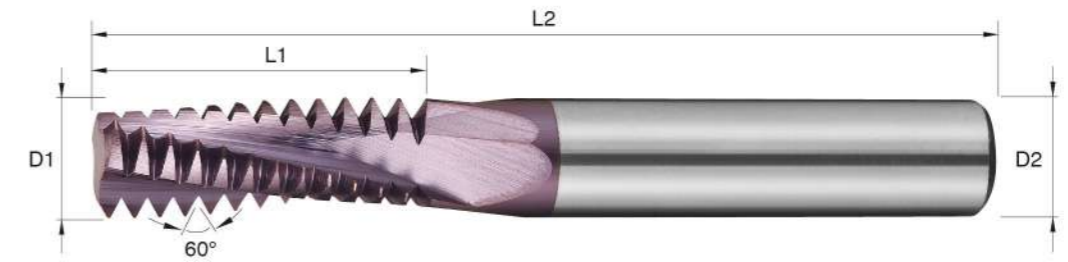


• FEATURES

- New cutting edge better than old design to improve chip removal.
- Helical Flute can reduce cutting force.
- Fine workpiece surface after processing.

• ITEMS

Order No.	Thread SIZE	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2	Flute
EMTW 03P050	M3x0.5	2.2	5.3	50	6	3
EMTW 04P070	M4x0.7	3.1	7.4	50	6	3
EMTW 05P080	M5x0.8	3.6	9.2	50	6	3
EMTW 06P100	M6x1.0	4.0	10.5	50	6	3
EMTW 08P125	M8x1.25	5.0	14.4	50	6	3
EMTW 10P150	M10x1.5	7.0	17.3	60	8	3
EMTW 12P175	M12x1.75	8.0	20.1	60	8	3
EMTW 16P200	M16x2.0	10.0	27.0	75	10	3
EMTW 20P250	M20x2.5	14.0	33.8	100	14	4

unit: mm

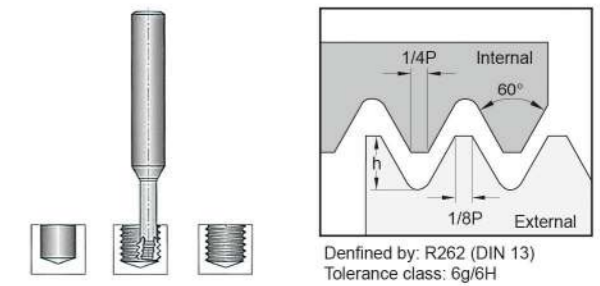

EMTH

S MG HRC 60 G100 Finishing Semi-Finishing

Thread milling series / Internal Threading / Helical Flute / Hole Coolant H P K M S N




• FEATURES

- New cutting edge better than old design to improve chip removal.
- Straight coolant holes to lower down the heat and for better chip removal.

• ITEMS

Order No.	Thread SIZE	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2	Flute
EMTH 04P070	M4x0.7	3.1	7.4	50	6	3
EMTH 05P080	M5x0.8	3.8	9.2	50	6	3
EMTH 06P100	M6x1.0	4.6	10.5	50	6	3
EMTH 08P125	M8x1.25	6.0	14.4	50	6	3
EMTH 10P150	M10x1.5	7.8	17.3	60	8	3
EMTH 12P175	M12x1.75	9.0	20.1	75	10	3
EMTH 16P200	M16x2.0	11.8	27.0	75	12	3
EMTH 20P250	M20x2.5	15.0	33.8	100	16	4

unit: mm

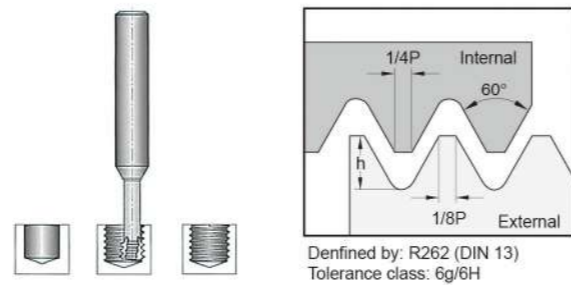

EMTS

S MG HRC 60 i8 Finishing Semi-Finishing Cutting Data P.252

Thread milling series / Internal Threading H P K M S N



• FEATURES


- New cutting edge better than old design to improve chip removal.
- Excellent for thread milling in great depth.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

Order No.	Thread SIZE	Diameter D1	Effective Length L3	O.A.L. L2	Shank Dia D2	Flute
EMTS 03P050	M3x0.5	2.35	10	50	6	3
EMTS 04P070	M4x0.7	3.10	13	50	6	3
EMTS 05P080	M5x0.8	3.80	16	50	6	3
EMTS 06P100	M6x1.0	4.65	20	75	6	3
EMTS 08P125	M8x1.25	5.95	24	75	6	3

unit: mm

Flute Length (L1) = Pitch x 3

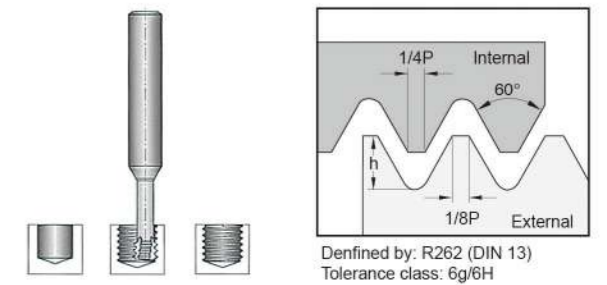


EMTF

Thread milling series / Internal Threading

MG HRC 55 G100 Finishing Semi-Finishing Cutting Data P.252

H P K M S N

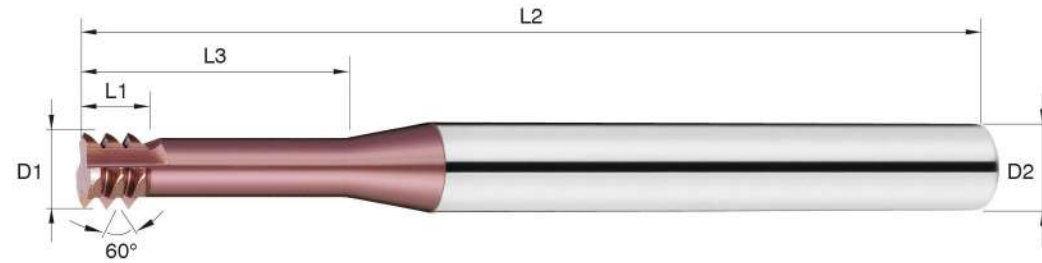

• FEATURES



- New cutting edge better than old design to improve chip removal.
- Excellent for thread milling in great depth.
- G100 Coating for General steel.

• ITEMS

Order No.	Thread SIZE	Diameter D1	Effective Length L3	O.A.L. L2	Shank Dia D2	Flute
EMTF 03P050	M3x0.5	2.35	6	50	6	3
EMTF 04P070	M4x0.7	3.10	8	50	6	3
EMTF 05P080	M5x0.8	3.80	12	50	6	3
EMTF 06P100	M6x1.0	4.65	14	50	6	3
EMTF 08P125	M8x1.25	5.95	18	50	6	3
EMTF 10P150	M10x1.5	7.80	25	60	8	3
EMTF 12P175	M12x1.75	9.00	25	75	10	3

unit: mm

Flute Length (L1) = Pitch x 3

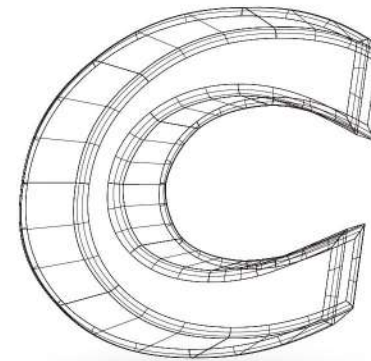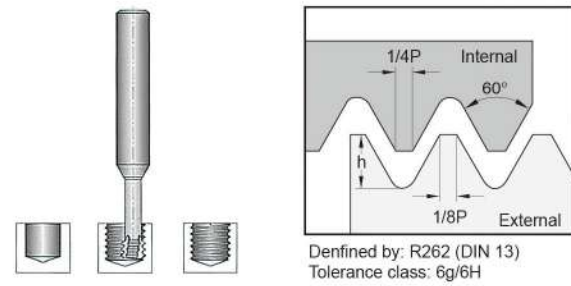

CHAMFERING SERIES

C.pro




C.pro

ECM

Chamfering series / 4 Flute / Straight Chamfering

MG 4 90° β HRC 55 TiAlN Finishing Semi-Finishing

H P K M S N

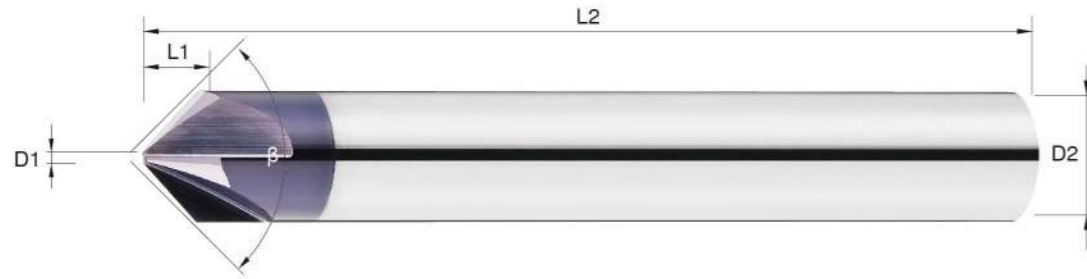

• FEATURES

- Straight Chamfering 4 Flute design to prevent sudden fracturing.
- Short chip breaker groove design can reduce vibration.

• ITEMS

Order No.	Tip Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
ECM 0104	1.0	1.5	50	4
ECM 0206	2.0	2.0	50	6
ECM 0208	2.0	3.0	60	8
ECM 0210	2.0	4.0	75	10
ECM 0212	2.0	5.0	75	12

unit: mm



C.pro

ECMP

Chamfering series / 4 Flute / Straight Chamfering

S MG 4 90° β HRC 55 i8 Finishing Semi-Finishing Cutting Data P.252

H P K M S N



• FEATURES

- Straight Chamfering 4 Flute design to prevent sudden fracturing.
- Unique chip breaker groove design brings effective chip removal.

• ITEMS

Order No.	Diameter D1	Tip Diameter D4	Flute Length L1	O.A.L. L2	Shank Dia D2
ECMP 0404	4.0	0.2	9	50	4
ECMP 0406	4.0	0.2	9	50	6
ECMP 0404B	4.0	0.2	9	100	4
ECMP 0606	6.0	0.2	12	50	6
ECMP 0606B	6.0	0.2	12	110	6
ECMP 0808	8.0	0.2	15	60	8
ECMP 0808B	8.0	0.2	15	110	8
ECMP 1010	10.0	0.2	16	75	10
ECMP 1010A	10.0	0.2	16	110	10
ECMP 1212	12.0	0.2	18	75	12

unit: mm

C


C.pro

ECMV

MG 3 90° HRC 55 i8 Finishing Cutting Data P.252

Chamfering series / 3 Flute / Straight Chamfering

H P K M S N

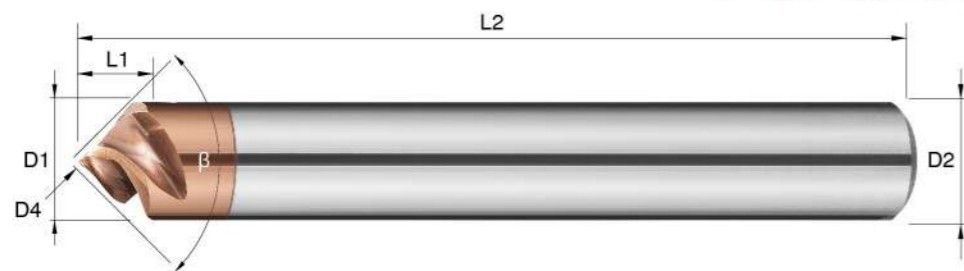

• FEATURES

- Sharp helix flute design with best helix angle brings good sharpness and prevent burrs occurring.
- End cutting edge design can do V-grooving and chamfering.

• ITEMS

Order No.	Diameter D1	Tip Diameter D4	Flute Length L1	O.A.L. L2	Shank Dia D2
ECMV 0404	4.0	0.2	1.5	50	4
ECMV 0406	4.0	0.2	1.5	50	6
ECMV 0606	6.0	0.2	2	50	6
ECMV 0808	8.0	0.2	3	60	8
ECMV 1010	10.0	0.2	4	75	10
ECMV 1212	12.0	0.2	5	75	12

C


C.pro

ECR

MG 2 HRC 55 Finishing Semi-Finishing

Chamfering series / 2 Flute / Corner Rounding

H P K M S N

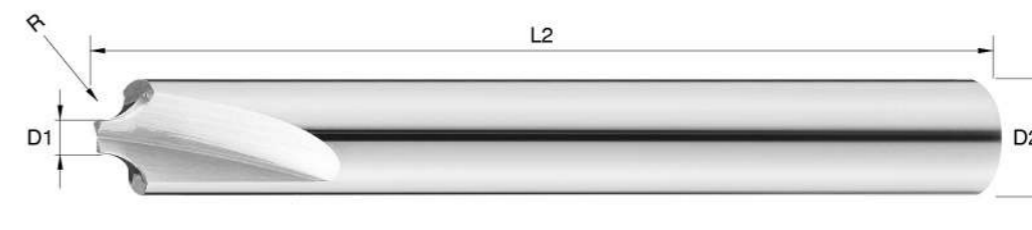


• FEATURES

- 2 Flute Corner Rounding for HRC55.
- Radius design can do chamfering R0.5 ~ R6.0.

• ITEMS

Order No.	Radius R	Pilot Diameter D1	O.A.L. L2	Shank Dia D2
ECR 0104	R0.5	1.5	50	4
ECR 0154	R0.75	1.5	50	4
ECR 0204	R1.0	1.5	50	4
ECR 0256	R1.25	1.5	50	6
ECR 0306	R1.5	1.5	50	6
ECR 0356	R1.75	1.5	50	6
ECR 0406	R2.0	1.5	50	6
ECR 0508	R2.5	1.5	60	8
ECR 0608	R3.0	1.5	60	8
ECR 0812	R4.0	2.0	75	12
ECR 1016	R5.0	3.0	100	16
ECR 1216	R6.0	3.0	100	16



C

EMCR

MG 2 HRC 55 Finishing Semi-Finishing

Chamfering series / 2 Flute / Micro Diameter Corner Rounding


H P K M S N


• FEATURES

- 2 Flute Micro Diameter Corner Rounding for HRC55.
- Radius design can do chamfering R0.25 ~ R0.45.

• ITEMS

Order No.	Radius R	Pilot Diameter D1	O.A.L. L2	Shank Dia D2
EMCR 0054	R0.25	1.1	50	4
EMCR 0064	R0.3	1.2	50	4
EMCR 0074	R0.35	1.3	50	4
EMCR 0084	R0.4	1.4	50	4
EMCR 0094	R0.45	1.5	50	4



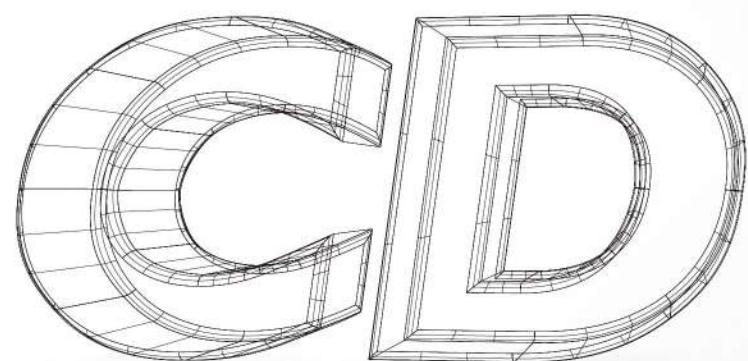

CARBIDE DRILLS SERIES

CD

CD


CD

ESD

MG 90° β HRC 40 Finishing Semi-Finishing

Carbide drills series / Spot Drills

H P K

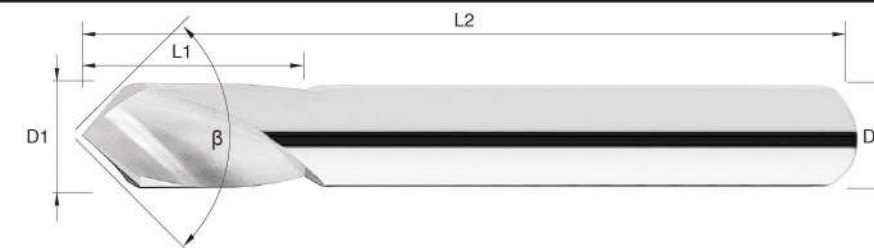

• FEATURES

- Point angles design brings outstanding hole position accuracy.
- Cutting edge design can do chamfering.

• ITEMS

Order No.	Diameter	Flute Length	O.A.L.	Shank Dia
	D1	L1	L2	D2
ESD 0303	3.0	6	50	3
ESD 0404	4.0	8	50	4
ESD 0606	6.0	12	50	6
ESD 0808	8.0	16	60	8
ESD 1010	10.0	20	75	10
ESD 1212	12.0	24	75	12
ESD 1616	16.0	30	100	16
ESD 2020	20.0	30	100	20

unit: mm

CD

ESD2

MG 120° β HRC 40 Finishing Semi-Finishing

Carbide drills series / Spot Drills

H P K

• FEATURES

- Point angles design brings outstanding hole position accuracy.
- Cutting edge design can do chamfering.

• ITEMS

Order No.	Diameter	Flute Length	O.A.L.	Shank Dia
	D1	L1	L2	D2
ESD2 0303	3.0	6	50	3
ESD2 0404	4.0	8	50	4
ESD2 0606	6.0	12	50	6
ESD2 0808	8.0	16	60	8
ESD2 1010	10.0	20	75	10
ESD2 1212	12.0	24	75	12
ESD2 1616	16.0	30	100	16
ESD2 2020	20.0	30	100	20

unit: mm

CD


CD

ESDC

MG 90° β HRC 40 TiAlN Finishing Semi-Finishing

Carbide drills series / Spot Drills

H P K

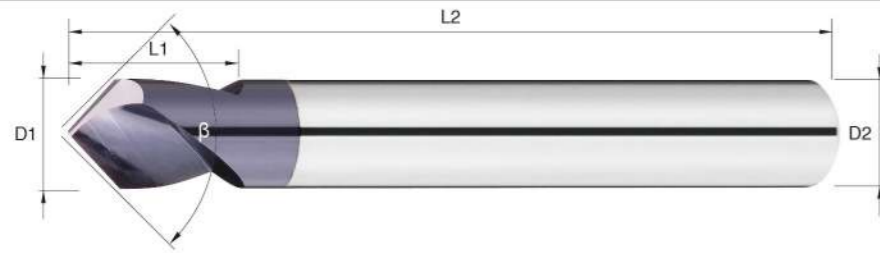

• FEATURES

- Point angles design brings outstanding hole position accuracy.
- Cutting edge design can do chamfering.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
ESDC 0303	3.0	6	50	3
ESDC 0404	4.0	8	50	4
ESDC 0606	6.0	12	50	6
ESDC 0808	8.0	16	60	8
ESDC 1010	10.0	20	75	10
ESDC 1212	12.0	24	75	12
ESDC 1616	16.0	30	100	16
ESDC 2020	20.0	30	100	20

unit: mm

CD


CD

ESDS

MG 90° β HRC 40 TiAlN Finishing Semi-Finishing

Carbide drills series / Long Shank Spot Drills

H P K

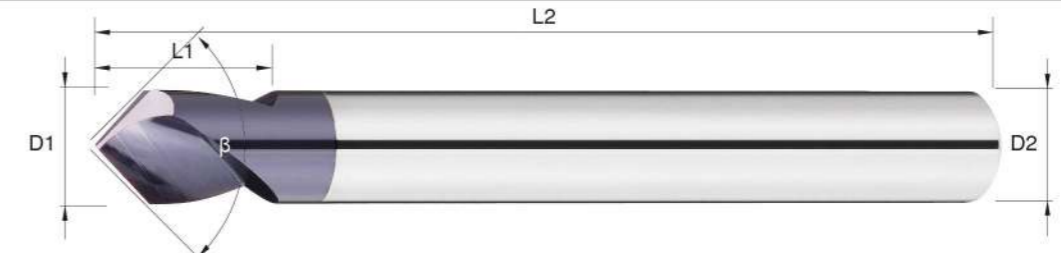

• FEATURES

- Point angles design brings outstanding hole position accuracy.
- Cutting edge design can do chamfering.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
ESDS 0606	6.0	12	100	6
ESDS 0808	8.0	16	100	8
ESDS 1010	10.0	20	100	10
ESDS 1212	12.0	24	100	12
ESDS 1616	16.0	30	150	16
ESDS 2020	20.0	30	150	20

unit: mm

CD

ESDA

MG 120° β HRC 40 TiAlN Finishing Semi-Finishing

Carbide drills series / Spot Drills

H P K

• FEATURES

- Point angles design brings outstanding hole position accuracy.
- Cutting edge design can do chamfering.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
ESDA 0303	3.0	6	50	3
ESDA 0404	4.0	8	50	4
ESDA 0606	6.0	12	50	6
ESDA 0808	8.0	16	60	8
ESDA 1010	10.0	20	75	10
ESDA 1212	12.0	24	75	12
ESDA 1616	16.0	30	100	16
ESDA 2020	20.0	30	100	20

unit: mm

CD

ESDL

MG 120° β HRC 40 TiAlN Finishing Semi-Finishing

Carbide drills series / Long Shank Spot Drills

H P K

• FEATURES

- Point angles design brings outstanding hole position accuracy.
- Cutting edge design can do chamfering.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
ESDL 0606	6.0	12	100	6
ESDL 0808	8.0	16	100	8
ESDL 1010	10.0	20	100	10
ESDL 1212	12.0	24	100	12
ESDL 1616	16.0	30	150	16
ESDL 2020	20.0	30	150	20

unit: mm


CD

CD

CCD

Carbide drills series / Center Drills

H P K

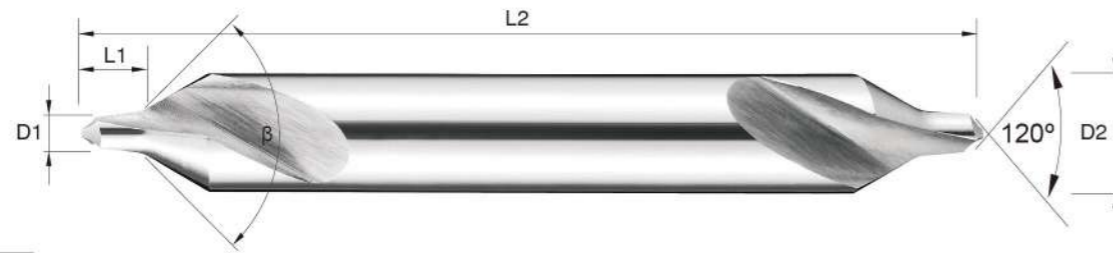

• FEATURES

- Point angles design brings outstanding location and hole position accuracy.
- 0.6µm Carbide material with excellent toughness.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
CCD 0050	0.50	0.8	38	3
CCD 0080	0.80	1.1	38	3
CCD 0100	1.00	1.3	38	3
CCD 0125	1.25	1.6	38	3
CCD 0160	1.60	2.0	38	4
CCD 0200	2.00	2.5	50	5
CCD 0250	2.50	3.1	50	6
CCD 0315	3.15	3.9	60	8
CCD 0400	4.00	5.0	75	10
CCD 0500	5.00	6.3	75	12

unit: mm

CD

CCDA

Carbide drills series / Center Drills

H P K

• FEATURES

- Point angles design brings outstanding location and hole position accuracy.
- 0.6µm Carbide material with excellent toughness.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
CCDA 0050	0.50	0.8	38	3
CCDA 0080	0.80	1.1	38	3
CCDA 0100	1.00	1.3	38	3
CCDA 0125	1.25	1.6	38	3
CCDA 0160	1.60	2.0	38	4
CCDA 0200	2.00	2.5	50	5
CCDA 0250	2.50	3.1	50	6
CCDA 0315	3.15	3.9	60	8
CCDA 0400	4.00	5.0	75	10
CCDA 0500	5.00	6.3	75	12

unit: mm


CD

CD

CD

Carbide drills series / Carbide Drills

H P K

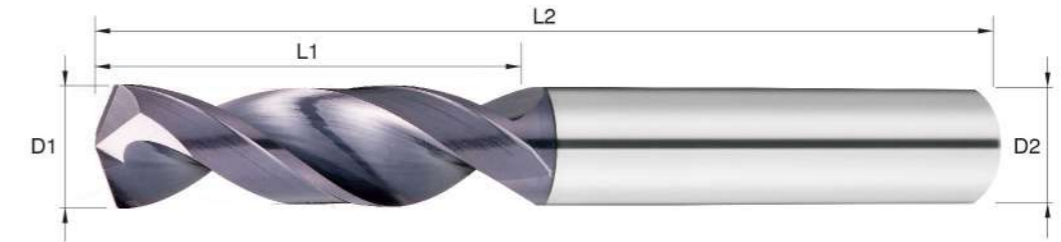

• FEATURES

- Allow stable chip formation to prevent cutting edge from cracking.
- Special flute shape design can make chips into small pieces and remove chips quickly.

Order No.	Dia D1	Flute Length L1	O.A.L. L2	Order No.	Dia D1	Flute Length L1	O.A.L. L2	Order No.	Dia D1	Flute Length L1	O.A.L. L2
CD 020	2.0	12	38	CD 055	5.5	28	66	CD 090	9.0	40	84
CD 021	2.1	12	38	CD 056	5.6	28	66	CD 091	9.1	40	84
CD 022	2.2	13	40	CD 057	5.7	28	66	CD 092	9.2	40	84
CD 023	2.3	13	40	CD 058	5.8	28	66	CD 093	9.3	40	84
CD 024	2.4	14	43	CD 059	5.9	28	66	CD 094	9.4	40	84
CD 025	2.5	14	43	CD 060	6.0	28	66	CD 095	9.5	40	84
CD 026	2.6	14	43	CD 061	6.1	31	70	CD 096	9.6	43	89
CD 027	2.7	16	46	CD 062	6.2	31	70	CD 097	9.7	43	89
CD 028	2.8	16	46	CD 063	6.3	31	70	CD 098	9.8	43	89
CD 029	2.9	16	46	CD 064	6.4	31	70	CD 099	9.9	43	89
CD 030	3.0	16	46	CD 065	6.5	31	70	CD 100	10.0	43	89
CD 031	3.1	18	49	CD 066	6.6	31	70	CD 102	10.2	43	89
CD 032	3.2	18	49	CD 067	6.7	31	70	CD 105	10.5	43	89
CD 033	3.3	18	49	CD 068	6.8	34	74	CD 110	11.0	47	95
CD 034	3.4	20	52	CD 069	6.9	34	74	CD 115	11.5	47	95
CD 035	3.5	20	52	CD 070	7.0	34	74	CD 120	12.0	51	102
CD 036	3.6	20	52	CD 071	7.1	34	74	CD 125	12.5	51	102
CD 037	3.7	20	52	CD 072	7.2	34	74	CD 130	13.0	51	102
CD 038	3.8	22	55	CD 073	7.3	34	74				
CD 039	3.9	22	55	CD 074	7.4	34	74				
CD 040	4.0	22	55	CD 075	7.5	34	74				
CD 041	4.1	22	55	CD 076	7.6	37	79				
CD 042	4.2	22	55	CD 077	7.7	37	79				
CD 043	4.3	24	58	CD 078	7.8	37	79				
CD 044	4.4	24	58	CD 079	7.9	37	79				
CD 045	4.5	24	58	CD 080	8.0	37	79				
CD 046	4.6	24	58	CD 081	8.1	37	79				
CD 047	4.7	24	58	CD 082	8.2	37	79				
CD 048	4.8	26	62	CD 083	8.3	37	79				
CD 049	4.9	26	62	CD 084	8.4	37	79				
CD 050	5.0	26	62	CD 085	8.5	37	79				
CD 051	5.1	26	62	CD 086	8.6	40	84				
CD 052	5.2	26	62	CD 087	8.7	40	84				
CD 053	5.3	26	62	CD 088	8.8	40	84				
CD 054	5.4	28	66	CD 089	8.9	40	84				


unit: mm

CDA

Carbide drills series / Carbide Drills



H P K

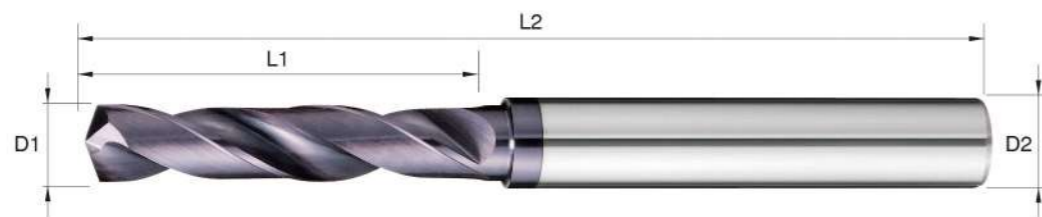

• FEATURES

- Allow stable chip formation to prevent cutting edge from cracking.
- Special flute shape design can make chips into small pieces and remove chips quickly.

Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2	Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2	Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2
CDA 030	3.0	20	62	6.0	CDA 065	6.5	34	79	8.0	CDA 100	10.0	47	89	10.0
CDA 031	3.1	20	62	6.0	CDA 066	6.6	34	79	8.0	CDA 101	10.1	55	102	12.0
CDA 032	3.2	20	62	6.0	CDA 067	6.7	34	79	8.0	CDA 102	10.2	55	102	12.0
CDA 033	3.3	20	62	6.0	CDA 068	6.8	34	79	8.0	CDA 103	10.3	55	102	12.0
CDA 034	3.4	20	62	6.0	CDA 069	6.9	34	79	8.0	CDA 104	10.4	55	102	12.0
CDA 035	3.5	20	62	6.0	CDA 070	7.0	34	79	8.0	CDA 105	10.5	55	102	12.0
CDA 036	3.6	20	62	6.0	CDA 071	7.1	41	79	8.0	CDA 106	10.6	55	102	12.0
CDA 037	3.7	20	62	6.0	CDA 072	7.2	41	79	8.0	CDA 107	10.7	55	102	12.0
CDA 038	3.8	24	66	6.0	CDA 073	7.3	41	79	8.0	CDA 108	10.8	55	102	12.0
CDA 039	3.9	24	66	6.0	CDA 074	7.4	41	79	8.0	CDA 109	10.9	55	102	12.0
CDA 040	4.0	24	66	6.0	CDA 075	7.5	41	79	8.0	CDA 110	11.0	55	102	12.0
CDA 041	4.1	24	66	6.0	CDA 076	7.6	41	79	8.0	CDA 111	11.1	55	102	12.0
CDA 042	4.2	24	66	6.0	CDA 077	7.7	41	79	8.0	CDA 112	11.2	55	102	12.0
CDA 043	4.3	24	66	6.0	CDA 078	7.8	41	79	8.0	CDA 113	11.3	55	102	12.0
CDA 044	4.4	24	66	6.0	CDA 079	7.9	41	79	8.0	CDA 114	11.4	55	102	12.0
CDA 045	4.5	24	66	6.0	CDA 080	8.0	41	79	8.0	CDA 115	11.5	55	102	12.0
CDA 046	4.6	24	66	6.0	CDA 081	8.1	47	89	10.0	CDA 116	11.6	55	102	12.0
CDA 047	4.7	24	66	6.0	CDA 082	8.2	47	89	10.0	CDA 117	11.7	55	102	12.0
CDA 048	4.8	28	66	6.0	CDA 083	8.3	47	89	10.0	CDA 118	11.8	55	102	12.0
CDA 049	4.9	28	66	6.0	CDA 084	8.4	47	89	10.0	CDA 119	11.9	55	102	12.0
CDA 050	5.0	28	66	6.0	CDA 085	8.5	47	89	10.0	CDA 120	12.0	55	102	12.0
CDA 051	5.1	28	66	6.0	CDA 086	8.6	47	89	10.0	CDA 125	12.5	60	107	14.0
CDA 052	5.2	28	66	6.0	CDA 087	8.7	47	89	10.0	CDA 130	13.0	60	107	14.0
CDA 053	5.3	28	66	6.0	CDA 088	8.8	47	89	10.0	CDA 135	13.5	60	107	14.0
CDA 054	5.4	28	66	6.0	CDA 089	8.9	47	89	10.0	CDA 140	14.0	60	107	14.0
CDA 055	5.5	28	66	6.0	CDA 090	9.0	47	89	10.0	CDA 145	14.5	65	115	16.0
CDA 056	5.6	28	66	6.0	CDA 091	9.1	47	89	10.0	CDA 150	15.0	65	115	16.0
CDA 057	5.7	28	66	6.0	CDA 092	9.2	47	89	10.0	CDA 155	15.5	65	115	16.0
CDA 058	5.8	28	66	6.0	CDA 093	9.3	47	89	10.0	CDA 160	16.0	65	115	16.0
CDA 059	5.9	28	66	6.0	CDA 094	9.4	47	89	10.0	CDA 165	16.5	73	123	18.0
CDA 060	6.0	28	66	6.0	CDA 095	9.5	47	89	10.0	CDA 170	17.0	73	123	18.0
CDA 061	6.1	34	79	8.0	CDA 096	9.6	47	89	10.0	CDA 175	17.5	73	123	18.0
CDA 062	6.2	34	79	8.0	CDA 097	9.7	47	89	10.0	CDA 180	18.0	73	123	18.0
CDA 063	6.3	34	79	8.0	CDA 098	9.8	47	89	10.0	CDA 185	18.5	79	131	20.0
CDA 064	6.4	34	79	8.0	CDA 099	9.9	47	89	10.0	CDA 190	19.0	79	131	20.0
										CDA 195	19.5	79	131	20.0
										CDA 200	20.0	79	131	20.0

CDB

Carbide drills series / Carbide Drills



H P K



• FEATURES

- Allow stable chip formation to prevent cutting edge from cracking.
- Special flute shape design can make chips into small pieces and remove chips quickly.

Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2	Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2	Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2
CDB 030	3.0	28	66	6.0	CDB 065	6.5	53	91	8.0	CDB 100	10.0	61	103	10.0
CDB 031	3.1	28	66	6.0	CDB 066	6.6	53	91	8.0	CDB 101	10.1	71	118	12.0
CDB 032	3.2	28	66	6.0	CDB 067	6.7	53	91	8.0	CDB 102	10.2	71	118	12.0
CDB 033	3.3	28	66	6.0	CDB 068	6.8	53	91	8.0	CDB 103	10.3	71	118	12.0
CDB 034	3.4	28	66	6.0	CDB 069	6.9	53	91	8.0	CDB 104	10.4	71	118	12.0
CDB 035	3.5	28	66	6.0	CDB 070	7.0	53	91	8.0	CDB 105	10.5	71	118	12.0
CDB 036	3.6	28	66	6.0	CDB 071	7.1	53	91	8.0	CDB 106	10.6	71	118	12.0
CDB 037	3.7	28	66	6.0	CDB 072	7.2	53	91	8.0	CDB 107	10.7	71	118	12.0
CDB 038	3.8	36	74	6.0	CDB 073	7.3	53	91	8.0	CDB 108	10.8	71	118	12.0
CDB 039	3.9	36	74	6.0	CDB 074	7.4	53	91	8.0	CDB 109	10.9	71	118	12.0
CDB 040	4.0	36	74	6.0	CDB 075	7.5	53	91	8.0	CDB 110	11.0	71	118	12.0
CDB 041	4.1	36	74	6.0	CDB 076	7.6	53	91	8.0	CDB 111	11.1	71	118	12.0
CDB 042	4.2	36	74	6.0	CDB 077	7.7	53	91	8.0	CDB 112	11.2	71	118	12.0
CDB 043	4.3	36	74	6.0	CDB 078	7.8	53	91	8.0	CDB 113	11.3	71	118	12.0
CDB 044	4.4	36	74	6.0	CDB 079	7.9	53	91	8.0	CDB 114	11.4	71	118	12.0
CDB 045	4.5	36	74	6.0	CDB 080	8.0	53	91	8.0	CDB 115	11.5	71	118	12.0
CDB 046	4.6	36	74	6.0	CDB 081	8.1	61	103	10.0	CDB 116	11.6	71	118	12.0
CDB 047	4.7	36	74	6.0	CDB 082	8.2	61	103	10.0	CDB 117	11.7	71	118	12.0
CDB 048	4.8	44	82	6.0	CDB 083	8.3	61	103	10.0	CDB 118	11.8	71	118	12.0
CDB 049	4.9	44	82	6.0	CDB 084	8.4	61	103	10.0	CDB 119	11.9	71	118	12.0
CDB 050	5.0	44	82	6.0	CDB 085	8.5	61	103	10.0	CDB 120	12.0	71	118	12.0
CDB 051	5.1	44	82	6.0	CDB 086	8.6	61	103	10.0	CDB 125	12.5	77	124	14.0
CDB 052	5.2	44	82	6.0	CDB 087	8.7	61	103	10.0	CDB 130	13.0	77	124	14.0
CDB 053	5.3	44	82	6.0	CDB 088	8.8	61	103	10.0	CDB 135	13.5	77	124	14.0
CDB 054	5.4	44	82	6.0	CDB 089	8.9	61	103	10.0	CDB 140	14.0	77	124	14.0
CDB 055	5.5	44	82	6.0	CDB 090	9.0	61	103	10.0	CDB 145	14.5	83	133	16.0
CDB 056	5.6	44	82	6.0	CDB 091	9.1	61	103	10.0	CDB 150	15.0	83	133	16.0
CDB 057	5.7	44	82	6.0	CDB 092	9.2	61	103	10.0	CDB 155	15.5	83	133	16.0
CDB 058	5.8	44	82	6.0	CDB 093	9.3	61	103	10.0	CDB 160	16.0	83	133	16.0
CDB 059	5.9	44	82	6.0	CDB 094	9.4	61	103	10.0	CDB 165	16.5	93	143	18.0
CDB 060	6.0	44	82	6.0	CDB 095	9.5	61	103	10.0	CDB 170	17.0	93	143	18.0
CDB 061	6.1	53	91	8.0	CDB 096	9.6	61	103	10.0	CDB 175	17.5	93	143	18.0
CDB 062	6.2	53	91	8.0	CDB 097	9.7	61	103	10.0	CDB 180	18.0	93	143	18.0
CDB 063	6.3	53	91	8.0	CDB 098	9.8	61	103	10.0	CDB 185	18.5	101	153	20.0
CDB 064	6.4	53	91	8.0	CDB 099	9.9	61	103	10.0	CDB 190	19.0	101	153	20.0
										CDB 195	19.5	101	153	20.0
										CDB 200	20.0	101	153	20.0

CDC

MG DIN 6537 30° h6 h7 140° TiAlN 8xD Finishing Semi-Finishing Cutting Data P.253

Carbide drills series / Carbide Drills

H P K



• FEATURES

- Allow stable chip formation to prevent cutting edge from cracking.
- Special flute shape design can make chips into small pieces and remove chips quickly.


Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2	Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2	Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2
CDC 030	3.0	34	72	6.0	CDC 065	6.5	76	114	8.0	CDC 100	10.0	95	142	10.0
CDC 031	3.1	34	72	6.0	CDC 066	6.6	76	114	8.0	CDC 101	10.1	114	162	12.0
CDC 032	3.2	34	72	6.0	CDC 067	6.7	76	114	8.0	CDC 102	10.2	114	162	12.0
CDC 033	3.3	34	72	6.0	CDC 068	6.8	76	114	8.0	CDC 103	10.3	114	162	12.0
CDC 034	3.4	34	72	6.0	CDC 069	6.9	76	114	8.0	CDC 104	10.4	114	162	12.0
CDC 035	3.5	34	72	6.0	CDC 070	7.0	76	114	8.0	CDC 105	10.5	114	162	12.0
CDC 036	3.6	34	72	6.0	CDC 071	7.1	76	114	8.0	CDC 106	10.6	114	162	12.0
CDC 037	3.7	34	72	6.0	CDC 072	7.2	76	114	8.0	CDC 107	10.7	114	162	12.0
CDC 038	3.8	43	81	6.0	CDC 073	7.3	76	114	8.0	CDC 108	10.8	114	162	12.0
CDC 039	3.9	43	81	6.0	CDC 074	7.4	76	114	8.0	CDC 109	10.9	114	162	12.0
CDC 040	4.0	43	81	6.0	CDC 075	7.5	76	114	8.0	CDC 110	11.0	114	162	12.0
CDC 041	4.1	43	81	6.0	CDC 076	7.6	76	114	8.0	CDC 111	11.1	114	162	12.0
CDC 042	4.2	43	81	6.0	CDC 077	7.7	76	114	8.0	CDC 112	11.2	114	162	12.0
CDC 043	4.3	43	81	6.0	CDC 078	7.8	76	114	8.0	CDC 113	11.3	114	162	12.0
CDC 044	4.4	43	81	6.0	CDC 079	7.9	76	114	8.0	CDC 114	11.4	114	162	12.0
CDC 045	4.5	43	81	6.0	CDC 080	8.0	76	114	8.0	CDC 115	11.5	114	162	12.0
CDC 046	4.6	43	81	6.0	CDC 081	8.1	95	142	10.0	CDC 116	11.6	114	162	12.0
CDC 047	4.7	43	81	6.0	CDC 082	8.2	95	142	10.0	CDC 117	11.7	114	162	12.0
CDC 048	4.8	57	95	6.0	CDC 083	8.3	95	142	10.0	CDC 118	11.8	114	162	12.0
CDC 049	4.9	57	95	6.0	CDC 084	8.4	95	142	10.0	CDC 119	11.9	114	162	12.0
CDC 050	5.0	57	95	6.0	CDC 085	8.5	95	142	10.0	CDC 120	12.0	114	162	12.0
CDC 051	5.1	57	95	6.0	CDC 086	8.6	95	142	10.0					
CDC 052	5.2	57	95	6.0	CDC 087	8.7	95	142	10.0					
CDC 053	5.3	57	95	6.0	CDC 088	8.8	95	142	10.0					
CDC 054	5.4	57	95	6.0	CDC 089	8.9	95	142	10.0					
CDC 055	5.5	57	95	6.0	CDC 090	9.0	95	142	10.0					
CDC 056	5.6	57	95	6.0	CDC 091	9.1	95	142	10.0					
CDC 057	5.7	57	95	6.0	CDC 092	9.2	95	142	10.0					
CDC 058	5.8	57	95	6.0	CDC 093	9.3	95	142	10.0					
CDC 059	5.9	57	95	6.0	CDC 094	9.4	95	142	10.0					
CDC 060	6.0	57	95	6.0	CDC 095	9.5	95	142	10.0					
CDC 061	6.1	76	114	8.0	CDC 096	9.6	95	142	10.0					
CDC 062	6.2	76	114	8.0	CDC 097	9.7	95	142	10.0					
CDC 063	6.3	76	114	8.0	CDC 098	9.8	95	142	10.0					
CDC 064	6.4	76	114	8.0	CDC 099	9.9	95	142	10.0					

CDAC

MG DIN 6537 30° h6 h7 140° i8 3xD Finishing Semi-Finishing Cutting Data P.253

Carbide drills series / Internal coolant / Carbide Drills

H P K

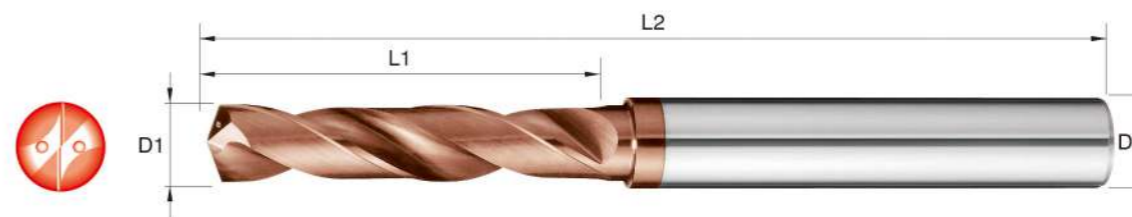

• FEATURES

- Allow stable chip formation to prevent cutting edge from cracking.
- Special flute shape design can make chips into small pieces and remove chips quickly.
- Double helix coolant hole to bring down machining temperature and help chip removal.


Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2	Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2	Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2
CDAC 030	3.0	20	62	6.0	CDAC 065	6.5	34	79	8.0	CDAC 100	10.0	47	89	10.0
CDAC 031	3.1	20	62	6.0	CDAC 066	6.6	34	79	8.0	CDAC 101	10.1	55	102	12.0
CDAC 032	3.2	20	62	6.0	CDAC 067	6.7	34	79	8.0	CDAC 102	10.2	55	102	12.0
CDAC 033	3.3	20	62	6.0	CDAC 068	6.8	34	79	8.0	CDAC 103	10.3	55	102	12.0
CDAC 034	3.4	20	62	6.0	CDAC 069	6.9	34	79	8.0	CDAC 104	10.4	55	102	12.0
CDAC 035	3.5	20	62	6.0	CDAC 070	7.0	34	79	8.0	CDAC 105	10.5	55	102	12.0
CDAC 036	3.6	20	62	6.0	CDAC 071	7.1	41	79	8.0	CDAC 106	10.6	55	102	12.0
CDAC 037	3.7	20	62	6.0	CDAC 072	7.2	41	79	8.0	CDAC 107	10.7	55	102	12.0
CDAC 038	3.8	24	66	6.0	CDAC 073	7.3	41	79	8.0	CDAC 108	10.8	55	102	12.0
CDAC 039	3.9	24	66	6.0	CDAC 074	7.4	41	79	8.0	CDAC 109	10.9	55	102	12.0
CDAC 040	4.0	24	66	6.0	CDAC 075	7.5	41	79	8.0	CDAC 110	11.0	55	102	12.0
CDAC 041	4.1	24	66	6.0	CDAC 076	7.6	41	79	8.0	CDAC 111	11.1	55	102	12.0
CDAC 042	4.2	24	66	6.0	CDAC 077	7.7	41	79	8.0	CDAC 112	11.2	55	102	12.0
CDAC 043	4.3	24	66	6.0	CDAC 078	7.8	41	79	8.0	CDAC 113	11.3	55	102	12.0
CDAC 044	4.4	24	66	6.0	CDAC 079	7.9	41	79	8.0	CDAC 114	11.4	55	102	12.0
CDAC 045	4.5	24	66	6.0	CDAC 080	8.0	41	79	8.0	CDAC 115	11.5	55	102	12.0
CDAC 046	4.6	24	66	6.0	CDAC 081	8.1	47	89	10.0	CDAC 116	11.6	55	102	12.0
CDAC 047	4.7	24	66	6.0	CDAC 082	8.2	47	89	10.0	CDAC 117	11.7	55	102	12.0
CDAC 048	4.8	28	66	6.0	CDAC 083	8.3	47	89	10.0	CDAC 118	11.8	55	102	12.0
CDAC 049	4.9	28	66	6.0	CDAC 084	8.4	47	89	10.0	CDAC 119	11.9	55	102	12.0
CDAC 050	5.0	28	66	6.0	CDAC 085	8.5	47	89	10.0	CDAC 120	12.0	55	102	12.0
CDAC 051	5.1	28	66	6.0	CDAC 086	8.6	47	89	10.0	CDAC 125	12.5	60	107	14.0
CDAC 052	5.2	28	66	6.0	CDAC 087	8.7	47	89	10.0	CDAC 130	13.0	60	107	14.0
CDAC 053	5.3	28	66	6.0	CDAC 088	8.8	47	89	10.0	CDAC 135	13.5	60	107	14.0
CDAC 054	5.4	28	66	6.0	CDAC 089	8.9	47	89	10.0	CDAC 140	14.0	60	107	14.0
CDAC 055	5.5	28	66	6.0	CDAC 090	9.0	47	89	10.0	CDAC 145	14.5	65	115	16.0
CDAC 056	5.6	28	66	6.0	CDAC 091	9.1	47	89	10.0	CDAC 150	15.0	65	115	16.0
CDAC 057	5.7	28	66	6.0	CDAC 092	9.2	47	89	10.0	CDAC 155	15.5	65	115	16.0
CDAC 058	5.8	28	66	6.0	CDAC 093	9.3	47	89	10.0	CDAC 160	16.0	65	115	16.0
CDAC 059	5.9	28	66	6.0	CDAC 094	9.4	47	89	10.0	CDAC 165	16.5	73	123	18.0
CDAC 060	6.0	28	66	6.0	CDAC 095	9.5	47	89	10.0	CDAC 170	17.0	73	123	18.0
CDAC 061	6.1	34	79	8.0	CDAC 096	9.6	47	89	10.0	CDAC 175	17.5	73	123	18.0
CDAC 062	6.2	34	79	8.0	CDAC 097	9.7	47	89	10.0	CDAC 180	18.0	73	123	18.0
CDAC 063	6.3	34	79	8.0	CDAC 098	9.8	47	89	10.0	CDAC 185	18.5	79	131	20.0
CDAC 064	6.4	34	79	8.0	CDAC 099	9.9	47	89	10.0	CDAC 190	19.0	79	131	20.0
										CDAC 195	19.5	79	131	20.0
										CDAC 200	20.0	79	131	20.0

CDBC

MG DIN 6537 30° h6 h7 140° i8 5xD Finishing Semi-Finishing Cutting Data P.253

Carbide drills series / Internal coolant / Carbide Drills

H P K

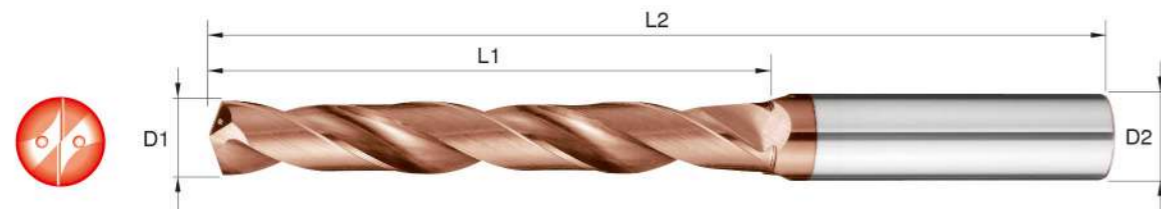

• FEATURES

- Allow stable chip formation to prevent cutting edge from cracking.
- Special flute shape design can make chips into small pieces and remove chips quickly.
- Double helix coolant hole to bring down machining temperature and help chip removal.

unit: mm


Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2	Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2	Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2
CDBC 030	3.0	28	66	6.0	CDBC 065	6.5	53	91	8.0	CDBC 100	10.0	61	103	10.0
CDBC 031	3.1	28	66	6.0	CDBC 066	6.6	53	91	8.0	CDBC 101	10.1	71	118	12.0
CDBC 032	3.2	28	66	6.0	CDBC 067	6.7	53	91	8.0	CDBC 102	10.2	71	118	12.0
CDBC 033	3.3	28	66	6.0	CDBC 068	6.8	53	91	8.0	CDBC 103	10.3	71	118	12.0
CDBC 034	3.4	28	66	6.0	CDBC 069	6.9	53	91	8.0	CDBC 104	10.4	71	118	12.0
CDBC 035	3.5	28	66	6.0	CDBC 070	7.0	53	91	8.0	CDBC 105	10.5	71	118	12.0
CDBC 036	3.6	28	66	6.0	CDBC 071	7.1	53	91	8.0	CDBC 106	10.6	71	118	12.0
CDBC 037	3.7	28	66	6.0	CDBC 072	7.2	53	91	8.0	CDBC 107	10.7	71	118	12.0
CDBC 038	3.8	36	74	6.0	CDBC 073	7.3	53	91	8.0	CDBC 108	10.8	71	118	12.0
CDBC 039	3.9	36	74	6.0	CDBC 074	7.4	53	91	8.0	CDBC 109	10.9	71	118	12.0
CDBC 040	4.0	36	74	6.0	CDBC 075	7.5	53	91	8.0	CDBC 110	11.0	71	118	12.0
CDBC 041	4.1	36	74	6.0	CDBC 076	7.6	53	91	8.0	CDBC 111	11.1	71	118	12.0
CDBC 042	4.2	36	74	6.0	CDBC 077	7.7	53	91	8.0	CDBC 112	11.2	71	118	12.0
CDBC 043	4.3	36	74	6.0	CDBC 078	7.8	53	91	8.0	CDBC 113	11.3	71	118	12.0
CDBC 044	4.4	36	74	6.0	CDBC 079	7.9	53	91	8.0	CDBC 114	11.4	71	118	12.0
CDBC 045	4.5	36	74	6.0	CDBC 080	8.0	53	91	8.0	CDBC 115	11.5	71	118	12.0
CDBC 046	4.6	36	74	6.0	CDBC 081	8.1	61	103	10.0	CDBC 116	11.6	71	118	12.0
CDBC 047	4.7	36	74	6.0	CDBC 082	8.2	61	103	10.0	CDBC 117	11.7	71	118	12.0
CDBC 048	4.8	44	82	6.0	CDBC 083	8.3	61	103	10.0	CDBC 118	11.8	71	118	12.0
CDBC 049	4.9	44	82	6.0	CDBC 084	8.4	61	103	10.0	CDBC 119	11.9	71	118	12.0
CDBC 050	5.0	44	82	6.0	CDBC 085	8.5	61	103	10.0	CDBC 120	12.0	71	118	12.0
CDBC 051	5.1	44	82	6.0	CDBC 086	8.6	61	103	10.0	CDBC 125	12.5	77	124	14.0
CDBC 052	5.2	44	82	6.0	CDBC 087	8.7	61	103	10.0	CDBC 130	13.0	77	124	14.0
CDBC 053	5.3	44	82	6.0	CDBC 088	8.8	61	103	10.0	CDBC 135	13.5	77	124	14.0
CDBC 054	5.4	44	82	6.0	CDBC 089	8.9	61	103	10.0	CDBC 140	14.0	77	124	14.0
CDBC 055	5.5	44	82	6.0	CDBC 090	9.0	61	103	10.0	CDBC 145	14.5	83	133	16.0
CDBC 056	5.6	44	82	6.0	CDBC 091	9.1	61	103	10.0	CDBC 150	15.0	83	133	16.0
CDBC 057	5.7	44	82	6.0	CDBC 092	9.2	61	103	10.0	CDBC 155	15.5	83	133	16.0
CDBC 058	5.8	44	82	6.0	CDBC 093	9.3	61	103	10.0	CDBC 160	16.0	83	133	16.0
CDBC 059	5.9	44	82	6.0	CDBC 094	9.4	61	103	10.0	CDBC 165	16.5	93	143	18.0
CDBC 060	6.0	44	82	6.0	CDBC 095	9.5	61	103	10.0	CDBC 170	17.0	93	143	18.0
CDBC 061	6.1	53	91	8.0	CDBC 096	9.6	61	103	10.0	CDBC 175	17.5	93	143	18.0
CDBC 062	6.2	53	91	8.0	CDBC 097	9.7	61	103	10.0	CDBC 180	18.0	93	143	18.0
CDBC 063	6.3	53	91	8.0	CDBC 098	9.8	61	103	10.0	CDBC 185	18.5	101	153	20.0
CDBC 064	6.4	53	91	8.0	CDBC 099	9.9	61	103	10.0	CDBC 190	19.0	101	153	20.0
										CDBC 195	19.5	101	153	20.0
										CDBC 200	20.0	101	153	20.0

CDCC

MG DIN 6537 30° h6 h7 140° i8 8xD Finishing Semi-Finishing Cutting Data P.253

Carbide drills series / Internal coolant / Carbide Drills

H P K

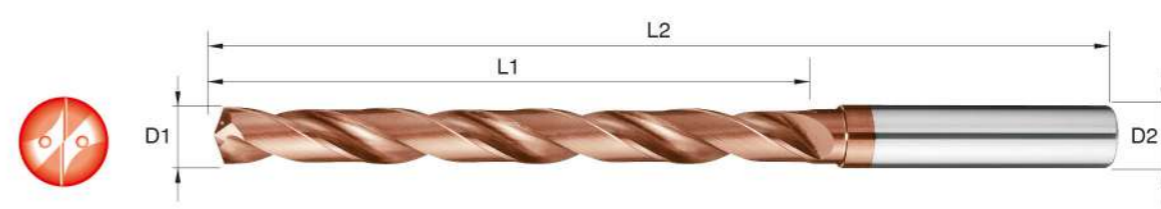


• FEATURES

- Allow stable chip formation to prevent cutting edge from cracking.
- Special flute shape design can make chips into small pieces and remove chips quickly.
- Double helix coolant hole to bring down machining temperature and help chip removal.

• ITEMS

unit: mm

Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2	Order No.	Dia D1	Flute Length L1	Overall Length L2	Shank Dia D2
CDCC 030	3.0	34	72	6.0	CDCC 065	6.5	76	114	8.0
CDCC 031	3.1	34	72	6.0	CDCC 066	6.6	76	114	8.0
CDCC 032	3.2	34	72	6.0	CDCC 067	6.7	76	114	8.0
CDCC 033	3.3	34	72	6.0	CDCC 068	6.8	76	114	8.0
CDCC 034	3.4	34	72	6.0	CDCC 069	6.9	76	114	8.0
CDCC 035	3.5	34	72	6.0	CDCC 070	7.0	76	114	8.0
CDCC 036	3.6	34	72	6.0	CDCC 071	7.1	76	114	8.0
CDCC 037	3.7	34	72	6.0	CDCC 072	7.2	76	114	8.0
CDCC 038	3.8	43	81	6.0	CDCC 073	7.3	76	114	8.0
CDCC 039	3.9	43	81	6.0	CDCC 074	7.4	76	114	8.0
CDCC 040	4.0	43	81	6.0	CDCC 075	7.5	76	114	8.0
CDCC 041	4.1	43	81	6.0	CDCC 076	7.6	76	114	8.0
CDCC 042	4.2	43	81	6.0	CDCC 077	7.7	76	114	8.0
CDCC 043	4.3	43	81	6.0	CDCC 078	7.8	76	114	8.0
CDCC 044	4.4	43	81	6.0	CDCC 079	7.9	76	114	8.0
CDCC 045	4.5	43	81	6.0	CDCC 080	8.0	76	114	8.0
CDCC 046	4.6	43	81	6.0	CDCC 081	8.1	95	142	10.0
CDCC 047	4.7	43	81	6.0	CDCC 082	8.2	95	142	10.0
CDCC 048	4.8	57	95	6.0	CDCC 083	8.3	95	142	10.0
CDCC 049	4.9	57	95	6.0	CDCC 084	8.4	95	142	10.0
CDCC 050	5.0	57	95	6.0	CDCC 085	8.5	95	142	10.0
CDCC 051	5.1	57	95	6.0	CDCC 086	8.6	95	142	10.0
CDCC 052	5.2	57	95	6.0	CDCC 087	8.7	95	142	10.0
CDCC 053	5.3	57	95	6.0	CDCC 088	8.8	95	142	10.0
CDCC 054	5.4	57	95	6.0	CDCC 089	8.9	95	142	10.0
CDCC 055	5.5	57	95	6.0	CDCC 090	9.0	95	142	10.0
CDCC 056	5.6	57	95	6.0	CDCC 091	9.1	95	142	10.0
CDCC 057	5.7	57	95	6.0	CDCC 092	9.2	95	142	10.0
CDCC 058	5.8	57	95	6.0	CDCC 093	9.3	95	142	10.0
CDCC 059	5.9	57	95	6.0	CDCC 094	9.4	95	142	10.0
CDCC 060	6.0	57	95	6.0	CDCC 095	9.5	95	142	10.0
CDCC 061	6.1	76	114	8.0	CDCC 096	9.6	95	142	10.0
CDCC 062	6.2	76	114	8.0	CDCC 097	9.7	95	142	10.0
CDCC 063	6.3	76	114	8.0	CDCC 098	9.8	95	142	10.0
CDCC 064	6.4	76	114	8.0	CDCC 099	9.9	95	142	10.0
					CDCC 100	10.0	95	142	10.0

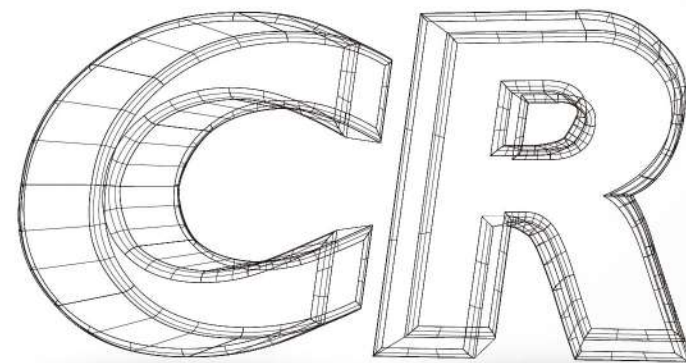

CARBIDE REAMERS SERIES

CR

CR CD

CRA

MG

7°

m5

HRC 45

Finishing


Cutting Data P.253

Carbide reamers series / Carbide Reamers

H

P

K

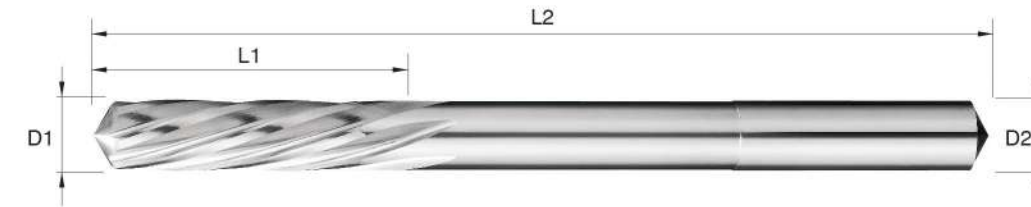

FEATURES

- The cutting edge with designed angles to reduce cutting force for better anti-vibration.
- Precision ground cutting edge for higher accuracy. Fine surface after finishing.

Order No.	Dia D1	Flute Length L1	Overall Length L2	Flutes
CRA 020	2.0	11	49	4
CRA 021	2.1	11	49	4
CRA 022	2.2	12	53	4
CRA 023	2.3	12	53	4
CRA 024	2.4	14	57	4
CRA 025	2.5	14	57	4
CRA 026	2.6	14	57	4
CRA 027	2.7	15	61	4
CRA 028	2.8	15	61	4
CRA 029	2.9	15	61	4
CRA 030	3.0	15	61	4
CRA 031	3.1	16	65	4
CRA 032	3.2	16	65	4
CRA 033	3.3	16	65	4
CRA 034	3.4	18	70	4
CRA 035	3.5	18	70	4
CRA 036	3.6	18	70	4
CRA 037	3.7	18	70	4
CRA 038	3.8	19	75	4
CRA 039	3.9	19	75	4
CRA 040	4.0	19	75	4
CRA 041	4.1	19	75	4
CRA 042	4.2	19	75	4
CRA 043	4.3	21	80	4
CRA 044	4.4	21	80	4
CRA 045	4.5	21	80	4
CRA 046	4.6	21	80	6
CRA 047	4.7	21	80	6
CRA 048	4.8	23	86	6
CRA 049	4.9	23	86	6
CRA 050	5.0	23	86	6
CRA 051	5.1	23	86	6
CRA 052	5.2	23	86	6
CRA 053	5.3	23	86	6
CRA 054	5.4	26	93	6

Order No.	Dia D1	Flute Length L1	Overall Length L2	Flutes
CRA 055	5.5	26	93	6
CRA 056	5.6	26	93	6
CRA 057	5.7	26	93	6
CRA 058	5.8	26	93	6
CRA 059	5.9	26	93	6
CRA 060	6.0	26	93	6
CRA 061	6.1	28	101	6
CRA 062	6.2	28	101	6
CRA 063	6.3	28	101	6
CRA 064	6.4	28	101	6
CRA 065	6.5	28	101	6
CRA 066	6.6	28	101	6
CRA 067	6.7	31	101	6
CRA 068	6.8	31	109	6
CRA 069	6.9	31	109	6
CRA 070	7.0	31	109	6
CRA 071	7.1	31	109	6
CRA 072	7.2	31	109	6
CRA 073	7.3	31	109	6
CRA 074	7.4	31	109	6
CRA 075	7.5	31	109	6
CRA 076	7.6	33	117	6
CRA 077	7.7	33	117	6
CRA 078	7.8	33	117	6
CRA 079	7.9	33	117	6
CRA 080	8.0	33	117	6
CRA 081	8.1	33	117	6
CRA 082	8.2	33	117	6
CRA 083	8.3	33	117	6
CRA 084	8.4	33	117	6
CRA 085	8.5	33	117	6
CRA 086	8.6	36	125	6
CRA 087	8.7	36	125	6
CRA 088	8.8	36	125	6
CRA 089	8.9	36	125	6

Order No.	Dia D1	Flute Length L1	Overall Length L2	Flutes
CRA 090	9.0	36	125	6
CRA 091	9.1	36	125	6
CRA 092	9.2	36	125	6
CRA 093	9.3	36	125	6
CRA 094	9.4	36	125	6
CRA 095	9.5	36	125	6
CRA 096	9.6	38	133	6
CRA 097	9.7	38	133	6
CRA 098	9.8	38	133	6
CRA 099	9.9	38	133	6
CRA 100	10.0	38	133	6
CRA 101	10.1	38	133	6
CRA 102	10.2	38	133	6
CRA 103	10.3	38	133	6
CRA 104	10.4	38	133	6
CRA 105	10.5	38	133	6
CRA 106	10.6	38	133	6
CRA 107	10.7	41	142	6
CRA 108	10.8	41	142	6
CRA 109	10.9	41	142	6
CRA 110	11.0	41	142	6
CRA 111	11.1	41	142	6
CRA 112	11.2	41	142	6
CRA 113	11.3	41	142	6
CRA 114	11.4	41	142	6
CRA 115	11.5	41	142	6
CRA 116	11.6	41	142	6
CRA 117	11.7	41	142	6
CRA 118	11.8	41	142	6
CRA 119	11.9	44	151	6
CRA 120	12.0	44	151	6

unit: mm

CRA REAMERS

DT

DENTAL END MILLS


DEN.pro



DT DEN.pro
TOBF



Dental end mills / 2 Flute / Long Neck / Ball Nose / for ZrO2

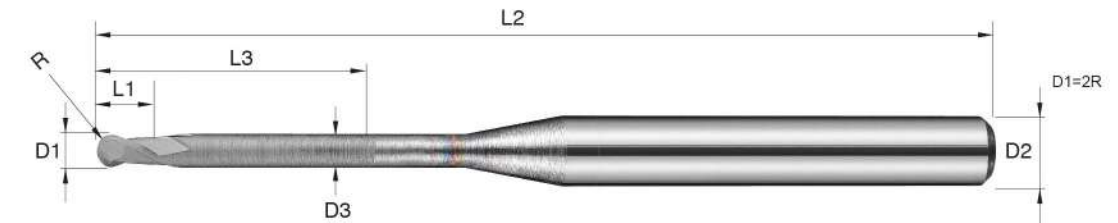

• ITEMS

unit: mm

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
TOBF 00610.3	R0.3	0.56	2.5	10	50	3
TOBF 00812.3	R0.4	0.76	3.0	12	50	3
TOBF 01016.3	R0.5	0.95	4.0	16	50	3
TOBF 01018.3	R0.5	0.95	4.0	18	50	3
TOBF 01518.3	R0.75	1.45	4.0	18	50	3
TOBF 02020.3	R1	1.92	4.5	20	50	3
TOBF 02025.3	R1	1.92	4.5	25	50	3
TOBF 02522.3	R1.25	2.40	4.5	22	50	3
TOBF 02525.3	R1.25	2.40	4.5	25	50	3
TOBF 03025.3	R1.5	2.90	6.0	25	50	3
TOBF 00610.4	R0.3	0.56	2.5	10	50	4
TOBF 01018.4	R0.5	0.95	4.0	18	50	4
TOBF 02020.4	R1	1.92	4.5	20	50	4
TOBF 02522.4	R1.25	2.40	4.5	22	50	4
TOBF 00610.6	R0.3	0.56	2.5	10	50	6
TOBF 00812.6	R0.4	0.76	3.0	12	50	6
TOBF 01016.6	R0.5	0.95	4.0	16	50	6
TOBF 01018.6	R0.5	0.95	4.0	18	50	6
TOBF 01518.6	R0.75	1.45	4.0	18	50	6
TOBF 02020.6	R1	1.92	4.5	20	50	6
TOBF 02025.6	R1	1.92	4.5	25	50	6
TOBF 02522.6	R1.25	2.40	4.5	22	50	6
TOBF 02525.6	R1.25	2.40	4.5	25	50	6
TOBF 03025.6	R1.5	2.90	6.0	25	50	6

TTBF

Dental end mills / 2 Flute / Long Neck / Ball Nose / for CoCr . Titanium



unit: mm

• ITEMS

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
TTBF 00810.4	R0.4	0.76	3.5	10	50	4
TTBF 01012.4	R0.5	0.95	3.5	12	50	4
TTBF 01514.4	R0.75	1.45	4.0	14	50	4
TTBF 02016.4	R1	1.92	4.0	16	50	4
TTBF 02518.4	R1.25	2.40	4.5	18	50	4
TTBF 03022.4	R1.5	2.90	5.5	22	50	4
TTBF 00808.6	R0.4	0.76	3.5	8	50	6
TTBF 01008.6	R0.5	0.95	3.5	8	50	6
TTBF 01010.6	R0.5	0.95	3.5	10	50	6
TTBF 01012.6	R0.5	0.95	3.5	12	50	6
TTBF 01512.6	R0.75	1.45	4.0	12	50	6
TTBF 01516.6	R0.75	1.45	4.0	16	50	6
TTBF 02012.6	R1	1.92	4.0	12	50	6
TTBF 02016.6	R1	1.92	4.0	16	50	6
TTBF 02514.6	R1.25	2.40	4.5	14	50	6
TTBF 02518.6	R1.25	2.40	4.5	18	50	6
TTBF 03015.6	R1.5	2.90	5.5	15	50	6
TTBF 03017.6	R1.5	2.90	5.5	17	50	6
TTBF 03022.6	R1.5	2.90	5.5	22	50	6

TTFA

Dental end mills / 2 Flute / Long Neck / Square / for CoCr . Titanium



unit: mm

• ITEMS

Order No.	Diameter D1	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
TTFA 00505.4	0.5	0.46	1.0	5	50	4
TTFA 00808.4	0.8	0.76	1.2	8	50	4
TTFA 00910.4	0.9	0.85	1.2	10	50	4
TTFA 01015.4	1.0	0.95	1.5	15	50	4
TTFA 01215.4	1.2	1.15	1.5	15	50	4
TTFA 01516.4	1.5	1.45	2.0	16	50	4
TTFA 01616.4	1.6	1.54	2.5	16	50	4
TTFA 01816.4	1.8	1.92	2.5	16	50	4
TTFA 02016.4	2.0	1.92	3.0	16	50	4
TTFA 02518.4	2.5	2.40	3.0	18	50	4

DT

DEN.pro

TTRA



Dental end mills / 2 Flute / Long Neck / Corner Radius / for CoCr . Titanium



unit: mm

• ITEMS

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
TTRA 01015.4	1.0	0.1	0.95	1.5	15	50	4
TTRA 01215.4	1.2	0.1	1.15	1.5	15	50	4
TTRA 01516.4	1.5	0.2	1.45	2.0	16	50	4
TTRA 01816.4	1.8	0.2	1.73	2.5	16	50	4
TTRA 02016.4	2.0	0.2	1.92	3.0	16	50	4
TTRA 02518.4	2.5	0.2	2.40	3.0	18	50	4


DT

DEN.pro

TWBF



Dental end mills / 2 Flute / Long Neck / Ball Nose / for PMMA. Wax

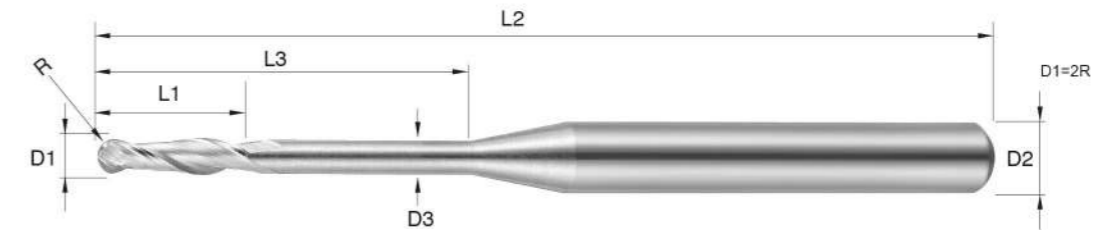

unit: mm

• ITEMS

Order No.	Radius R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
TWBF 00812.4	R0.4	0.76	3.5	12	50	4
TWBF 01016.4	R0.5	0.95	3.5	16	50	4
TWBF 01518.4	R0.75	1.45	4.0	18	50	4
TWBF 02020.4	R1	1.92	4.0	20	50	4
TWBF 02525.4	R1.25	2.40	4.5	25	50	4
TWBF 03025.4	R1.5	2.90	5.5	25	50	4

DT

TTRB



Dental end mills / 4 Flute / Long Neck / Corner Radius / for CoCr . Titanium



unit: mm

• ITEMS

Order No.	Diameter D1	Corner R R	Neck Dia D3	Flute Length L1	Effective Length L3	O.A.L. L2	Shank Dia D2
TTRB 02012.6	2.0	0.2	1.92	4.0	12	50	6
TTRB 03014.6	3.0	0.3	2.90	5.0	14	50	6
TTRB 03018.6	3.0	0.3	2.90	5.0	18	50	6
TTRB 04016.6	4.0	0.4	3.88	6.0	16	50	6

Amann Girrbach

Compatible with:

TAZ



Order No.	Cut Diameter D1	Neck Length L3	O.A.L. L2	Shank Dia D2	End Type	Number of flutes	Coating	Application
TAZ-00610	0.6	10	47	3	Ball Nose	2	Diamond	Zirconia
TAZ-01016	1.0	16	47	3	Ball Nose	2	Diamond	Zirconia
TAZ-02518	2.5	18	47	3	Ball Nose	2	Diamond	Zirconia

unit: mm

TAT



Order No.	Cut Diameter D1	Neck Length L3	O.A.L. L2	Shank Dia D2	End Type	Number of flutes	Coating	Application
TAT-01008	1.0	8	43	3	Ball Nose	4	G-plus	CoCr./Titanium
TAT-02008	2.0	8	43	3	Ball Nose	4	G-plus	CoCr./Titanium

unit: mm

imes-icore

Compatible with:


TIZ3



Order No.	Cut Diameter D1	Neck Length L3	O.A.L. L2	Shank Dia D2	End Type	Number of flutes	Coating	Application
TIZ3-00610	0.6	10	48	3	Ball Nose	2	Diamond	Zirconia
TIZ3-01016	1.0	16	48	3	Ball Nose	2	Diamond	Zirconia
TIZ3-02518	2.5	18	48	3	Ball Nose	2	Diamond	Zirconia

unit: mm

TIZ6

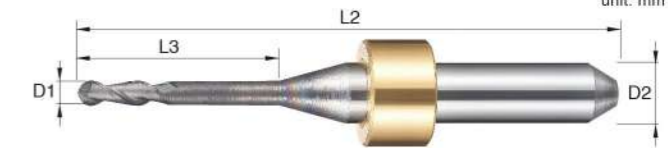

Order No.	Cut Diameter D1	Neck Length L3	O.A.L. L2	Shank Dia D2	End Type	Number of flutes	Coating	Application
TIZ6-01016	1.0	16	53	6	Ball Nose	2	Diamond	Zirconia
TIZ6-02520	2.5	20	53	6	Ball Nose	2	Diamond	Zirconia

unit: mm

TIT6

Compatible with machine models / CORITEC 350i,450i(do).650i



Order No.	Cut Diameter D1	Neck Length L3	O.A.L. L2	Shank Dia D2	End Type	Number of flutes	Coating	Application
TIT6-00604	0.6	4	50	6	Ball Nose	2	G-plus	CoCr./Titanium
TIT6-01010	1.0	10	50	6	Ball Nose	2	G-plus	CoCr./Titanium
TIT6-01512	1.5	12	50	6	Ball Nose	2	G-plus	CoCr./Titanium
TIT6-02012	2.0	12	50	6	Ball Nose	2	G-plus	CoCr./Titanium
TIT6-03016	3.0	16	50	6	Ball Nose	2	G-plus	CoCr./Titanium

unit: mm

TIT3

Compatible with machine models / CORITEC one,150i,250i,350i,450i



Order No.	Cut Diameter D1	Neck Length L3	O.A.L. L2	Shank Dia D2	End Type	Number of flutes	Coating	Application
TIT3-00616	0.6	16	50	3	Ball Nose	2	G-plus	CoCr./Titanium
TIT3-01010	1.0	10	50	3	Ball Nose	2	G-plus	CoCr./Titanium
TIT3-01512	1.5	12	50	3	Ball Nose	2	G-plus	CoCr./Titanium
TIT3-02012	2.0	12	50	3	Ball Nose	2	G-plus	CoCr./Titanium
TIT3-03016	3.0	16	50	3	Ball Nose	2	G-plus	CoCr./Titanium


unit: mm

Roland

Compatible with:

TRZ

Compatible with machine models / DWX-4/50/51/52

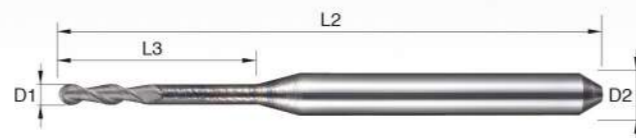

Order No.	Cut Diameter D1	Neck Length L3	O.A.L. L2	Shank Dia D2	End Type	Number of flutes	Coating	Application
TRZ-00610	0.6	10	50	4	Ball Nose	2	Diamond	Zirconia
TRZ-01014	1.0	14	50	4	Ball Nose	2	Diamond	Zirconia
TRZ-02018	2.0	18	50	4	Ball Nose	2	Diamond	Zirconia

unit: mm

TRT

Compatible with machine models / DWX-4/50/51/52



Order No.	Cut Diameter D1	Neck Length L3	O.A.L. L2	Shank Dia D2	End Type	Number of flutes	Coating	Application
TRT-00606	0.6	6	50	4	Ball Nose	2	G-plus	CoCr./Titanium
TRT-01012	1.0	12	50	4	Ball Nose	2	G-plus	CoCr./Titanium
TRT-02014	2.0	14	50	4	Ball Nose	2	G-plus	CoCr./Titanium


unit: mm

vhf

Compatible with:

TVZS

Compatible with machine models / K1,K3,K4,N4+,Z4

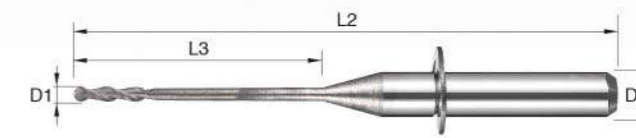


Order No.	Cut Diameter D1	Neck Length L3	O.A.L. L2	Shank Dia D2	End Type	Number of flutes	Coating	Application
TVZS-01016	1.0	16	35	3	Ball Nose	2	Diamond	Zirconia
TVZS-02018	2.0	18	35	3	Ball Nose	2	Diamond	Zirconia

unit: mm

TVZM

Compatible with machine models / S1,S2,S5,K5+,R5,E5

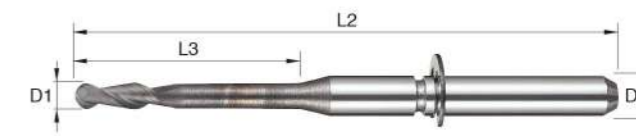

Order No.	Cut Diameter D1	Neck Length L3	O.A.L. L2	Shank Dia D2	End Type	Number of flutes	Coating	Application
TVZM-01016	1.0	16	40	3	Ball Nose	2	Diamond	Zirconia
TVZM-02020	2.0	20	40	3	Ball Nose	2	Diamond	Zirconia

unit: mm

SOLID CARBIDE TOOLS

INCH SPECIFICATION




E EFFICIENCY MILLS

INCH IEA

MG 2 35° HRC 55 TiAlN Finishing Semi-Finishing

Efficiency end mills series / 2 Flute / Square

P K

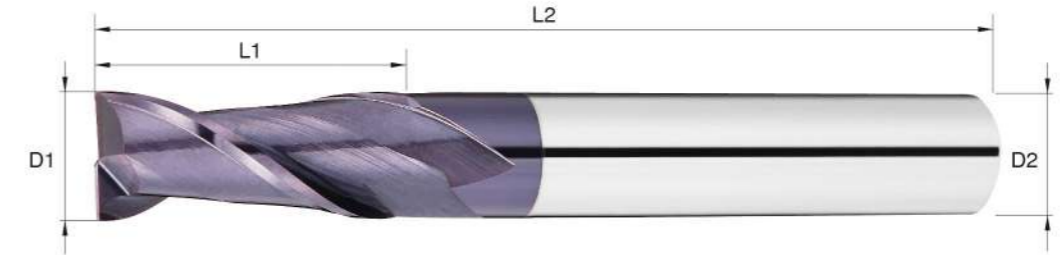

• FEATURES

- 2 Flute Square for up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

unit: inch

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
IEA 031A	1/32	3/32	1-1/2	1/8
IEA 046A	3/64	7/64	1-1/2	1/8
IEA 062A	1/16	1/4	1-1/2	1/8
IEA 078A	5/64	3/16	1-1/2	1/8
IEA 093A	3/32	3/8	1-1/2	1/8
IEA 109A	7/64	3/8	1-1/2	1/8
IEA 125A	1/8	1/2	1-1/2	1/8
IEA 140A	9/64	1/2	2	3/16
IEA 156A	5/32	9/16	2	3/16
IEA 171A	11/64	5/8	2	3/16
IEA 187A	3/16	5/8	2	3/16
IEA 203A	13/64	5/8	2-1/2	1/4
IEA 218A	7/32	5/8	2-1/2	1/4
IEA 234A	15/64	3/4	2-1/2	1/4
IEA 250A	1/4	3/4	2-1/2	1/4
IEA 312A	5/16	13/16	2-1/2	5/16
IEA 375A	3/8	1	2-1/2	3/8
IEA 437A	7/16	1	2-3/4	7/16
IEA 500A	1/2	1	3	1/2
IEA 625A	5/8	1-1/4	3-1/2	5/8
IEA 750A	3/4	1-1/2	4	3/4

• TOLERANCE

unit: inch

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6


E EFFICIENCY MILLS

INCH IEB

Efficiency end mills series / 4 Flute / Square

MG 4 35° HRC 55 TiAlN Finishing Semi-Finishing

P K

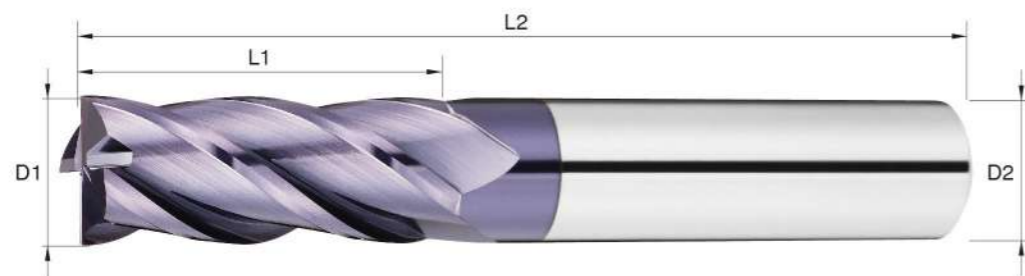

• FEATURES

- 4 Flute Square for up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
IEB 031A	1/32	3/32	1-1/2	1/8
IEB 062A	1/16	1/4	1-1/2	1/8
IEB 078A	5/64	3/16	1-1/2	1/8
IEB 093A	3/32	3/8	1-1/2	1/8
IEB 109A	7/64	3/8	1-1/2	1/8
IEB 125A	1/8	1/2	1-1/2	1/8
IEB 140A	9/64	1/2	2	3/16
IEB 156A	5/32	9/16	2	3/16
IEB 171A	11/64	5/8	2	3/16
IEB 187A	3/16	5/8	2	3/16
IEB 203A	13/64	5/8	2-1/2	1/4
IEB 218A	7/32	5/8	2-1/2	1/4
IEB 234A	15/64	3/4	2-1/2	1/4
IEB 250A	1/4	3/4	2-1/2	1/4
IEB 312A	5/16	13/16	2-1/2	5/16
IEB 375A	3/8	1	2-1/2	3/8
IEB 437A	7/16	1	2-3/4	7/16
IEB 500A	1/2	1	3	1/2
IEB 562A	9/16	1-1/8	3-1/2	9/16
IEB 625A	5/8	1-1/4	3-1/2	5/8
IEB 750A	3/4	1-1/2	4	3/4

• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6


E EFFICIENCY MILLS

INCH IELC

Efficiency end mills series / 2 Flute / Long Flute / Square

MG 2 35° HRC 55 TiAlN Finishing Semi-Finishing

P K

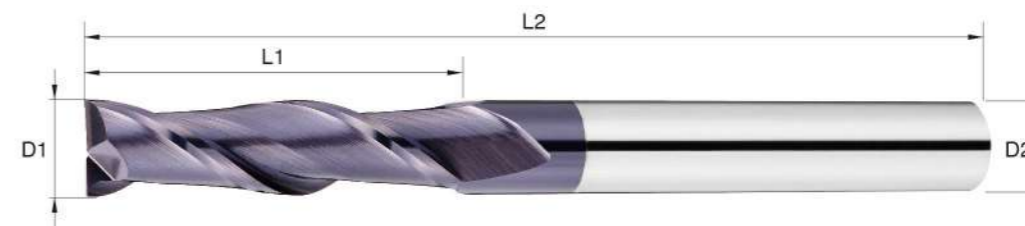

• FEATURES

- Long Flute 2 Flute Square for up to HRC55.
- Extended flute length (L1) suitable for deep side milling.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
IELC 125A-S	1/8	3/4	2	1/8
IELC 187A-L	3/16	1-1/8	3	3/16
IELC 250A-S	1/4	1-1/8	3	1/4
IELC 312A	5/16	1-5/8	4	5/16
IELC 375A	3/8	2	4	3/8
IELC 500A	1/2	2	4	1/2
IELC 625A	5/8	3	6	5/8
IELC 750A	3/4	3	6	3/4

• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6


E EFFICIENCY MILLS

INCH **IELD**

Efficiency end mills series / 4 Flute / Long Flute / Square

MG 4 35° HRC 55 TiAlN Finishing Semi-Finishing

P K

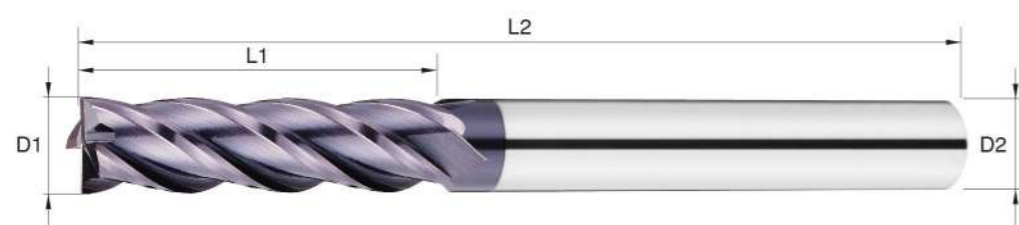

• FEATURES

- Long Flute 4 Flute Square for up to HRC55.
- Extended flute length (L1) suitable for deep side milling.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
IELD 062A	1/16	0.312"	3	1/8
IELD 093A	3/32	0.55"	3	1/8
IELD 125A-S	1/8	3/4	2	1/8
IELD 156A	5/32	1-1/8	3	3/16
IELD 187A-L	3/16	1-1/8	3	3/16
IELD 250A-S	1/4	1-1/8	3	1/4
IELD 312A	5/16	1-5/8	4	5/16
IELD 375A	3/8	2	4	3/8
IELD 500A	1/2	2	4	1/2
IELD 625A	5/8	3	6	5/8
IELD 750A	3/4	3	6	3/4

unit: inch

• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6

unit: inch

E EFFICIENCY MILLS

INCH **IBA**

Efficiency end mills series / 2 Flute / Ball Nose

MG 2 30° HRC 55 TiAlN Finishing Semi-Finishing

P K



• FEATURES

- 2 Flute Ball Nose for workpiece up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
IBA 125A	1/8	1/2	1-1/2	1/8
IBA 156A	5/32	9/16	2	3/16
IBA 187A	3/16	5/8	2	3/16
IBA 218A	7/32	5/8	2-1/2	1/4
IBA 250A	1/4	3/4	2-1/2	1/4
IBA 312A	5/16	13/16	2-1/2	5/16
IBA 375A	3/8	1	2-1/2	3/8
IBA 437A	7/16	1	2-3/4	7/16
IBA 500A	1/2	1	3	1/2
IBA 625A	5/8	1-1/4	3-1/2	5/8
IBA 750A	3/4	1-1/4	4	3/4

unit: inch

• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6

unit: inch


E EFFICIENCY MILLS

INCH IBB

Efficiency end mills series / 4 Flute / Ball Nose

MG 4 30° HRC 55 TiAlN Finishing Semi-Finishing

P K

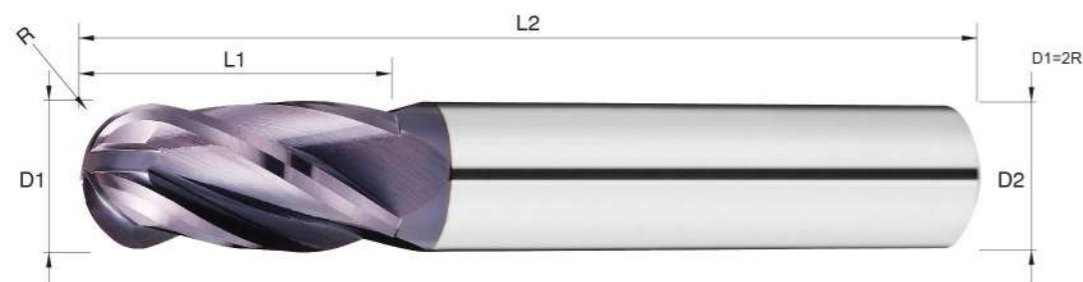

• FEATURES

- 4 Flute Ball Nose for workpiece up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
IBB 046A	3/64	7/64	1-1/2	1/8
IBB 062A	1/16	1/4	1-1/2	1/8
IBB 125A	1/8	1/2	1-1/2	1/8
IBB 156A	5/32	9/16	2	3/16
IBB 187A	3/16	5/8	2	3/16
IBB 218A	7/32	5/8	2-1/2	1/4
IBB 250A	1/4	3/4	2-1/2	1/4
IBB 312A	5/16	13/16	2-1/2	5/16
IBB 375A	3/8	1	2-1/2	3/8
IBB 437A	7/16	1	2-3/4	7/16
IBB 500A	1/2	1	3	1/2
IBB 625A	5/8	1-1/4	3-1/2	5/8
IBB 750A	3/4	1-1/2	4	3/4

unit: inch

• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6

E EFFICIENCY MILLS

INCH IBALF

Efficiency end mills series / 2 Flute / Ball Nose

MG 2 30° HRC 55 TiAlN Finishing Semi-Finishing

P K



• FEATURES

- Long Flute 2 Flute Ball Nose for workpiece up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
IBALF 125A-S	1/8	3/4	2	1/8
IBALF 187A-L	3/16	1-1/8	3	3/16
IBALF 250A-S	1/4	1-1/8	3	1/4
IBALF 312A	5/16	1-5/8	4	5/16
IBALF 375A	3/8	2	4	3/8
IBALF 500A	1/2	2	4	1/2
IBALF 625A	5/8	3	6	5/8
IBALF 750A	3/4	3	6	3/4

unit: inch

• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6


E EFFICIENCY MILLS

INCH **IBBLF**

Efficiency end mills series / 4 Flute / Ball Nose

MG 4 30° HRC 55 TiAlN Finishing Semi-Finishing

P K

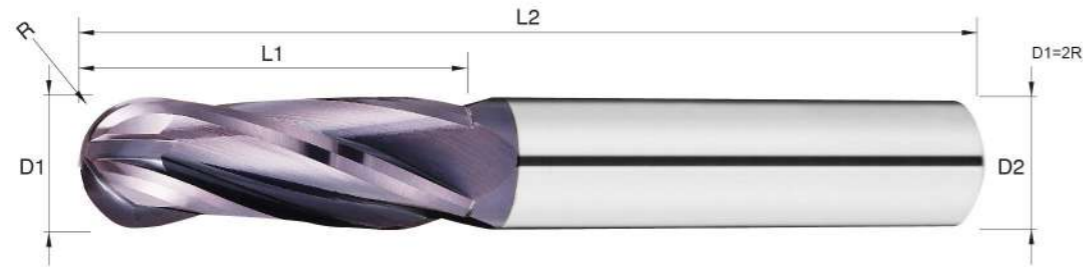

• FEATURES

- Long Flute 4 Flute Ball Nose for workpiece up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
IBBLF 125A-S	1/8	3/4	2	1/8
IBBLF 187A-L	3/16	1-1/8	3	3/16
IBBLF 250A-S	1/4	1-1/8	3	1/4
IBBLF 312A	5/16	1-5/8	4	5/16
IBBLF 375A	3/8	2	4	3/8
IBBLF 500A	1/2	2	4	1/2
IBBLF 625A	5/8	3	6	5/8
IBBLF 750A	3/4	3	6	3/4

• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6


E EFFICIENCY MILLS

INCH **IRB**

Efficiency end mills series / 4 Flute / Corner Radius

MG 4 35° HRC 55 TiAlN Finishing Semi-Finishing

P K

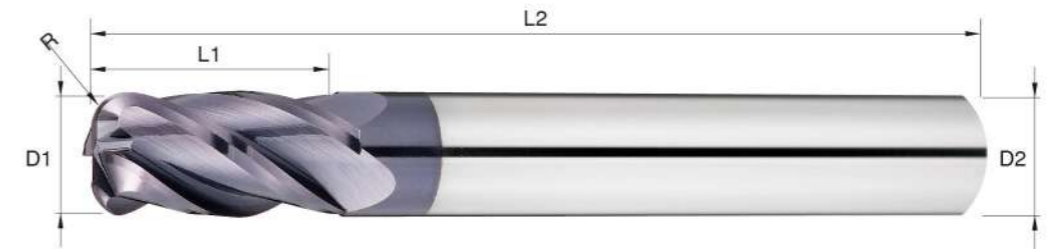

• FEATURES

- 4 Flute Corner Radius for up to HRC55.
- Low/High alloy steel, cast steel, tool steel, and Cast iron.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
IRB 125R015	1/8	0.015	1/2	1-1/2	1/8
IRB 125R030	1/8	0.03	1/2	1-1/2	1/8
IRB 187R015	3/16	0.015	5/8	2	3/16
IRB 187R030	3/16	0.03	5/8	2	3/16
IRB 250R015	1/4	0.015	3/4	2-1/2	1/4
IRB 250R030	1/4	0.03	3/4	2-1/2	1/4
IRB 250R045	1/4	0.045	3/4	2-1/2	1/4
IRB 312R015	5/16	0.015	13/16	2-1/2	5/16
IRB 312R030	5/16	0.03	13/16	2-1/2	5/16
IRB 312R045	5/16	0.045	13/16	2-1/2	5/16
IRB 375R015	3/8	0.015	1	2-1/2	3/8
IRB 375R030	3/8	0.03	1	2-1/2	3/8
IRB 375R045	3/8	0.045	1	2-1/2	3/8
IRB 375R060	3/8	0.06	1	2-1/2	3/8
IRB 437R015	7/16	0.015	1	2-3/4	7/16
IRB 437R030	7/16	0.03	1	2-3/4	7/16
IRB 437R045	7/16	0.045	1	2-3/4	7/16
IRB 437R060	7/16	0.06	1	2-3/4	7/16
IRB 437R090	7/16	0.09	1	2-3/4	7/16
IRB 500R015	1/2	0.015	1	3	1/2
IRB 500R030	1/2	0.03	1	3	1/2
IRB 500R045	1/2	0.045	1	3	1/2
IRB 500R060	1/2	0.06	1	3	1/2
IRB 500R090	1/2	0.09	1	3	1/2
IRB 500R125	1/2	0.125	1	3	1/2

• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6


E EFFICIENCY MILLS

INCH **IRC**

Efficiency end mills series / 4 Flute / Long Shank Corner Radius

MG 4 35° R HRC 55 TiAlN Finishing Semi-Finishing

P K

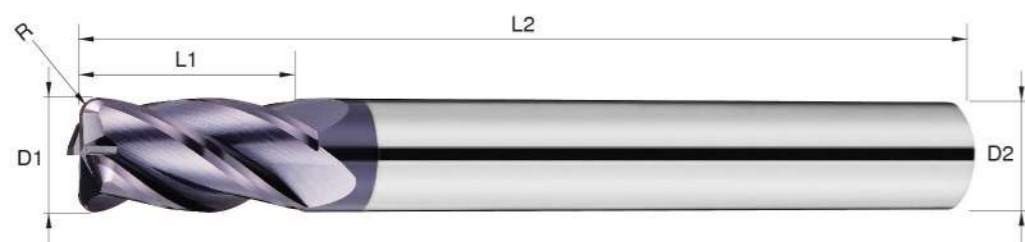

• FEATURES

- Long shank 4 Flute Corner Radius for up to HRC55.
- Extended overall length for greater depth of cut.
- TiAlN Coating for General steel.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
IRC 250R020	1/4	0.02	3/4	4	1/4
IRC 250R030	1/4	0.03	3/4	4	1/4
IRC 250R045	1/4	0.045	3/4	4	1/4
IRC 312R020	5/16	0.02	13/16	4	5/16
IRC 312R030	5/16	0.03	13/16	4	5/16
IRC 312R045	5/16	0.045	13/16	4	5/16
IRC 375R020	3/8	0.02	1	4	3/8
IRC 375R030	3/8	0.03	1	4	3/8
IRC 375R045	3/8	0.045	1	4	3/8
IRC 375R060	3/8	0.06	1	4	3/8
IRC 375R090	3/8	0.09	1	4	3/8
IRC 375R125	3/8	0.125	1	4	3/8
IRC 500R020	1/2	0.02	1	4	1/2
IRC 500R030	1/2	0.03	1	4	1/2
IRC 500R045	1/2	0.045	1	4	1/2
IRC 500R060	1/2	0.06	1	4	1/2
IRC 500R090	1/2	0.09	1	4	1/2
IRC 500R125	1/2	0.125	1	4	1/2

• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6


S SUPER MILL

INCH **ISW**

HSC & HHC series / 4 Flute / Square

S MG 4 35°/38° α°/β° HRC 60 i8 Finishing Semi-Finishing

H P K

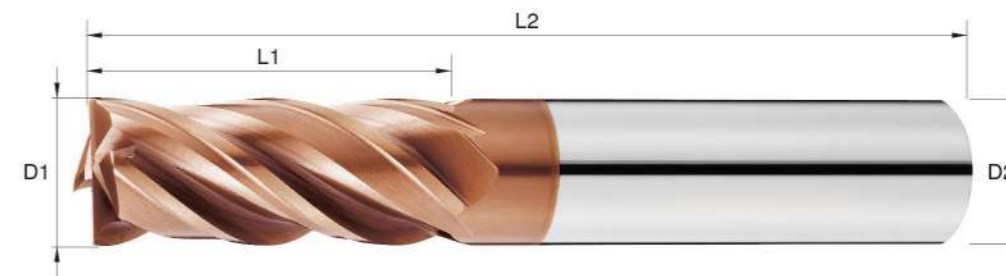

• FEATURES

- 4 Flute Square for up to HRC60.
- Variable helix angle and unequal flute spacing designed for stability and anti-vibration.
- i8 Coating: High temperature and low wear resistance.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
ISW-062	1/16	11/64	2	1/8
ISW-125	1/8	3/8	2	1/8
ISW-187	3/16	7/16	2	3/16
ISW-250	1/4	5/8	2-1/2	1/4
ISW-312	5/16	13/16	2-1/2	5/16
ISW-375	3/8	7/8	2-1/2	3/8
ISW-500	1/2	1-1/4	3	1/2
ISW-625	5/8	1-5/8	3-1/2	5/8
ISW-750	3/4	1-3/4	4	3/4


• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6

S SUPER MILL

INCH ISWR

HSC & HHC series / 4 Flute / Corner Radius

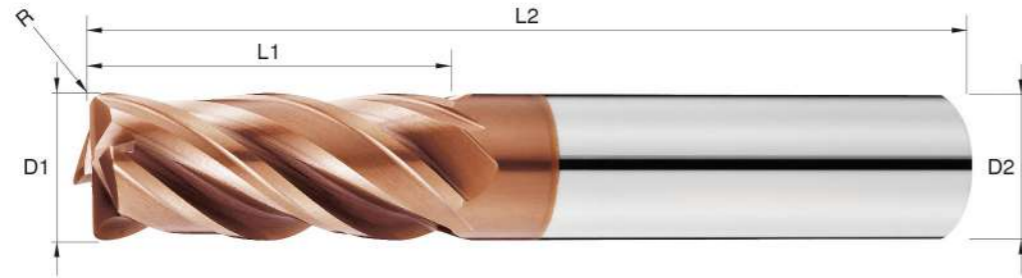

• FEATURES

- 4 Flute Corner Radius for up to HRC60.
- Variable helix angle and unequal flute spacing designed for stability and anti-vibration.
- i8 Coating: High temperature resistance and low wear.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
ISWR-062R020	1/16	0.02	11/64	2	1/8
ISWR-125R020	1/8	0.02	3/8	2	1/8
ISWR-187R020	3/16	0.02	7/16	2	3/16
ISWR-250R020	1/4	0.02	5/8	2-1/2	1/4
ISWR-312R020	5/16	0.02	13/16	2-1/2	5/16
ISWR-375R020	3/8	0.02	7/8	2-1/2	3/8
ISWR-500R020	1/2	0.02	1-1/4	3	1/2
ISWR-625R020	5/8	0.02	1-5/8	3-1/2	5/8
ISWR-750R020	3/4	0.02	1-3/4	4	3/4


• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6

I I.pro

INCH IIA

Titanium & Stainless cutting series / 4 Flute / Square

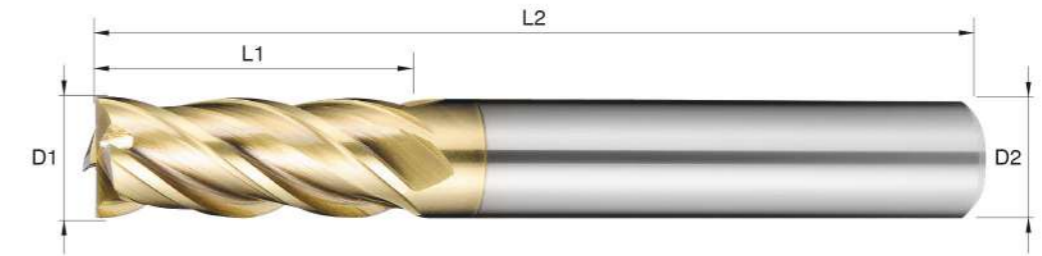

• FEATURES

- 4 Flute Square for Stainless Steel, Titanium & Ti alloys, and High temp. alloy.
- Variable helix angle and unequal flute spacing offer great stability and anti-vibration.
- G-plus Coating: Excellent wear resistance and heat resistance.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
IIA-125	1/8	3/8	1/8	2
IIA-187	3/16	7/16	3/16	2
IIA-250	1/4	5/8	1/4	2-1/2
IIA-312	5/16	13/16	5/16	2-1/2
IIA-375	3/8	7/8	3/8	2-1/2
IIA-500	1/2	1-1/4	1/2	3
IIA-625	5/8	1-5/8	5/8	3-1/2


• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6

I I.pro

INCH **IIAR**

Titanium & Stainless cutting series / 4 Flute / Corner Radius

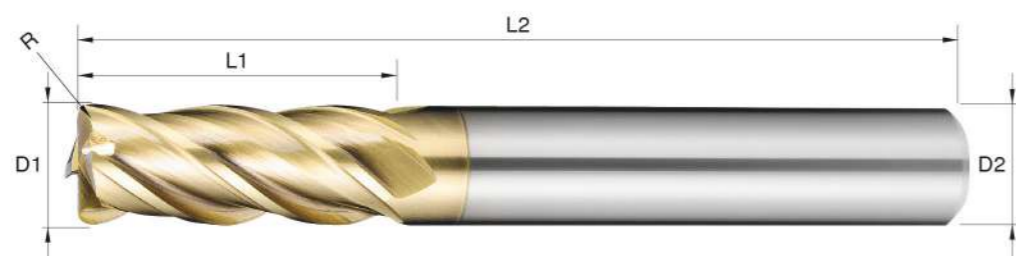

• FEATURES

- 4 Flute Corner Radius for Stainless Steel, Titanium & Ti alloys, and High temp. alloy.
- Variable helix angle and unequal flute spacing offer great stability and anti-vibration.
- G-plus Coating: Excellent wear resistance and heat resistant.

• ITEMS

Order No.	Diameter D1	Corner R R	Flute Length L1	O.A.L. L2	Shank Dia D2
IIAR-125R020	1/8	0.02	3/8	2	1/8
IIAR-187R020	3/16	0.02	7/16	2	3/16
IIAR-250R020	1/4	0.02	5/8	2-1/2	1/4
IIAR-312R020	5/16	0.02	13/16	2-1/2	5/16
IIAR-375R020	3/8	0.02	7/8	2-1/2	3/8
IIAR-500R020	1/2	0.02	1-1/4	3	1/2
IIAR-625R020	5/8	0.02	1-5/8	3-1/2	5/8

unit: inch

• TOLERANCE


D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6

unit: inch

D D MILL

INCH **IAES**

Aluminum & Copper cutting series / 3 Flute / Square

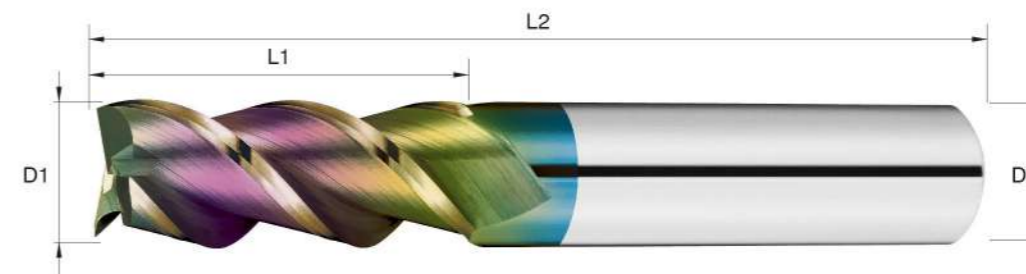

• FEATURES

- 3 Flute Square End for Aluminum.
- Helix Angle: 45°
- Planing, Slotting, and Side Milling.
- DLC-X Coating: Reduce friction coefficient and improve chip removal efficiency.

• ITEMS

Order No.	Diameter D1	Flute Length L1	O.A.L. L2	Shank Dia D2
IAES 125	1/8	3/8	2	1/8
IAES 187	3/16	7/16	2	3/16
IAES 250	1/4	5/8	2-1/2	1/4
IAES 312	5/16	13/16	2-1/2	5/16
IAES 375	3/8	7/8	2-1/2	3/8
IAES 500	1/2	1-1/4	3	1/2
IAES 625	5/8	1-5/8	3-1/2	5/8

unit: inch

• TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6

unit: inch


D MILL

INCH IAE

Aluminum & Copper cutting series / 3 Flute / Square

S 3 45° Finishing
MG

N

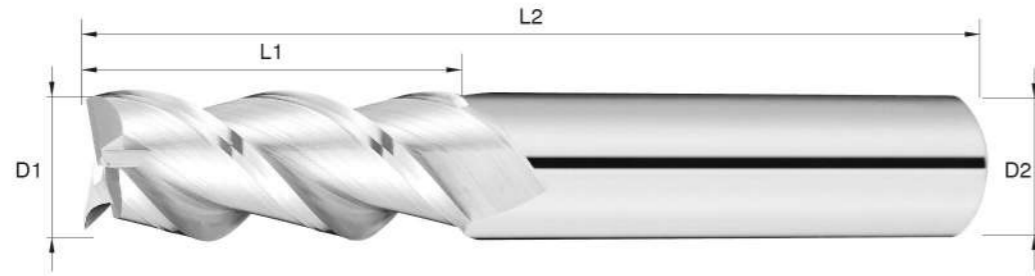

FEATURES

- 3 Flute Square for Aluminum.
- Helix Angle: 45°
- Planing, Slotting, and Side Milling.

ITEMS

Order No.	Diameter D1	Flute Length L1	Shank Dia D2	O.A.L. L2
IAE 125	1/8	3/8	1/8	2
IAE 187	3/16	7/16	3/16	2
IAE 250	1/4	5/8	1/4	2-1/2
IAE 312	5/16	13/16	5/16	2-1/2
IAE 375	3/8	7/8	3/8	2-1/2
IAE 500	1/2	1-1/4	1/2	3
IAE 625	5/8	1-5/8	5/8	3-1/2

unit: mm

TOLERANCE

D1	Tolerance	D2	Tolerance
1/32 ~ 3/4	+0.000 / -0.0012	.1182 ~ 1.000	h6

unit: inch

V70

HARDENED STEELS HRC70 SERIES

Recommended cutting condition for V70B

MATERIAL	Hardened Steels SKD61, SKT4		Hardened Steels SKD11, SKH51		Hardened Steels SKH, HAP	
	~HRC55		~HRC65		~HRC70	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
R1.5	22000	2200	18000	1800	10500	850
R2	16500	2200	13500	1800	8000	850
R2.5	13400	2200	11000	1850	6400	850
R3	11300	2300	9100	1850	5500	850
R4	8600	2350	7000	1900	4100	850
R5	7000	2350	5600	1900	3200	850
R6	5800	2300	4700	1850	2700	850

Depth of cut

HRC55
 $a_p = 0.1 D1$
 $a_e = 0.3 D1$

HRC65
 $a_p = 0.06 D1$
 $a_e = 0.18 D1$

HRC70
 $a_p = 0.05 D1$
 $a_e = 0.15 D1$

Recommended cutting condition for V70R

MATERIAL	Hardened Steels SKD61, SKT4		Hardened Steels SKD11, SKH51		Hardened Steels SKS, SKH	
	~HRC55		~HRC65		~HRC70	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
Dia. (D1)						
6	5050	420	4000	260	3500	200
8	3800	400	3000	250	2700	180
10	3050	360	2400	240	2100	160
12	2520	360	2000	230	1800	150

Depth of cut

$a_p = 1 D1$
 $a_e = 0.03 D1$

Recommended cutting condition for V70E

MATERIAL	Hardened Steels SKD61, SKT4		Hardened Steels SKD11		Hardened Steels SKS, SKH	
	~HRC55		~HRC65		~HRC70	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
Dia. (D1)						
6	13000	4600	6400	2400	4200	1450
8	10000	4600	4800	2400	3200	1450
10	7700	4600	4000	2400	2600	1450
12	6400	3800	3200	1900	2200	1200
16	4800	2900	2400	1400	1600	900

Depth of cut

HRC55
 $a_p \leq 1.5 D1$

Dia	ae(mm)
6	0.3
8	0.4
10	0.5
12	0.6
16	0.8

HRC65
 $a_p \leq 1.5 D1$

Dia	ae(mm)
6	0.2
8	0.2
10	0.3
12	0.3
16	0.5

HRC70
 $a_p \leq 1.0 D1$

Dia	ae(mm)
6	0.1
8	0.1
10	0.2
12	0.2
16	0.3


CUTTING CONDITION

IAE | END MILLS

MAGIC CUT HARDENED STEELS HRC65 SERIES


Recommended cutting condition for QBMS

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
R0.1	32000	500 - 600	32000	400 - 500	25000	300 - 400
R0.15	32000	500 - 600	32000	400 - 500	25000	300 - 400
R0.2	32000	500 - 600	32000	400 - 500	25000	300 - 400
R0.25	32000	600 - 700	32000	500 - 600	25000	400 - 500
R0.3	32000	600 - 700	32000	500 - 600	25000	400 - 500
R0.35	32000	700 - 800	32000	600 - 700	25000	500 - 600
R0.4	32000	900 - 1000	32000	800 - 900	25000	600 - 700
R0.45	32000	1000 - 1100	32000	900 - 1000	25000	600 - 700

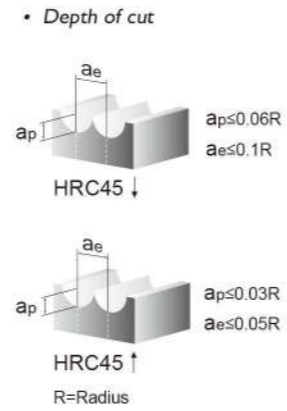


Recommended cutting condition for QB, QBGS, QBN, QBX, QBHN, QBHX, QBL.S.M.L, QBLX.MX.LX

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
R1	23000	2000	22000	1800	16000	900
R1.5	16000	2000	15000	1800	11000	900
R2	15000	2400	14000	2000	10000	1300
R3	17000	5500	14000	5000	9000	1500
R4	12000	4000	9000	3000	6200	1400
R5	9000	3500	7000	2800	5200	900
R6	8000	2800	6500	1800	4300	800
R8	7000	2000	5000	1500	3300	700

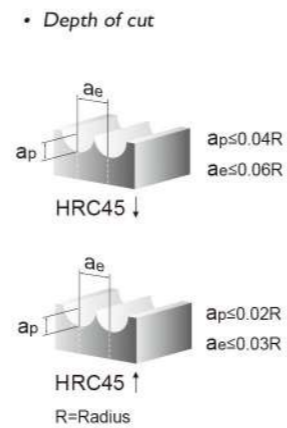


Recommended cutting condition for QBP

MATERIAL	Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Alloy Steels . Tool Steels SKD61		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
R1	45000	2000	18000	1500	12000	1200
R1.5	42000	2000	18000	1500	12000	1200
R2	15000	3000	18000	1500	12000	1200
R3	13000	5000	11000	3500	8000	1700
R4	9000	3000	8000	2000	4000	1400
R5	7500	2500	6500	1800	3500	1300

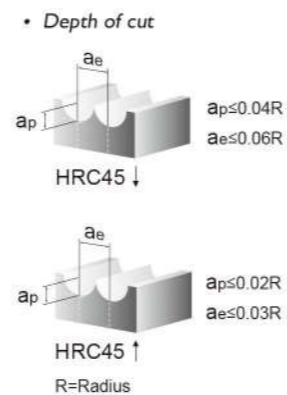


Recommended cutting condition for QEMS

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
0.2	40000	100 - 300	30000	80 - 250	15000	50 - 150
0.3	40000	100 - 350	30000	80 - 300	15000	50 - 200
0.4	40000	100 - 400	25000	80 - 350	10000	50 - 250
0.5	40000	100 - 500	25000	80 - 400	10000	50 - 250
0.6	38000	100 - 600	25000	80 - 500	8000	50 - 250
0.7	36000	100 - 700	20000	80 - 600	8000	50 - 250
0.8	34000	100 - 800	20000	80 - 700	8000	50 - 250
0.9	32000	100 - 1000	20000	80 - 800	8000	50 - 250

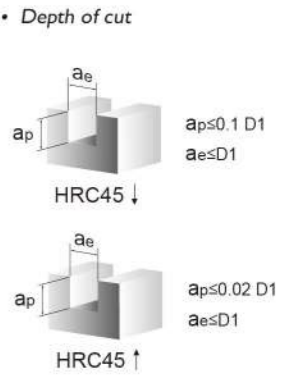


Recommended cutting condition for QEB, QEBGS, QEBN

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11		
	~HRC30		~HRC50		~HRC60		
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	
Side Milling	3	20000	2000	16000	1000	9000	500
	4	19000	2000	12000	1300	6000	550
	5	13000	1800	10000	1400	5000	500
	6	10000	3000	8000	1500	4500	700
	8	8000	3200	5000	1300	3500	600
	10	7000	3000	4500	1200	3000	500
Grooving	12	5000	2000	4000	1100	2000	500
	16	4000	1800	3500	1000	1800	450
	20	3500	1600	3000	1000	1300	450
	3	20000	2000	20000	1200	16000	1200
	4	16000	2000	16000	1200	12000	1300
	5	13000	1800	13000	1100	10000	1400
	6	10000	3000	10000	2100	8000	1500
	8	8000	2900	8000	1800	6000	1400
	10	7000	2800	6000	1700	5000	1300
	12	5000	2300	5500	1700	4500	1200
16	3500	1800	4500	1800	3500	1200	
20	3000	1400	3000	1500	2600	1100	

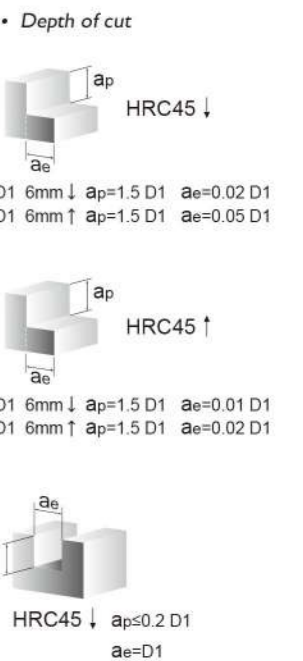

Recommended cutting condition for QEX


MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
3	9000	600	5500	310	3500	220
4	6000	600	5000	400	2200	220
5	4800	750	4000	400	1700	240
6	4500	800	3800	420	1600	300
8	3500	820	2800	420	1000	300
10	3000	820	1800	420	900	300
12	2000	820	1600	350	800	300
16	1500	650	1000	300	500	150
20	1200	600	900	300	400	150

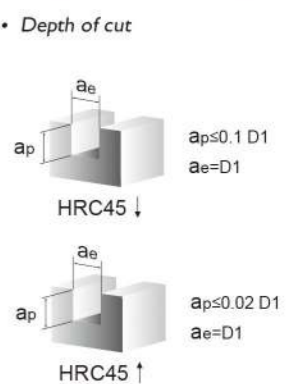

• Recommended cutting condition for **QELB**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
6	4500	800	3800	420	1600	300
8	3500	820	2800	420	1000	300
10	3000	820	1800	420	900	300
12	2000	820	1600	350	800	300


• Depth of cut



• Recommended cutting condition for **QBF**

MATERIAL		Alloy Steels . Tool Steels . Hardened Steels S45C, SCM, S50C, SKS, SCr, SNCM, SKD11, SKD61, NAK80			
Radius(R)	EFFECTIVE LENGTH	SPEED (min ⁻¹)	FEED mm / min	DEPTH OF CUT ap (mm)	
R0.25	4	30000 - 40000	200 - 650	0.015	
	6	30000 - 40000	200 - 650	0.013	
R0.3	4	27000 - 40000	180 - 650	0.025	
	6	27000 - 40000	180 - 650	0.015	
R0.4	6	25000 - 40000	400 - 750	0.025	
	8	25000 - 40000	400 - 750	0.025	
R0.5	6	20000 - 32000	300 - 750	0.04	
	8	20000 - 32000	300 - 750	0.03	
	10	20000 - 32000	300 - 750	0.025	
R0.6	12	20000 - 32000	300 - 750	0.015	
	8	22000 - 25000	500 - 600	0.05	
R0.75	12	22000 - 25000	500 - 600	0.03	
	8	18000 - 20000	350 - 550	0.07	
R0.8	12	18000 - 20000	350 - 550	0.04	
	16	18000 - 20000	350 - 550	0.03	
	20	18000 - 20000	350 - 550	0.02	
R1.0	8	13000 - 18000	350 - 800	0.08	
	12	13000 - 18000	350 - 800	0.06	
	16	13000 - 18000	350 - 800	0.05	
R1.5	8	12000 - 17000	500 - 900	0.1	
	12	12000 - 17000	500 - 900	0.1	
	16	12000 - 17000	500 - 900	0.07	
	20	12000 - 17000	500 - 900	0.04	
R2.0	8	8000 - 11000	500 - 700	0.17	
	10	8000 - 11000	500 - 700	0.15	
	16	8000 - 11000	500 - 700	0.14	
	20	8000 - 11000	500 - 700	0.12	
	25	8000 - 11000	500 - 700	0.1	
R2.0	10	5000 - 8000	400 - 600	0.18	
	15	5000 - 8000	400 - 600	0.17	
	20	5000 - 8000	400 - 600	0.16	
	25	5000 - 8000	400 - 600	0.15	
	30	5000 - 8000	400 - 600	0.14	


• Depth of cut



• Recommended cutting condition for **QRD, QRDGS, QRDN, QRHN, QRHX, QERC, QRHLX**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
2	26000	1600	16500	1000	7500	300
3	19000	1800	12000	1200	5400	360
4	16000	3200	10000	1900	4800	480
5	14000	3300	8000	2000	3800	500
6	12000	3600	7200	2200	3500	650
8	9600	4000	5600	2200	2700	750
10	7000	3400	4400	1700	2100	650
12	6000	2800	3600	1400	1800	600


• Depth of cut

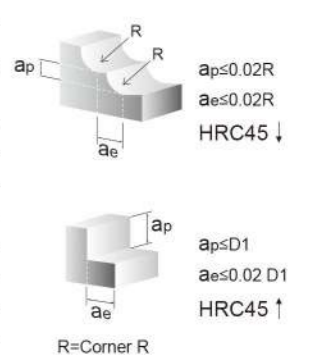

• Recommended cutting condition for **QEFAS**

MATERIAL		Alloy Steels . Tool Steels . Hardened Steels S45C, SCM, S50C, SKS, SCr, SNCM, SKD11, SKD61, NAK80		
Dia.(D1)	EFFECTIVE LENGTH	SPEED (min ⁻¹)	FEED mm / min	DEPTH OF CUT ap (mm)
1	4	25000	1500	0.05
	6	25000	1500	0.03
	10	25000	1500	0.01
1.5	4	15000	1200	0.10
	8	15000	1200	0.05
	10	15000	1200	0.025
2	12	15000	1200	0.018
	8	12000	900	0.20
	10	8800	700	0.12
3	12	7500	600	0.05
	16	7000	500	0.02
	8	8000	600	0.50
3	12	8000	600	0.45
	16	5500	450	0.18
	20	4000	300	0.15
3	10	6000	400	0.70
	16	6000	400	0.40


• Depth of cut



• Recommended cutting condition for **QRFAS**

MATERIAL		Alloy Steels . Tool Steels . Hardened Steels S45C, SCM, S50C, SKS, SCr, SNCM, SKD11, SKD61, NAK80		
Dia.(D1)	EFFECTIVE LENGTH	SPEED (min ⁻¹)	FEED mm / min	DEPTH OF CUT ap (mm)
1	4	30000	2200	0.15
	6	30000	2200	0.12
	8	30000	2200	0.12
	10	30000	2200	0.12
1.5	4	25000	1800	0.20
	6	25000	1800	0.18
	8	25000	1800	0.15
	10	25000	1800	0.15
	12	25000	1800	0.15
2	8	20000	1500	0.30
	10	20000	1500	0.30
	12	20000	1500	0.25
3	16	20000	1500	0.25
	8	12000	900	0.40
	12	12000	900	0.40
	16	12000	900	0.30
3	20	12000	900	0.30
	20	12000	900	0.30

• Depth of cut




SUPER MILL FOR HRC60 STEELS SERIES

• Recommended cutting condition for **SBM, SBMV**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCR, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
R0.1	32000	500 - 600	32000	400 - 500	25000	300 - 400
R0.15	32000	500 - 600	32000	400 - 500	25000	300 - 400
R0.2	32000	500 - 600	32000	400 - 500	25000	300 - 400
R0.25	32000	600 - 700	32000	500 - 600	25000	400 - 500
R0.3	32000	600 - 700	32000	500 - 600	25000	400 - 500
R0.35	32000	700 - 800	32000	600 - 700	25000	500 - 600
R0.4	32000	900 - 1000	32000	800 - 900	25000	600 - 700
R0.45	32000	1000 - 1100	32000	900 - 1000	25000	600 - 700


• Depth of cut



• Recommended cutting condition for **SB, SBK, SBX, SBL5.M.L, SBL5X.MX.LX**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCR, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
R0.5	45000	2000	45000	1800	28000	1000
R1	23000	2000	22000	1800	16000	900
R1.5	16000	2000	15000	1800	11000	900
R2	15000	2400	14000	2000	10000	1300
R3	13000	3200	11000	2000	9000	1500
R4	9000	2300	8000	1500	6200	1400
R5	7500	1900	6500	1200	5200	900
R6	6300	1600	5500	1000	4300	800
R8	4500	1200	3800	800	3300	700


• Depth of cut



• Recommended cutting condition for **SBB**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCR, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
R2	15000	3000	14000	2600	10000	1700
R3	13000	4000	11000	2600	9000	1900
R4	9000	2900	8000	1900	6200	1800
R5	7500	2400	6500	1500	5200	1100
R6	6300	2100	5500	1300	4300	1000
R8	4500	1500	3800	1000	3300	900
R10	3700	1200	3200	750	2600	600


• Depth of cut



• Recommended cutting condition for **SBC, SBCX**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCR, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
R1	23000	2000	22000	1800	16000	900
R1.5	16000	2000	15000	1800	11000	900
R2	15000	2400	14000	2000	10000	1300
R3	13000	3200	11000	2000	9000	1500


• Depth of cut



• Recommended cutting condition for **SEA, SELA**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCR, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
1	20000	80	15000	45	11000	30
1.5	13600	135	10000	60	9000	40
2	9600	150	8500	50	6000	45
3	6500	200	5800	75	4000	60
4	5500	250	4000	80	3200	60
5	4500	300	3000	80	2500	70
6	4000	300	2500	80	2200	70
8	3500	350	2200	90	1700	70
10	3000	400	2000	90	1500	70
12	2500	400	1500	100	1000	70
16	2000	400	1200	100	800	70


• Depth of cut



• Recommended cutting condition for **SEB, SEK, SEX, SELB**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCR, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
1	22000	400	18000	200	9000	140
1.5	12000	500	11000	280	5200	150
2	10000	550	10000	280	4600	170
3	9000	600	5500	310	3500	220
4	6000	600	5000	400	2200	220
5	4800	750	4000	400	1700	240
6	4500	800	3800	420	1600	300
8	3500	820	2800	420	1000	300
10	3000	820	1800	420	900	300
12	2000	820	1600	350	800	300
16	1500	650	1000	300	500	150
20	1200	600	900	300	400	150

• Depth of cut




CUTTING CONDITION

CUTTING CONDITION

• Recommended cutting condition for SEM, SEMV

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
Dia. (D1)						
0.2	40000	100 - 300	30000	80 - 250	15000	50 - 150
0.3	40000	100 - 350	30000	80 - 300	15000	50 - 200
0.4	40000	100 - 400	25000	80 - 350	10000	50 - 250
0.5	40000	100 - 500	25000	80 - 400	10000	50 - 250
0.6	38000	100 - 600	25000	80 - 500	8000	50 - 250
0.7	36000	100 - 700	20000	80 - 600	8000	50 - 250
0.8	34000	100 - 800	20000	80 - 700	8000	50 - 250
0.9	32000	100 - 1000	20000	80 - 800	8000	50 - 250


• Depth of cut



• Recommended cutting condition for SEP

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
Dia. (D1)						
3	20000	2000	16000	1000	9000	500
4	19000	2000	12000	1300	6000	550
5	13000	1800	10000	1400	5000	500
6	10000	3000	8000	1500	4500	700
8	8000	3200	5000	1300	3500	600
10	7000	3000	4500	1200	3000	500
12	5000	2000	4000	1100	2000	500
16	4000	1800	3500	1000	1800	450
20	3500	1600	3000	1000	1300	450
3	20000	2000	20000	1200	16000	1200
4	16000	2000	16000	1200	12000	1300
5	13000	1800	13000	1100	10000	1400
6	10000	3000	10000	2100	8000	1500
8	8000	2900	8000	1800	6000	1400
10	7000	2800	6000	1700	5000	1300
12	5000	2300	5500	1700	4500	1200
16	3500	1800	4500	1800	3500	1200
20	3000	1400	3000	1500	2600	1100


• Depth of cut

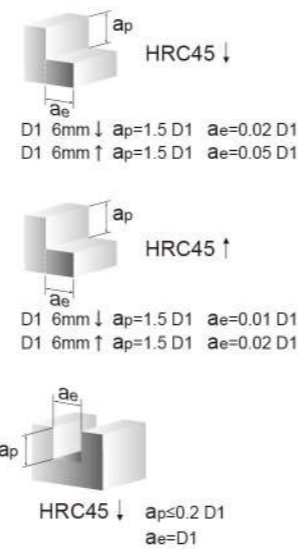

• Recommended cutting condition for SEW

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
Dia. (D1)						
3	22000	1800	16000	1300	10000	800
4	15000	1400	12000	1250	7000	700
5	13000	1600	10000	1400	6000	650
6	11500	1650	8500	1300	5000	800
8	8000	1800	6500	1350	3500	700
10	7000	1800	5000	1400	2800	750
12	6000	1700	4000	1300	2300	650
16	3560	1500	3000	1250	1800	700
20	3000	1450	2500	1250	1500	780


• Depth of cut



• Recommended cutting condition for SEPC

MATERIAL	Carbon Steels/Alloy Steels/Cast Irons SS/S45C/SCM/FC		Pre-Hardened Steels SKD11/SKD61...		Stainless Steels SUS304/SUS316L...	
	ap:1.0D1 ae:0.5D1		ap:1.0D1 ae:0.3D1		ap:1.0D1 ae:0.2D1	
Depth of cut	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
Dia. (D1)						
2	19100	860	12740	380	9550	430
2.5	15280	915	10200	300	7640	460
3	12740	955	8490	265	6370	570
3.5	10920	980	7280	230	5460	570
4	9550	1140	6370	200	4780	570
4.5	8490	1020	5660	170	4250	640
5	7640	1030	5090	150	3800	680
6	6370	1140	4250	130	3200	670
8	4780	1140	3180	110	2390	570
10	3820	1140	2550	90	1910	510
12	3180	950	2120	70	1590	470

• Depth of cut




MATERIAL	Carbon Steels/Alloy Steels/Cast Irons SS/S45C/SCM/FC		Pre-Hardened Steels SKD11/SKD61...		Stainless Steels SUS304/SUS316L...	
	ap:1.0D1		ap:0.5D1		ap:0.3D1	
Depth of cut	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
Dia. (D1)						
2	19100	510	12740	300	9550	345
2.5	15280	640	10200	240	7640	370
3	12740	660	8490	200	6370	450
3.5	10920	680	7280	170	5460	450
4	9550	800	6370	150	4780	450
4.5	8490	710	5660	130	4250	510
5	7640	720	5090	110	3800	540
6	6370	800	4250	100	3200	530
8	4780	800	3180	80	2390	450
10	3820	800	2550	60	1910	400
12	3180	670	2120	40	1590	380

• Recommended cutting condition for SELD

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
Dia. (D1)						
4	2000	80	1700	70	700	30
5	1800	110	1500	85	600	40
6	1500	110	1400	75	550	50
8	1300	110	1100	75	450	50
10	1000	110	800	75	300	50
12	900	110	700	75	250	40


• Depth of cut



• Recommended cutting condition for SHA

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
Dia. (D1)						
6	12000	3000	8000	2000	5600	1400
8	9000	2400	6700	1900	3600	1200
10	6900	2100	5000	1600	3000	900
12	6000	2400	4300	1700	2400	1000
16	4500	2100	2500	1000	1600	700

• Depth of cut




CUTTING CONDITION

CUTTING CONDITION

• Recommended cutting condition for SEZ

MATERIAL	Carbon Steels . Alloy Steels S45C , FC , FCD , SCM , S50C , SKS...		Alloy Steels . Tool Steels Scr , SNCM , SKD11 , SKD61 , NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
4	6000	600	5000	400	2200	220
5	4800	750	4000	400	1700	240
6	4500	800	3800	420	1600	300
8	3500	820	2800	420	1000	300
10	3000	820	1800	420	900	300
12	2000	820	1600	350	800	300


• Depth of cut



• Recommended cutting condition for SRA, SRC

MATERIAL	Carbon Steels . Alloy Steels S45C , FC , FCD , SCM , S50C , SKS...		Alloy Steels . Tool Steels Scr , SNCM , SKD11 , SKD61 , NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
3	7600	180	4800	120	2900	50
4	6500	260	4000	160	2500	55
5	5500	270	3200	160	2000	60
6	4800	300	2900	170	1800	70
8	3700	325	2200	170	1500	85
10	2900	280	1700	140	1100	70
12	2400	230	1400	120	1000	65
16	1800	170	1100	90	700	45


• Depth of cut



• Recommended cutting condition for SRW, SRB, SRD, SRDX, SRK, SERC, SERCX

MATERIAL	Carbon Steels . Alloy Steels S45C , FC , FCD , SCM , S50C , SKS...		Alloy Steels . Tool Steels Scr , SNCM , SKD11 , SKD61 , NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
2	26000	1600	16500	1000	7500	300
3	19000	1800	12000	1200	5400	360
4	16000	3200	10000	1900	4800	480
5	14000	3300	8000	2000	3800	500
6	12000	3600	7200	2200	3500	650
8	9600	4000	5600	2200	2700	750
10	7000	3400	4400	1700	2100	650
12	6000	2800	3600	1400	1800	600
16	4500	2000	2800	1000	1400	450


• Depth of cut

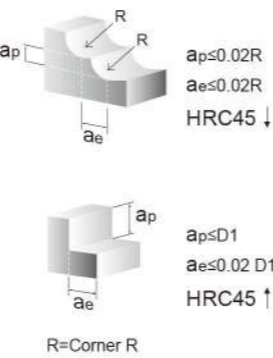

• Recommended cutting condition for SRP

MATERIAL	Carbon Steels . Alloy Steels S45C , FC , FCD , SCM , S50C , SKS...		Alloy Steels . Tool Steels Scr , SNCM , SKD11 , SKD61 , NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
6	12000	12000	8000	8000	5000	4000
8	10000	10000	8000	8000	6000	4800
10	7000	5000	6000	4000	4500	2000
12	5000	7000	4000	5000	3000	3000


• Depth of cut



• Recommended cutting condition for SBF . SBFV

MATERIAL	Alloy Steels . Tool Steels . Hardened Steels S45C , SCM , S50C , SKS , Scr , SNCM , SKD11 , SKD61 , NAK80			
	RADIUS(R)	EFFECTIVE LENGTH	SPEED (min ⁻¹)	FEED mm / min
R0.25	4	30000 - 40000	200 - 650	0.015
	6	30000 - 40000	200 - 650	0.013
R0.3	4	27000 - 40000	180 - 650	0.025
	6	27000 - 40000	180 - 650	0.015
R0.4	6	25000 - 40000	400 - 750	0.025
	8	25000 - 40000	400 - 750	0.025
R0.5	6	20000 - 32000	300 - 750	0.04
	8	20000 - 32000	300 - 750	0.03
	10	20000 - 32000	300 - 750	0.025
	12	20000 - 32000	300 - 750	0.015
R0.6	8	22000 - 25000	500 - 600	0.05
	12	22000 - 25000	500 - 600	0.03
R0.75	8	18000 - 20000	350 - 550	0.07
	12	18000 - 20000	350 - 550	0.04
	16	18000 - 20000	350 - 550	0.03
	20	18000 - 20000	350 - 550	0.02
R0.8	8	13000 - 18000	350 - 800	0.08
	12	13000 - 18000	350 - 800	0.06
	16	13000 - 18000	350 - 800	0.05
R1.0	8	12000 - 17000	500 - 900	0.10
	12	12000 - 17000	500 - 900	0.10
	16	12000 - 17000	500 - 900	0.07
	20	12000 - 17000	500 - 900	0.04
R1.5	8	8000 - 11000	500 - 700	0.17
	10	8000 - 11000	500 - 700	0.15
	16	8000 - 11000	500 - 700	0.14
	20	8000 - 11000	500 - 700	0.12
	25	8000 - 11000	500 - 700	0.10
R2.0	10	5000 - 8000	400 - 600	0.18
	15	5000 - 8000	400 - 600	0.17
	20	5000 - 8000	400 - 600	0.16
	25	5000 - 8000	400 - 600	0.15
	30	5000 - 8000	400 - 600	0.14


• Depth of cut



• Recommended cutting condition for SEFA, SEFAV

MATERIAL	Alloy Steels . Tool Steels . Hardened Steels S45C , SCM , S50C , SKS , Scr , SNCM , SKD11 , SKD61 , NAK80			
	Dia.(D1)	EFFECTIVE LENGTH	SPEED (min ⁻¹)	FEED mm / min
1	4	25000	1500	0.05
	6	25000	1500	0.03
	10	25000	1500	0.01
1.5	4	15000	1200	0.10
	8	15000	1200	0.05
	10	15000	1200	0.025
	12	15000	1200	0.018
2	8	12000	900	0.20
	10	8800	700	0.12
	12	7500	600	0.05
	16	7000	500	0.02
3	10	8000	600	0.50
	12	8000	600	0.45
	16	5500	450	0.18
	20	4000	300	0.15
	25	6000	400	0.10


• Depth of cut



• Recommended cutting condition for SEF . SEFV

MATERIAL	Alloy Steels . Tool Steels . Hardened Steels S45C , SCM , S50C , SKS , Scr , SNCM , SKD11 , SKD61 , NAK80			
	Dia.(D1)	EFFECTIVE LENGTH	SPEED (min ⁻¹)	FEED mm / min
1	4	30000	2200	0.15
	6	30000	2200	0.12
	8	30000	2200	0.12
	10	30000	2200	0.12
1.5	4	25000	1800	0.20
	6	25000	1800	0.18
	8	25000	1800	0.15
	10	25000	1800	0.15
2	12	25000	1800	0.15
	8	20000	1500	0.30
	10	20000	1500	0.30
	12	20000	1500	0.25
3	16	20000	1500	0.25
	8	12000	900	0.40
	12	12000	900	0.40
	16	12000	900	0.30
20	12000	900	0.30	

• Depth of cut



CUTTING CONDITION

CUTTING CONDITION

• Recommended cutting condition for **BM**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
HARDNESS	~HRC30		~HRC50		~HRC60	
Radius (R)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
R0.1	32000	500 - 600	32000	400 - 500	25000	300 - 400
R0.15	32000	500 - 600	32000	400 - 500	25000	300 - 400
R0.2	32000	500 - 600	32000	400 - 500	25000	300 - 400
R0.25	32000	600 - 700	32000	500 - 600	25000	400 - 500
R0.3	32000	600 - 700	32000	500 - 600	25000	400 - 500
R0.35	32000	700 - 800	32000	600 - 700	25000	500 - 600
R0.4	32000	900 - 1000	32000	800 - 900	25000	600 - 700
R0.45	32000	1000 - 1100	32000	900 - 1000	25000	600 - 700

• Depth of cut

HRC45 ↓

HRC45 ↑

R=Radius

• Recommended cutting condition for **BA, BS, BLS, BLM, BLL**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
HARDNESS	~HRC30		~HRC50		~HRC60	
Radius (R)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
R0.5	45000	800	35000	600	20000	200
R1	23000	800	18000	600	10000	200
R1.5	16000	1000	12000	600	6500	200
R2	12000	1000	9500	700	5000	300
R3	8000	1100	6000	700	3500	300
R4	6000	1200	5000	800	2500	350
R5	5000	1100	4000	800	2000	350
R6	4000	1000	3000	700	1500	300
R8	3000	1000	2000	700	1000	300

• Depth of cut

HRC45 ↓

HRC45 ↑

R=Radius

• Recommended cutting condition for **BB**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
HARDNESS	~HRC30		~HRC50		~HRC60	
Radius (R)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
R2	12000	1200	9500	900	5000	400
R3	8000	1400	6000	900	3500	500
R4	6000	1600	5000	1000	2500	600
R5	5000	1400	4000	1000	2000	600
R6	4000	1200	3000	900	1500	500
R8	3000	1200	2500	900	1000	500
R10	2500	1000	2000	600	900	300

• Depth of cut

HRC45 ↓

HRC45 ↑

R=Radius

• Recommended cutting condition for **EM**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
HARDNESS	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
0.4	40000	100 - 400	25000	80 - 350	10000	50 - 250
0.5	40000	100 - 500	25000	80 - 400	10000	50 - 250
0.6	38000	100 - 600	25000	80 - 500	8000	50 - 250
0.7	36000	100 - 700	20000	80 - 600	8000	50 - 250
0.8	34000	100 - 800	20000	80 - 700	8000	50 - 250
0.9	32000	100 - 1000	20000	80 - 800	8000	50 - 250

• Depth of cut

HRC45 ↓

HRC45 ↑

• Recommended cutting condition for **EA, ES, ELA**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
HARDNESS	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
1	20000	80	15000	45	11000	30
1.5	13600	135	10000	60	9000	40
2	9600	150	8500	50	6000	45
3	6500	200	5800	75	4000	60
4	5500	250	4000	80	3200	60
5	4500	300	3000	80	2500	70
6	4000	300	2500	80	2200	70
8	3500	350	2200	90	1700	70
10	3000	400	2000	90	1500	70
12	2500	400	1500	100	1000	70
16	2000	400	1200	100	800	70

• Depth of cut

HRC45 ↓

HRC45 ↑

• Recommended cutting condition for **EB, ELB**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
HARDNESS	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
1	22000	400	18000	200	9000	140
1.5	12000	500	11000	280	5200	150
2	10000	550	10000	280	4600	170
3	9000	600	5500	310	3500	220
4	6000	600	5000	400	2200	220
5	4800	750	4000	400	1700	240
6	4500	800	3800	420	1600	300
8	3500	820	2800	420	1000	300
10	3000	820	1800	420	900	300
12	2000	820	1600	350	800	300
16	1500	650	1000	300	500	150
20	1200	600	900	300	400	150

• Depth of cut


HRC45 ↓

HRC45 ↑

• Recommended cutting condition for EC, EP


MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
HARDNESS	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
3	8000	550(300)	5500	300(100)	3500	200 (95)
4	6500	550(300)	4500	300(100)	2200	200 (95)
5	5000	800(400)	3600	350(120)	1800	210(100)
6	4000	800(400)	2800	350(120)	1500	210(110)
8	3500	800(400)	2600	350(120)	1300	210(100)
10	2500	800(400)	2000	350(120)	1100	210(100)
12	1800	750(350)	1500	350(120)	700	210(100)
16	1400	700(300)	1000	300(100)	500	170 (70)

() Grooving

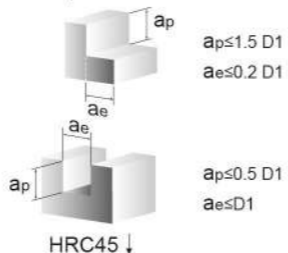

• Depth of cut
ap ≤ 1.5 D1
ae ≤ 0.2 D1

HRC45 ↓

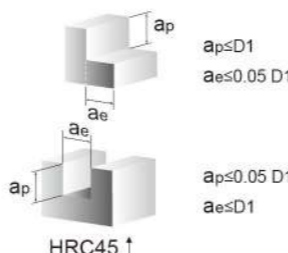

• Depth of cut
ap ≤ D1
ae ≤ 0.05 D1

HRC45 ↑

• Recommended cutting condition for ELC

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
HARDNESS	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
2	3000	25	1700	20	1000	15
3	2300	35	1900	25	800	10
4	2000	45	1600	35	650	15
5	1800	40	1400	40	600	20
6	1700	60	1300	50	550	25
8	1300	60	1000	50	450	25
10	1000	60	800	50	350	25
12	800	60	700	50	300	25



• Depth of cut
ap ≤ 0.15 D1
ae = D1

HRC45 ↓



• Depth of cut
ap ≤ 0.02 D1
ae = D1

HRC45 ↑

• Recommended cutting condition for ELD

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
HARDNESS	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
2	3000	50	2500	40	1000	15
3	2500	60	2000	50	800	20
4	2000	80	1700	70	700	30
5	1800	110	1500	85	600	40
6	1500	110	1400	75	550	50
8	1300	110	1100	75	450	50
10	1000	110	800	75	300	50
12	900	110	700	75	250	40
16	800	95	500	70	150	20
20	500	80	400	60	120	20



• Depth of cut
ap ≤ 2.5 D1
ae ≤ 0.05 D1

HRC45 ↓




• Depth of cut
ap ≤ 2 D1
ae ≤ 0.02 D1

HRC45 ↑


• Recommended cutting condition for ED

MATERIAL	Carbon Steels.. SS/S45C/SCM/FC		Stainless Steels SUS304/SUS316L		Titanium Ti6AL-4V	
Depth of cut	ap:1D1 ae:0.5D1		ap:1D1 ae:0.5D1		ap:1D1 ae:0.5D1	
Dia. (D1)	Speed (min ⁻¹)	Feed mm/min	Speed (min ⁻¹)	Feed mm/min	Speed (min ⁻¹)	Feed mm/min
3	12730	1020	8490	440	8490	440
4	9550	1150	6370	500	6370	500
5	7640	1220	5095	510	5095	510
6	6370	1220	4250	510	4250	510
8	4780	1150	3185	550	3185	550
10	3820	1220	2550	580	2550	580
12	3180	1020	2125	510	2125	510
16	2390	960	1595	450	1595	450

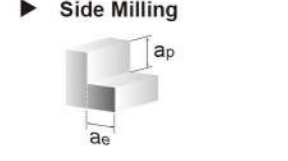

• Depth of cut

▶ Side Milling

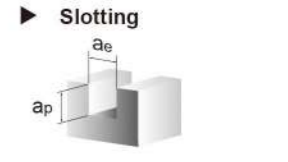

• Depth of cut

▶ Slotting

MATERIAL	Carbon Steels.. SS/S45C/SCM/FC		Stainless Steels SUS304/SUS316L		Titanium Ti6AL-4V	
Depth of cut	ap:1D1		ap:1D1		ap:1D1	
Dia. (D1)	Speed (min ⁻¹)	Feed mm/min	Speed (min ⁻¹)	Feed mm/min	Speed (min ⁻¹)	Feed mm/min
3	11450	590	7400	240	7400	240
4	8590	680	5600	250	5600	250
5	6870	750	4500	300	4500	300
6	5730	840	3700	330	3700	330
8	4300	820	2800	330	2800	330
10	3430	850	2200	340	2200	340
12	2860	760	1900	310	1900	310
16	2150	720	1400	280	1400	280

• Recommended cutting condition for EH

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
HARDNESS	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
6	5500	1000	4500	850	3800	650
8	4000	1000	3500	850	3000	650
10	3300	1000	3100	850	2400	650
12	3000	900	2500	700	2000	600
16	2500	700	2000	550	1500	450
20	1800	550	1500	420	1200	380



• Depth of cut
ap ≤ 1.5 D1
ae ≤ 0.1 D1

HRC45 ↓



• Depth of cut
ap ≤ D1
ae ≤ 0.05 D1

HRC45 ↑

• Recommended cutting condition for EHL

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
HARDNESS	~HRC30		~HRC50		~HRC60	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
6	1900	400	1500	300	1200	220
8	1500	380	1100	280	900	200
10	1200	360	850	260	750	190
12	1000	340	700	230	650	180
16	750	280	550	200	450	150
20	600	240	450	170	350	120



• Depth of cut
ap ≤ 3 D1
ae ≤ 0.01 D1

HRC45 ↓



• Depth of cut
ap ≤ 3 D1
ae ≤ 0.005 D1

HRC45 ↑

• Recommended cutting condition for **EG, EGA**


MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11		
	~HRC30		~HRC50		~HRC60		
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	
Side Milling	6	5500	550	3000	310	1150	120
	8	4600	550	2500	310	920	120
	10	3700	550	2000	310	730	120
	12	3000	500	1700	310	600	120
	16	2300	520	1200	310	460	120
Grooving	6	4400	440	2400	250	920	100
	8	3600	440	2000	250	730	100
	10	3000	440	1600	250	580	100
	12	2400	440	1350	250	480	100
	16	1800	440	960	250	370	100

• Depth of cut

Side Milling




Grooving



• Recommended cutting condition for **ET, ETL (Dia 1-4)**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
1	12000	65	6800	40	2500	15
1.5	9600	70	5200	45	2000	15
2	7500	85	4000	48	1500	18
2.5	6800	100	3700	60	1700	20
4	3500	120	1800	60	600	20
6	2500	150	1600	80	550	25
8	2000	150	1200	80	450	25
10	1500	150	1000	80	350	25


• Depth of cut



• Recommended cutting condition for **ERA**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
3	7600	180	4800	120	2900	50
4	6500	260	4000	160	2500	55
5	5500	270	3200	160	2000	60
6	4800	300	2900	170	1800	70
8	3700	325	2200	170	1500	85
10	2900	280	1700	140	1100	70
12	2400	230	1400	120	1000	65
16	1800	170	1100	90	700	45



• Depth of cut



• Recommended cutting condition for **ERB, ERC**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
3	9500	450	6000	290	3600	120
4	8000	800	5000	480	3200	160
5	6800	820	4000	500	2500	170
6	6000	900	3600	530	2300	220
8	4600	1000	2800	530	1800	250
10	3500	850	2200	420	1400	220
12	3000	720	1800	350	1200	200
16	2300	520	1400	250	900	150

• Depth of cut



R=Corner R

• Recommended cutting condition for **BF**

MATERIAL	Alloy Steels . Tool Steels . Hardened Steels S45C, SCM, S50C, SKS, SCr, SNCM, SKD11, SKD61, NAK80			
	RADIUS(R)	EFFECTIVE LENGTH	SPEED (min ⁻¹)	FEED mm / min
R0.5	6	20000 - 32000	300 - 750	0.04
	8	20000 - 32000	300 - 750	0.03
	10	20000 - 32000	300 - 750	0.025
	12	20000 - 32000	300 - 750	0.015
R0.75	8	18000 - 20000	350 - 550	0.07
	12	18000 - 20000	350 - 550	0.04
	16	18000 - 20000	350 - 550	0.03
	20	18000 - 20000	350 - 550	0.02
R1.0	8	12000 - 17000	500 - 900	0.10
	12	12000 - 17000	500 - 900	0.10
	16	12000 - 17000	500 - 900	0.07
	20	12000 - 17000	500 - 900	0.04
R1.5	8	8000 - 11000	500 - 700	0.17
	10	8000 - 11000	500 - 700	0.15
	16	8000 - 11000	500 - 700	0.14
	20	8000 - 11000	500 - 700	0.12
	25	8000 - 11000	500 - 700	0.10
R2.0	10	5000 - 8000	400 - 600	0.18
	15	5000 - 8000	400 - 600	0.17
	20	5000 - 8000	400 - 600	0.16
	25	5000 - 8000	400 - 600	0.15
	30	5000 - 8000	400 - 600	0.14

• Depth of cut




R < 1 ae < 0.1R
R > 1 ae < 0.2R
R = Radius

• Recommended cutting condition for **EFA**

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	~HRC30		~HRC50		~HRC60	
HARDNESS	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
1	4	25000	1500	0.05		
	6	25000	1500	0.03		
	10	25000	1500	0.01		
1.5	4	15000	1200	0.10		
	8	15000	1200	0.05		
	10	15000	1200	0.025		
	12	15000	1200	0.018		
2	8	12000	900	0.20		
	10	8800	700	0.12		
	12	7500	600	0.05		
	16	7000	500	0.02		
3	8	8000	600	0.50		
	12	8000	600	0.45		
	16	5500	450	0.18		
4	20	4000	300	0.15		
	10	6000	400	0.7		
	16	6000	400	0.4		

• Depth of cut




ae = D1

• Recommended cutting condition for **SBBIV**

Material	Carbon Steels Alloy Steels/Cast Irons		Pre-Hardened Steels		Stainless Steels		Titanium Alloys		Superalloy	
	SS/S45C/SCM/FC		SKD11/SKD61...		SUS304/SUS316L...		Ti6AL-4V...		Inconel 718...	
Depth of cut	ap:0.25-1.2mm ae:0.75-3mm		ap:0.25-1.2mm ae:0.75-3mm		ap:0.25-1.2mm ae:0.75-3mm		ap:0.25-1.2mm ae:0.75-3mm		ap:0.13-0.6mm ae:0.3-1.2mm	
Radius (R)	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
R1.5	19100	2900	19100	2900	12740	1500	12740	1500	3180	254
R2	14330	2500	14330	2500	9550	1350	9550	1350	2390	191
R2.5	11460	2230	11460	2230	7640	1190	7640	1190	1910	191
R3	9550	1900	9550	1900	6370	1110	6370	1110	1590	160
R4	7160	1700	7160	1700	4780	1090	4780	1090	1190	140
R5	5730	1600	5730	1600	3820	1030	3820	1030	960	135
R6	4780	1590	4780	1590	3190	1020	3190	1020	800	110

• Depth of cut




• Recommended cutting condition for **SEIV**

MATERIAL	Stainless Steels		Titanium alloy		Inconel 718	
	ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1	
Depth of cut	ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
6	4600	590	4600	590	2600	230
8	3500	560	3500	560	2000	220
10	2700	535	2700	535	1600	200
12	2400	520	2400	520	1400	170
16	1700	450	1700	450	1000	130
20	1400	450	1400	450	800	100


MATERIAL	Stainless Steels		Titanium alloy		Inconel 718	
	ap=0.5D1 ae=1D1		ap=0.2D1 ae=1D1		ap=0.2D1 ae=1D1	
Depth of cut	ap=0.5D1 ae=1D1		ap=0.2D1 ae=1D1		ap=0.2D1 ae=1D1	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
6	3000	375	2600	335	1200	105
8	2200	360	2000	320	900	90
10	1800	335	1600	310	750	80
12	1500	330	1300	300	600	70
16	1100	290	1000	250	450	50
20	900	290	800	250	360	40

• Depth of cut

• Side Milling



• Slotting




• Recommended cutting condition for **SEPS**

MATERIAL	Carbon Steels..		Alloy Steels.Tool Steels		Stainless Steels	
	SS/S45C/SCM/FC		SCr.SNCM.SKD11.SKD61.NAK80...		SUS304/SUS316/Ti6AL-4V..	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
3	11000	770	9100	400	7700	350
4	8400	1000	6700	500	5600	370
5	7000	1000	5300	500	4500	380
6	5600	1000	4500	540	3700	400
8	4200	900	3400	500	2800	420
10	4000	800	2700	440	2300	470
12	2800	700	2300	400	1900	460
16	2100	600	1700	350	1400	340
20	1800	500	1400	280	1100	270

• Depth of cut

▶ Slotting



Diameter (D1)	ap(mm)
3	1.5
4	2.0
5	2.5
6	3.0
8	4.0
10	5.0
12	6.0
16	6.0
20	6.0


• Recommended cutting condition for **SEPIV**

MATERIAL	Stainless Steels		Titanium alloy		Inconel 718	
	ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1	
Depth of cut	ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
6	4600	590	4600	590	2600	230
8	3500	560	3500	560	2000	220
10	2700	535	2700	535	1600	200
12	2400	520	2400	520	1400	170
16	1700	450	1700	450	1000	130
20	1400	450	1400	450	800	100


MATERIAL	Stainless Steels		Titanium alloy		Inconel 718	
	ap=0.5D1 ae=1D1		ap=0.2D1 ae=1D1		ap=0.2D1 ae=1D1	
Depth of cut	ap=0.5D1 ae=1D1		ap=0.2D1 ae=1D1		ap=0.2D1 ae=1D1	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
6	3000	375	2600	335	1200	105
8	2200	360	2000	320	900	90
10	1800	335	1600	310	750	80
12	1500	330	1300	300	600	70
16	1100	290	1000	250	450	50
20	900	290	800	250	360	40

• Depth of cut

• Side Milling



• Slotting




• Recommended cutting condition for **SIBV**

MATERIAL	Stainless Steels		Titanium alloy		Inconel 718	
	ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1	
Depth of cut	ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
6	4600	740	4600	740	2600	290
8	3500	700	3500	700	2000	275
10	2700	670	2700	670	1600	250
12	2400	650	2400	650	1400	210
16	1700	560	1700	560	1000	160
20	1400	560	1400	560	800	120


MATERIAL	Stainless Steels		Titanium alloy		Inconel 718	
	ap=0.5D1 ae=1D1		ap=0.2D1 ae=1D1		ap=0.2D1 ae=1D1	
Depth of cut	ap=0.5D1 ae=1D1		ap=0.2D1 ae=1D1		ap=0.2D1 ae=1D1	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
6	3000	470	2600	420	1200	130
8	2200	450	2000	400	900	110
10	1800	420	1600	390	750	100
12	1500	410	1300	370	600	85
16	1100	360	1000	310	450	60
20	900	360	800	310	360	50

• Depth of cut

• Side Milling



• Slotting



• Recommended cutting condition for **SHAIV**

MATERIAL	Stainless Steels		Titanium alloys		Superalloy	
	SUS304/SUS316L..		Ti6AL-4V..		Inconel 718..	
Depth of cut	ap:D1 ae:0.05D1		ap:D1 ae:0.05D1		ap:D1 ae:0.05D1	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
6	4250	920	3700	800	2100	320
8	3200	900	2800	790	1600	300
10	2550	760	2200	670	1300	260
12	2100	840	1850	740	1100	230
16	1600	740	1400	640	800	180

• Depth of cut

• Side Milling




• Recommended cutting condition for **SEGIV**


MATERIAL	SUS304/SUS316L		Ti6AL-4V		Inconel 718		
Depth of cut	ap=1D1 ae=0.3D1		ap=1D1 ae=0.3D1		ap=1D1 ae=0.2D1		
Side Milling	Dia. (D1)	SPEED (min⁻¹)	FEED mm / min	SPEED (min⁻¹)	FEED mm / min	SPEED (min⁻¹)	FEED mm / min
	6	2650	210	1590	125	1060	65
	8	1990	240	1200	120	800	50
	10	1590	255	960	155	640	50
	12	1330	240	800	160	530	55
	16	990	200	600	130	400	50
	20	800	165	480	110	320	50
Slotting	Dia. (D1)	SPEED (min⁻¹)	FEED mm / min	SPEED (min⁻¹)	FEED mm / min	SPEED (min⁻¹)	FEED mm / min
	6	2650	210	1590	125	1060	65
	8	1990	240	1200	120	800	50
	10	1590	255	960	155	640	50
	12	1330	240	800	160	530	55
	16	990	200	600	130	400	50
	20	800	165	480	110	320	50

• Depth of cut

• Side Milling



• Slotting




• Recommended cutting condition for **SIW**


MATERIAL	Carbon Steels Alloy Steels/Cast Irons SS/S45C/SCM/FC		Pre-Hardened Steels SKD11/SKD61...		Stainless Steels SUS304/SUS316L...		Titanium Alloys Ti6AL-4V...		Superalloy Inconel 718...		
Depth of cut	ap:1D1 ae:0.2D1		ap:1D1 ae:0.2D1		ap:1D1 ae:0.2D1		ap:1D1 ae:0.1D1		ap:1D1 ae:0.05D1		
Side Milling	Dia. (D1)	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min
	3	12730	1530	8490	510	6370	440	6370	440	3200	90
	4	9550	1530	6370	510	4780	500	4780	500	2400	96
	5	7640	1530	5100	510	3820	510	3820	510	1910	96
	6	6370	1530	4250	680	3180	510	3180	510	1595	96
	8	4780	1530	3180	760	2390	550	2390	550	1195	100
	10	3820	1530	2550	710	1910	580	1910	580	955	110
	12	3180	1270	2120	590	1590	510	1590	510	800	96
	16	2390	1145	1590	510	1190	450	1190	450	600	96
	20	1910	1070	1270	460	955	410	955	410	480	96
Slotting	Dia. (D1)	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min
	3	11450	590	6660	270	5830	200	5830	200	2880	35
	4	8590	680	5040	320	4380	200	4380	200	2160	43
	5	6870	750	4050	360	3500	240	3500	240	1720	48
	6	5730	840	3330	400	3700	270	3700	270	1440	56
	8	4300	820	2520	410	2190	270	2190	270	1080	50
	10	3430	850	1980	420	1750	280	1750	280	860	48
	12	2860	760	1710	370	1460	250	1460	250	720	46
	16	2150	720	1260	340	1095	220	1095	220	540	43
	20	1710	680	990	320	875	215	875	215	430	41

• Depth of cut

• Side Milling



• Slotting




• Recommended cutting condition for **SRIPV**


MATERIAL	Stainless Steels		Titanium alloy		Inconel 718		
Depth of cut	ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1		ap=1D1 ae=0.05D1		
Side Milling	Dia. (D1)	SPEED (min⁻¹)	FEED mm / min	SPEED (min⁻¹)	FEED mm / min	SPEED (min⁻¹)	FEED mm / min
	6	4600	590	4600	590	2600	230
	8	3500	560	3500	560	2000	220
	10	2700	535	2700	535	1600	200
	12	2400	520	2400	520	1400	170
	16	1700	450	1700	450	1000	130
	20	1400	450	1400	450	800	100
Slotting	Dia. (D1)	SPEED (min⁻¹)	FEED mm / min	SPEED (min⁻¹)	FEED mm / min	SPEED (min⁻¹)	FEED mm / min
	6	3000	375	2600	335	1200	105
	8	2200	360	2000	320	900	90
	10	1800	335	1600	310	750	80
	12	1500	330	1300	300	600	70
	16	1100	290	1000	250	450	50
	20	900	290	800	250	360	40

• Depth of cut

• Side Milling



• Slotting




• Recommended cutting condition for **SIRW**


MATERIAL	Carbon Steels Alloy Steels/Cast Irons SS/S45C/SCM/FC		Pre-Hardened Steels SKD11/SKD61...		Stainless Steels SUS304/SUS316L...		Titanium Alloys Ti6AL-4V...		Superalloy Inconel 718...		
Depth of cut	ap:1.5D1 ae:0.2D1		ap:1D1 ae:0.05D1		ap:1D1 ae:0.1D1		ap:0.8D1 ae:0.05D1		ap:0.8D1 ae:0.05D1		
Side Milling	Dia. (D1)	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min
	2	19900	1200	11150	800	10350	415	10350	415	5890	190
	3	13270	1330	7430	595	6900	550	6900	550	3930	250
	4	9950	1190	5570	670	5180	520	5180	520	2950	240
	5	7960	1270	4460	625	4140	500	4140	500	2360	230
	6	6630	1460	3710	670	3450	520	3450	520	1960	300
	8	4970	1390	2780	700	2590	465	2590	465	1470	280
	10	3980	1270	2230	625	2070	480	2070	480	1200	250
	12	3320	1260	1860	560	1730	450	1730	450	980	220
Slotting	Dia. (D1)	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min	SPEED (min⁻¹)	FEED mm/min
	2	17500	700	8760	420	9550	230	9550	230	4780	115
	3	11670	700	5840	420	6370	230	6370	230	3180	115
	4	8750	700	4380	350	4780	215	4780	215	2390	105
	5	7000	840	3500	420	3820	230	3820	230	1910	115
	6	5840	840	2920	410	3180	240	3180	240	1590	120
	8	4380	875	2190	395	2390	215	2390	215	1190	104
	10	3500	880	1750	370	1910	230	1910	230	950	115
	12	2920	800	1460	350	1590	215	1590	215	800	105

• Depth of cut

• Side Milling



• Slotting




CUTTING CONDITION

CUTTING CONDITION

• Recommended cutting condition for DB, DBX

MATERIAL	Aluminum 1070		Aluminum alloy 2014 / 4032 / 5052 / 6061 / 7075		Aluminum alloy AC85	
	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
Radius (R)						
R0.5	50000	2300	37000	2000	50000	1400
R0.75	50000	3000	28000	2000	50000	1800
R1	44000	4000	18500	2000	44000	2500
R1.5	28000	4000	11500	2000	28000	2500
R2	22000	4000	8800	2000	22000	2500
R3	16000	4000	6400	2000	16000	2500
R4	12000	4000	4800	2000	12000	2500
R5	10000	4000	4000	2000	10000	2500
R6	8000	4000	3200	2000	8000	2500


• Depth of cut



• Recommended cutting condition for DEL

MATERIAL	Aluminum 1070		Aluminum alloy 2014 / 4032 / 5052 / 6061 / 7075		Aluminum alloy AC85	
	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
Dia. (D1)						
2	30000	600(500)	15000	250(250)	18000	300(300)
3	26000	600(500)	11000	250(250)	13500	300(350)
4	20000	600(550)	8500	250(250)	10000	300(350)
5	15600	600(550)	6700	250(200)	8000	300(350)
6	13500	600(550)	5500	250(200)	6700	300(350)
8	10000	600(600)	4200	250(200)	5000	300(350)
10	7500	600(600)	3300	250(200)	4000	300(350)
12	6700	600(600)	2700	250(200)	3400	300(350)
16	5000	600(500)	2300	250(200)	2500	300(350)
20	4000	600(500)	1700	250(200)	2000	300(350)

• Depth of cut




() : Grooving

• Recommended cutting condition for DEA, DEB

MATERIAL	Aluminum 1070		Aluminum alloy 2014 / 4032 / 5052 / 6061 / 7075		Aluminum alloy AC85	
	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
Dia. (D1)						
2	37000	2000(800)	16000	850(350)	20000	1100(450)
3	35000	2000(900)	14000	850(450)	18000	1100(550)
4	26000	2000(1100)	11000	850(550)	13000	1100(660)
5	21000	2000(1100)	9000	850(550)	10000	1100(660)
6	17000	2000(1100)	7000	850(550)	9000	1100(660)
8	13000	2000(1100)	5500	850(650)	7000	1100(800)
10	11000	2000(1300)	4400	850(650)	5500	1100(800)
12	8800	2000(1300)	3600	850(800)	4500	1100(800)
16	6500	2000(1100)	3000	850(550)	3500	1100(900)

• Depth of cut



() : Grooving

• Recommended cutting condition for DEPW, DEPWS


MATERIAL	Aluminums A1050/A1070		Aluminum Alloys A2017/A5052/A7075		Aluminum Alloy Castings AC/ADC		
	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min	
Depth of cut	ap:1.5D1 ae:0.3D1		ap:1.5D1 ae:0.3D1		ap:1.5D1 ae:0.3D1		
Side Milling	Dia. (D1)						
	3	20000	3600	20000	3000	20000	3600
	4	20000	3600	20000	3000	19900	3600
	5	20000	3600	17200	3000	15920	3600
	6	15920	3340	14330	3000	13270	2790
	8	11940	2860	10750	2580	9950	2380
Slotting	Dia. (D1)						
	3	18000	2700	19100	2700	14860	2700
	4	15920	2300	15920	2300	11140	2300
	5	12740	2300	14000	2000	8920	1600
	6	10620	1910	11670	1750	7430	1330
	8	7960	1910	8750	1750	5570	1330
Slotting	10	6370	1720	7000	1680	4460	1200
	12	5300	1590	5840	1570	3710	1110

• Depth of cut

• Side Milling




• Slotting



• Recommended cutting condition for DEC, DED, DEDP, DEDX

MATERIAL	Aluminum 1070		Aluminum alloy 2014 / 4032 / 5052 / 6061 / 7075		Aluminum alloy AC85	
	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min
Dia. (D1)						
2	37000	2400(950)	16000	1000(380)	20000	1300(500)
3	35000	2400(1050)	14000	1000(500)	18000	1300(600)
4	26000	2400(1200)	11000	1000(600)	13000	1300(720)
5	21000	2400(1200)	9000	1000(600)	10000	1300(720)
6	17000	2400(1200)	7000	1000(600)	9000	1300(720)
8	13000	2400(1200)	5500	1000(700)	7000	1300(880)
10	11000	2400(1400)	4400	1000(700)	5500	1300(880)
12	8800	2400(1400)	3600	1000(880)	4500	1300(880)
16	6500	2400(1200)	3000	1000(600)	3500	1300(1000)
20	5300	2400(1200)	2200	1000(600)	2500	1300(700)

• Depth of cut



() : Grooving

MAGIC SHANK EXCHANGEABLE HEAD END MILLS SERIES


• Recommended cutting condition for DEG

MATERIAL	Aluminum Alloys		Aluminum Alloy Castings	
	A2017/A5052/A7075		AC/ADC	
Depth of cut	ap:1D1 ae:0.5D1		ap:1D1 ae:0.5D1	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
6	32000	9200	16000	3700
8	24000	9000	12000	3600
10	18000	8200	9000	3200
12	15000	7800	7600	3000
16	11500	7200	5700	2900


MATERIAL	Aluminum Alloys		Aluminum Alloy Castings	
	A2017/A5052/A7075		AC/ADC	
Depth of cut	ap:1D1		ap:1D1	
Dia. (D1)	SPEED (min ⁻¹)	FEED mm/min	SPEED (min ⁻¹)	FEED mm/min
6	32000	7400	16000	3000
8	24000	7200	12000	2900
10	18000	6500	9000	2600
12	15000	6200	7600	2500
16	11500	5800	5700	2300

• Depth of cut

• Side Milling




• Slotting



• Recommended cutting condition for DRC

MATERIAL	Aluminum 1070		Aluminum alloy 2014 / 4032 / 5052 / 6061 / 7075		Aluminum alloy AC85		
	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	SPEED (min ⁻¹)	FEED mm / min	
Side Milling	3	25000	1000	25000	1000	9000	350
	4	18000	1200	18000	1200	7000	400
	5	15000	1300	15000	1300	6000	450
	6	12000	1400	12000	1400	5000	500
	8	9000	1500	9000	1500	4000	550
	10	7000	1800	7000	1800	3000	600
Grooving	12	6000	1900	6000	1900	2500	650
	16	4500	1900	4500	1900	1500	650
	3	25000	800	25000	800	9000	350
	4	18000	800	18000	800	7000	400
	5	15000	900	15000	900	6000	450
	6	12000	1000	12000	1000	5000	500
8	9000	1000	9000	1000	4000	550	
10	7000	1200	7000	1200	3000	600	
12	6000	1300	6000	1300	2500	650	
16	4500	1300	4500	1300	1500	650	

• Depth of cut



• Recommended cutting condition for EX2SB (HRC30~HRC60)

Item No.	R	O.A.L	HRC30 - HRC60	
			SPEED min ⁻¹	FEED mm / min
EX2SB 1010	R5	150	6000	1200
EX2SB 1212	R6	150	5500	1500
EX2SB 1212	R6	200	4000	1000
EX2SB 1616	R8	150	5500	2000
EX2SB 1616	R8	200	3800	1000
EX2SB 2020	R10	150	4800	2000
EX2SB 2020	R10	200	4000	800
EX2SB 2020	R10	250	2600	500

Depth of cut: 0.15mm

• Recommended cutting condition for EX2SRD (HRC30~HRC60)

Item No.	D x R	O.A.L	HRC30 - HRC60	
			SPEED min ⁻¹	FEED mm / min
EX2SRD 1005	10.0 x 0.5	150	5800	1000
EX2SRD 1205	12.0 x 0.5	150	5500	1200
EX2SRD 1205	12.0 x 0.5	200	4000	350
EX2SRD 1605	16.0 x 0.5	150	5000	2000
EX2SRD 1605	16.0 x 0.5	200	3800	800
EX2SRD 2010	20.0 x 1.0	150	4500	2000
EX2SRD 2010	20.0 x 1.0	200	3800	800
EX2SRD 2010	20.0 x 1.0	250	2600	400

Depth of cut: 0.15mm

• Recommended cutting condition for EX2SEB (HRC30~HRC60)

Item No.	D	O.A.L	HRC30 - HRC60	
			SPEED min ⁻¹	FEED mm / min
EX2SEB 1010	10.0	150	5000	800
EX2SEB 1212	12.0	150	4800	1000
EX2SEB 1212	12.0	200	3800	400
EX2SEB 1616	16.0	150	4200	1000
EX2SEB 1616	16.0	200	3600	400
EX2SEB 2020	20.0	150	4200	1500
EX2SEB 2020	20.0	200	3200	600
EX2SEB 2020	20.0	250	2500	300

Depth of cut: 0.15mm

• Recommended cutting condition for EMT


Work Hardness (HRC)	Vc (m/min)	Tool Dia (mm) / Feed f (mm/tooth)									
		2.2	3.1	3.6	4.0	5.0	7.0	8.0	10.0	14.0	
HRC45-55	50-60	0.015	0.02	0.025	0.03	0.035	0.05	0.055	0.07	0.1	
HRC55-60	40-50	0.012	0.015	0.02	0.025	0.03	0.035	0.04	0.05	0.08	

• Recommended cutting condition for EMTS


Work Hardness (HRC)	Vc (m/min)	Tool Dia (mm) / Feed f (mm/tooth)				
		3.5	3.1	3.8	4.65	5.95
HRC45-55	50-60	0.015	0.02	0.025	0.03	0.035
HRC55-60	40-50	0.012	0.015	0.02	0.025	0.03

• Recommended cutting condition for EMTF

Work Hardness (HRC)	Vc (m/min)	Tool Dia (mm) / Feed f (mm/tooth)						
		2.35	3.1	3.8	4.65	5.95	7.8	9.0
HRC45-55	50-60	0.015	0.02	0.025	0.03	0.035	0.05	0.055
HRC55-60	40-50	0.012	0.015	0.02	0.025	0.03	0.035	0.04



Defined by: R262 (DIN 13)
Tolerance class: 6g/6H



• Recommended cutting condition for ECMP

MATERIAL	Carbon Steels/Cast Irons	Alloy Steels	Stainless Steels	Aluminum Alloys
	SS/S45C/FC	SCM/SKD	SUS304/SUS316L...	A2017/A5052/A7075
Cutting Speed (V)	50~80 m/min	35~60 m/min	20~40 m/min	100~150 m/min
Dia. (D1)	fz mm/min	fz mm/min	fz mm/min	fz mm/min
4	0.03~0.04	0.02~0.03	0.015~0.03	0.04~0.07
6	0.03~0.04	0.02~0.03	0.015~0.03	0.04~0.07
8	0.03~0.07	0.03~0.05	0.025~0.05	0.07~0.09
10	0.03~0.07	0.03~0.05	0.025~0.05	0.07~0.09
12	0.03~0.07	0.03~0.05	0.025~0.05	0.07~0.09

fz = Feed per Tooth

• Recommended cutting condition for ECMV

MATERIAL	Carbon Steels/Cast Irons	Alloy Steels	Stainless Steels	Aluminum Alloys
	SS/S45C/FC	SCM/SKD	SUS304/SUS316L...	A2017/A5052/A7075
Cutting Speed (V)	50~80 m/min	35~60 m/min	20~40 m/min	100~150 m/min
Dia. (D1)	fz mm/min	fz mm/min	fz mm/min	fz mm/min
4	0.03~0.04	0.02~0.03	0.015~0.03	0.04~0.07
6	0.03~0.04	0.02~0.03	0.015~0.03	0.04~0.07
8	0.03~0.07	0.03~0.05	0.025~0.05	0.07~0.09
10	0.03~0.07	0.03~0.05	0.025~0.05	0.07~0.09
12	0.03~0.07	0.03~0.05	0.025~0.05	0.07~0.09

fz = Feed per Tooth

• Recommended cutting condition for CD CDA CDB CDAC CDBC

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	HRC35		HRC45		HRC55	
DIAMETER	Vc (m/min)	FEED (mm/rev.)	Vc (m/min)	FEED (mm/rev.)	Vc (m/min)	FEED (mm/rev.)
	2	110-140	0.05-0.08	85-115	0.05-0.07	25-50
3	110-140	0.12-0.15	85-115	0.08-0.11	25-50	0.04-0.48
4	110-140	0.16-0.20	85-115	0.10-0.15	25-50	0.05-0.06
5	110-140	0.16-0.20	85-115	0.10-0.15	25-50	0.05-0.06
6	110-140	0.20-0.24	85-115	0.12-0.18	25-50	0.06-0.08
8	110-140	0.25-0.30	85-115	0.16-0.23	25-50	0.08-0.11
10	110-140	0.31-0.32	85-115	0.20-0.30	25-50	0.10-0.12
12	110-140	0.31-0.38	85-115	0.20-0.30	25-50	0.10-0.12
16	110-140	0.40-0.48	85-115	0.25-0.38	25-50	0.12-0.15
20	110-140	0.50-0.65	85-115	0.30-0.48	25-50	0.16-0.20

• Recommended cutting condition for CDC CDCC

MATERIAL	Carbon Steels . Alloy Steels S45C, FC, FCD, SCM, S50C, SKS...		Alloy Steels . Tool Steels SCr, SNCM, SKD11, SKD61, NAK80...		Hardened Steels SKD11	
	HRC35		HRC45		HRC55	
DIAMETER	Vc (m/min)	FEED (mm/rev.)	Vc (m/min)	FEED (mm/rev.)	Vc (m/min)	FEED (mm/rev.)
	3	110-140	0.08-0.11	85-115	0.05-0.08	25-50
4	110-140	0.10-0.15	85-115	0.06-0.11	25-50	0.03-0.04
5	110-140	0.10-0.15	85-115	0.06-0.11	25-50	0.03-0.04
6	110-140	0.12-0.18	85-115	0.08-0.15	25-50	0.05-0.06
8	110-140	0.16-0.23	85-115	0.11-0.18	25-50	0.06-0.07
10	110-140	0.20-0.30	85-115	0.14-0.24	25-50	0.07-0.09
12	110-140	0.20-0.30	85-115	0.14-0.24	25-50	0.08-0.10


• Recommended cutting condition for CRA

Dia. (mm)	Vc (m/min)		Dia. (mm)	Feed (mm/rev)	
	Carbon Steels, Alloy Steels ~HRC40	Alloy Steels, Tool Steels HRC45~		Carbon Steels, Alloy Steels ~HRC40	Alloy Steels, Tool Steels HRC45~
2.0	14	8	2.0	0.05	0.04
3.0	14	8	3.0	0.08	0.06
4.0	14	8	4.0	0.10	0.08
5.0	14	8	5.0	0.10	0.08
6.0	14	8	6.0	0.12	0.10
8.0	14	8	8.0	0.16	0.12
10.0	14	8	10.0	0.20	0.16
12.0	14	8	12.0	0.20	0.16

Ball Nose End Milling Real Diameter

Ball : R	Dia.	(Ad) Depth Of Cut (mm)														
		0.01	0.02	0.03	0.04	0.05	0.08	0.1	0.15	0.2	0.3	0.5	0.8	1.0	2.0	3.0
0.1	0.2	0.087	0.12	0.143	0.16	0.173	0.196	0.2	-----	-----	-----	-----	-----	-----	-----	-----
0.2	0.4	0.125	0.174	0.211	0.24	0.265	0.32	0.35	0.39	0.4	-----	-----	-----	-----	-----	-----
0.3	0.6	0.154	0.215	0.262	0.299	0.332	0.41	0.45	0.52	0.57	0.6	-----	-----	-----	-----	-----
0.4	0.8	0.178	0.25	0.304	0.349	0.387	0.48	0.53	0.62	0.69	0.77	0.77	-----	-----	-----	-----
0.5	1	0.199	0.28	0.341	0.392	0.436	0.54	0.6	0.71	0.8	0.92	1	-----	-----	-----	-----
1	2	0.282	0.398	0.486	0.56	0.624	0.78	0.87	1.05	1.2	1.43	1.73	1.96	2	-----	-----
1.5	3	0.346	0.488	0.597	0.688	0.768	0.97	1.08	1.31	1.5	1.8	2.24	2.65	2.83	2.83	-----
2	4	0.399	0.564	0.69	0.796	0.889	1.12	1.25	1.52	1.74	2.11	2.65	3.2	3.46	4	-----
2.5	5	0.447	0.631	0.772	0.891	0.995	1.25	1.4	1.71	1.96	2.37	3	3.67	4	4.9	4.9
3	6	0.489	0.692	0.846	0.977	1.091	1.38	1.54	1.87	2.15	2.62	3.32	4.08	4.47	5.66	6
4	8	0.565	0.799	0.978	1.129	1.261	1.59	1.78	2.17	2.5	3.04	3.87	4.8	5.29	6.93	7.75
5	10	0.632	0.894	1.094	1.262	1.411	1.78	1.99	2.43	2.8	3.41	4.36	5.43	6	8	9.17
6	12	0.693	0.979	1.198	1.383	1.546	1.95	2.18	2.67	3.07	3.75	4.8	5.99	6.63	8.94	10.39
7	14	0.748	1.058	1.295	1.495	1.67	2.11	2.36	2.88	3.32	4.05	5.2	6.5	7.21	9.8	11.49
8	16	0.8	1.131	1.384	1.598	1.786	2.26	2.52	3.08	3.56	4.34	5.57	6.97	7.75	10.58	12.49
9	18	0.848	1.199	1.468	1.695	1.895	2.39	2.68	3.27	3.77	4.61	5.92	7.42	8.25	11.31	13.42
10	20	0.894	1.264	1.548	1.787	1.997	2.52	2.82	3.45	3.98	4.86	6.24	7.84	8.72	12	14.28

Calculation of Real Dia. $d=2\sqrt{Ad(D-Ad)}$



Spindle Speed Table

Dia	V (m/min)														
	20	30	40	50	60	70	80	90	100	120	150	180	200	250	300
0.5	12740	19110	25480	31850	38220	44590	50960	57320	63690	76430	95540	114650	127390	159240	191080
0.6	10620	15920	21230	26540	31850	37150	42460	47770	53080	63690	79620	95540	106160	132700	159240
0.7	9100	13650	18200	22750	27300	31850	36400	40950	45500	54590	68240	81890	90990	113740	136490
0.8	7960	11940	15920	19900	23890	27870	31850	35830	39810	47770	59710	71660	79620	99520	119430
0.9	7080	10620	14150	17690	21230	24770	28310	31850	35390	42640	53080	63690	70770	88460	106160
1	6370	9550	12740	15920	19110	22290	25480	28660	31850	38220	47770	57320	63390	79620	95540
2	3180	4780	6370	7960	9550	11150	12740	14330	15920	19110	23890	28660	31850	39810	47770
3	2120	3180	4250	5310	6370	7430	8490	9550	10620	12740	15920	19110	21230	26540	31850
4	1590	2390	3180	3980	4780	5570	6370	7170	7960	9550	11940	14330	15920	19900	23890
5	1270	1910	2550	3180	3820	4460	5100	5730	6370	7640	9550	11460	12740	15920	19110
6	1060	1590	2120	2650	3180	3720	4250	4780	5310	6370	7960	9550	10620	13270	15920
8	800	1190	1590	1990	2390	2790	3180	3580	3980	4780	5970	7170	7960	9950	11940
10	640	960	1270	1590	1910	2230	2550	2870	3180	3820	4780	5730	6370	7960	9550
12	530	800	1060	1330	1590	1860	2120	2390	2650	3180	3980	4780	5310	6630	7960
14	450	680	910	1140	1360	1590	1820	2050	2270	2730	3410	4090	4550	5690	6820
15	420	640	850	1060	1270	1490	1700	1910	2120	2550	3180	3820	4250	5310	6370
16	400	600	800	1000	1190	1390	1590	1790	1990	2390	2990	3580	3980	4980	5970
20	320	480	640	800	960	1110	1270	1430	1590	1910	2390	2870	3180	3980	4780
25	250	380	510	640	760	890	1020	1150	1270	1530	1910	2290	2550	3180	3820

Calculation for Cutting Speed, Spindle Speed and Feed

$$\text{Cutting Speed } V = \frac{\pi \times D \times N}{1000}$$


$$\text{Spindle Speed } N = V \div \pi \div D \times 1,000$$

$$\text{Feed } F = N \times fz \times Z$$

$$\text{Feed per Tooth } fz = \frac{F}{N \times Z}$$

V = Cutting Speed (m/min)
 $\pi = 3.14$ The Circular Constant
 D = Diameter (mm)
 N = RPM (min⁻¹)
 F = Feed (mm/min)
 fz = Feed per Tooth (mm/tooth)
 Z = Number of Flutes

Selection of Number of Flute

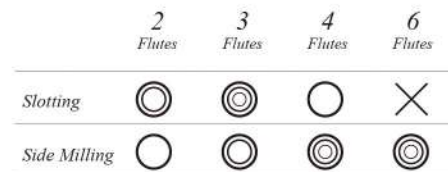

Generally 2-flutes and 3-flutes are selected for slotting because of the larger chip pocket. 4-flutes and 6-flutes are recommended for side milling as no problem of chip disposal.

Cutting Speed (V)

Appropriate Cutting Speed should be decided by parameters such as tool material, diameter, length of cut, work material, cutting machine, rigidity of tool holder, machining configuration, accuracy, cutting fluid, and etc.
 Generally tool material and work material are main factors to determine the Cutting Speed.

Work Materials	Cutting Speed (m/min)	
	Carbide	Coated Carbide
Carbon Steels (S50C)	20 ~ 40	40 ~ 80
Alloy Steels (SCM,SKD)	20 ~ 35	35 ~ 60
Prehardened Steels (NAK,HPM)	15 ~ 30	30 ~ 50
Stainless Steels (SUS304)	5 ~ 20	10 ~ 30
Hardened Steels (SKD61,HRC60)	-	20 ~ 40

Feed per Tooth (fz)

Feed per Tooth is an important element for efficient machining which should be determined by parameters such as tool diameter, type, work material, cutting machine, rigidity of tool holder, machining configuration, accuracy and cutting depth.

Diameter(mm)	Feed per tooth (mm/tooth)	
	2-Flutes	4-Flutes
1	0.001 ~ 0.005	
6	0.02 ~ 0.04	0.01 ~ 0.03
10	0.04 ~ 0.08	0.03 ~ 0.06
20	0.08 ~ 0.12	0.06 ~ 0.1

Comparison Table of Hardness

Rockwell Hardness C Scale 150kg Brale (HRC)	Diamond Pyramid Hardness Number, Vickers (HV)	Brinell Hardness Standard 10mm Ball 29.42kN (HB)	Rockwell Hardness A Scale 60kg Brale (HRA)	Shore Scleroscope Hardness Number (HS)	Approx Tensile Strength N/mm ²
68	940	-	85.6	97	-
67	900	-	85.5	95	-
66	865	-	84.5	92	-
65	832	-	83.9	91	-
64	800	-	83.4	88	-
63	772	-	82.8	87	-
62	746	-	82.3	85	-
61	720	-	81.8	83	-
60	697	-	81.2	81	-
59	674	-	80.7	80	-
58	653	-	80.1	78	-
57	633	-	79.6	76	-
56	613	-	79.0	75	-
55	595	-	78.5	74	2079
54	577	-	78.0	72	2010
53	560	-	77.4	71	1952
52	544	500	76.8	69	1883
51	528	487	76.3	68	1824
50	513	475	75.9	67	1755
49	498	464	75.2	66	1687
48	484	451	74.7	64	1639
47	471	442	74.1	63	1578
46	458	432	73.6	62	1530
45	446	421	73.1	60	1481
44	434	409	72.5	58	1432
43	423	400	72.0	57	1383
42	412	390	71.5	56	1334
41	402	381	70.9	55	1294
40	392	371	70.4	54	1245
39	382	362	69.9	52	1216
38	372	353	69.4	51	1177
37	363	344	68.9	50	1157
36	354	336	68.4	49	1118
35	345	327	67.9	48	1079
34	336	319	67.4	47	1059
33	327	311	66.8	46	1030
32	318	301	66.3	44	1000
31	310	294	65.8	43	981
30	302	286	65.3	42	952
29	294	279	64.7	41	932
28	285	271	64.3	41	912
27	279	264	63.8	40	883
26	272	258	63.3	38	863
25	266	253	62.8	38	843
24	260	247	62.4	37	824
23	254	243	62.0	36	804
22	248	237	61.5	35	785
21	243	231	61.0	35	775
20	238	226	60.5	34	755
(18)	230	219	-	33	736
(16)	222	212	-	32	706
(14)	213	203	-	31	677
(12)	204	194	-	29	647
(10)	196	187	-	28	618
(8)	188	179	-	27	598
(6)	180	171	-	26	579
(4)	173	165	-	25	549
(2)	166	158	-	24	530
(0)	160	152	-	24	520

Factors for End Mill Operation

Factor	Instruction and Advice
Rigidity of Machine	1. Use a right machine. 2. Adjust cutting conditions according to the rigidity of machine.
Collet Chuck and Runout of End Mill	1. Use a right and precise collet chuck. 2. Minimize the runout of end mill.
Work Clamp	1. Work piece must be firmly clamped. 2. In case work piece cannot be firmly clamped, relieve cutting condition.
Cutting Fluid and Chips	1. Give a sufficient cutting fluid. 2. Recommend water-base cutting fluid for heavy cutting. 3. Some end mills apply dry cutting only. 4. Use air blow for dry cutting. 5. Remove chips from working area.
Selection of End Mill	1. Select most suitable end mills according to work material and dimension. 2. Refer to the index table on front page.
Cutting Conditions	1. Refer to recommended milling condition table. 2. It is necessary to adjust conditions according to the machine rigidity and clamping condition of work piece.
Overhang of End Mill from tool holder	1. Overhang of end mill must be as short as possible from tool holder. 2. In case overhang cannot be shorten, relieve cutting condition.

Troubleshooting for End Mill Operation

Symptoms of troubles	Cause	Solution
Chattering	<ul style="list-style-type: none"> · Excessive spindle speed · Excessive feed · Excessive long of effective length or overhang of end mill · Work piece is not firmly clamped · Wear of cutting edge progressed · Excessive chucking runout 	<ul style="list-style-type: none"> · Reduce spindle speed · Reduce feed · Adjust effective length and overhang as short as possible · Clamped work piece firmly · Use new end mill or regrind · Adjust chucking runout
Breakage of end mill	<ul style="list-style-type: none"> · Excessive depth of cut · Chips clogged · Excessive feed per tooth · Wear of cutting edge progressed 	<ul style="list-style-type: none"> · Reduce depth of cut · Adjust coolant nozzle to right direction to dispose chips · Reduce feed per tooth · Use new end mill or regrind
Chipping of cutting edge	<ul style="list-style-type: none"> · Excessive depth of cut · Excessive feed · Work piece is not firmly clamped · Excessive spindle speed · Excessive long of effective length or overhang of end mill · Wear of cutting edge progressed · When processing, the workpiece will be dissolved then stick on the tool flute · Excessive cooling 	<ul style="list-style-type: none"> · Reduce depth of cut · Reduce feed · Clamped work piece firmly · Reduce spindle speed · Adjust effective length and overhang as short as possible · Use new end mill or regrind · Choose appropriate coating · Use air blow or oil mist
Abnormal wear	<ul style="list-style-type: none"> · Excessive spindle speed · Tool low feed 	<ul style="list-style-type: none"> · Reduce spindle speed · Increase feed
Clogging and Depositing	<ul style="list-style-type: none"> · Chips are not well disposed · Excessive feed · Excessive depth of cut · Inappropriate number of flute · Wear of cutting edge progressed 	<ul style="list-style-type: none"> · Adjust coolant nozzle to right direction to dispose chips · Reduce feed · Reduce depth of cut · Use fewer flutes end mill · Use new end mill or regrind
Deflection of end mill	<ul style="list-style-type: none"> · Excessive feed · Excessive depth of cut · Excessive long of effective length or overhang of end mill · Large helix angle of flutes 	<ul style="list-style-type: none"> · Reduce feed · Reduce depth of cut · Adjust effective length and overhang as short as possible · Use smaller helix angle
Burr on finished surface	<ul style="list-style-type: none"> · Wear of cutting edge progressed · Small helix angle of flutes · Excessive depth of cut 	<ul style="list-style-type: none"> · Use new end mill or regrind · Use smaller helix angle · Reduce depth of cut
Poor surface roughness	<ul style="list-style-type: none"> · Wear of cutting edge progressed · Chips bite · Excessive feed · Excessive long of effective length or overhang of end mill · Too low spindle speed · Stock removals vary for finishing · Excessive chucking runout 	<ul style="list-style-type: none"> · Use new end mill or regrind · Use coolant to remove chips · Reduce feed · Adjust effective length and overhang as short as possible · Increase spindle speed · Improve semi-finishing process · Adjust chucking runout
Poor machining accuracy	<ul style="list-style-type: none"> · Inconsistent thermal extension of spindle · Stock removals vary for finishing · Excessive feed · Excessive chucking runout 	<ul style="list-style-type: none"> · Warm up spindle by idling before starting operation · Improve semi-finishing process · Reduce feed · Adjust chucking runout